


PowerPAK®
MLP(QFN), 4x4/3x3
DFN-10, 3x3
MLP33-8/10

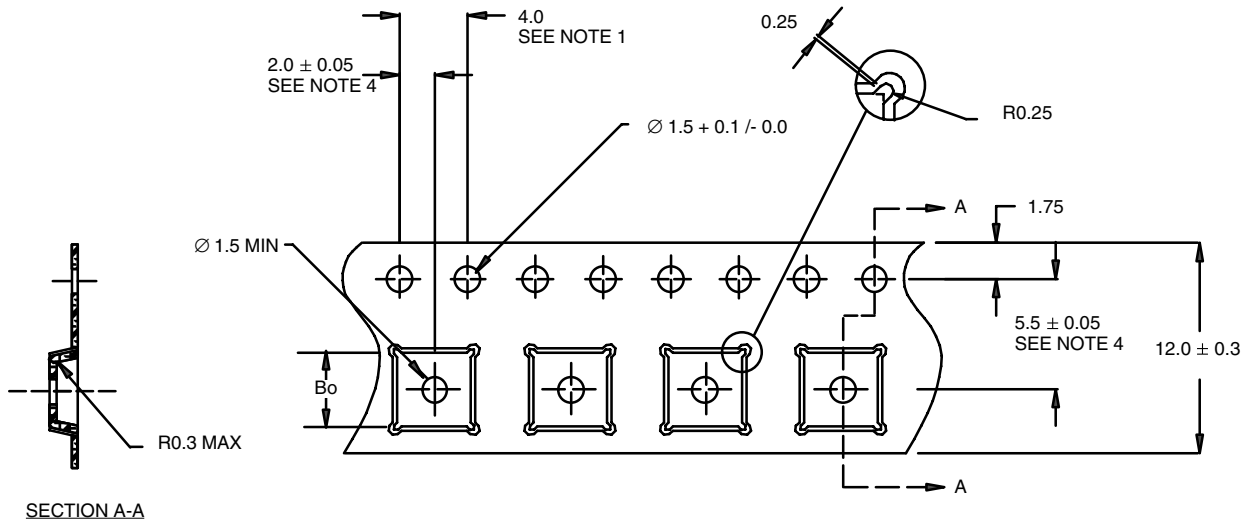

NOTES:

1. 10 sprocket hole pitch cumulative tolerance ± 0.2 mm.
2. Camber not to exceed 1 mm in 100 mm.
3. Material: Black conductive or black static dissipative
4. It should be measured from:
 - a. sprocket hole to pocket center
 - and
 - b. sprocket hole to pocket hole
5. All sizes in mm unless specified.
6. Tolerances will be ± 0.1 mm unless specified.

VERSION	PACKAGE	B ₀
- 1	MLP(QFN), 4x4	4.35
- 2	MLP(QFN), 3x3	3.35
	MLP33-8/10	
	DFN-10, 3x3	
ECN T-06114—Rev. F, 17-Apr-06 DWG: 93-5225-x		

QUANTITY PER REEL	
T1	2500
T1	3000 For MLP33-8/10