




**MLP33-6, 8, and 10**  
**PowerPAK® MLP33-6, 8 and 10**

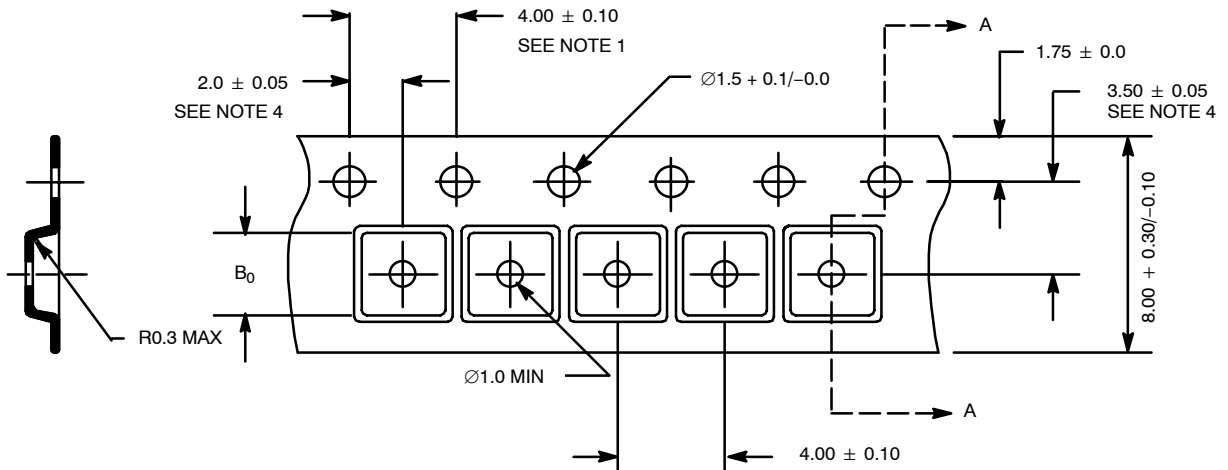

NOTES:

1. 10 sprocket hole pitch cumulative tolerance  $\pm 0.2$  mm.
2. Camber not to exceed 1 mm in 100 mm.
3. Material: Black conductive or black static dissipative
4. It should be measured from:
  - a. sprocket hole to pocket center and
  - b. sprocket hole to pocket hole
5. All sizes in mm unless specified.
6. Tolerances will be  $\pm 0.1$  mm unless specified.

QUANTITY PER REEL	
T1	3000
ECN: S-40510—Rev. D, 17-May-04 DWG: 93-5227-1	