


PowerPAK® SC-70

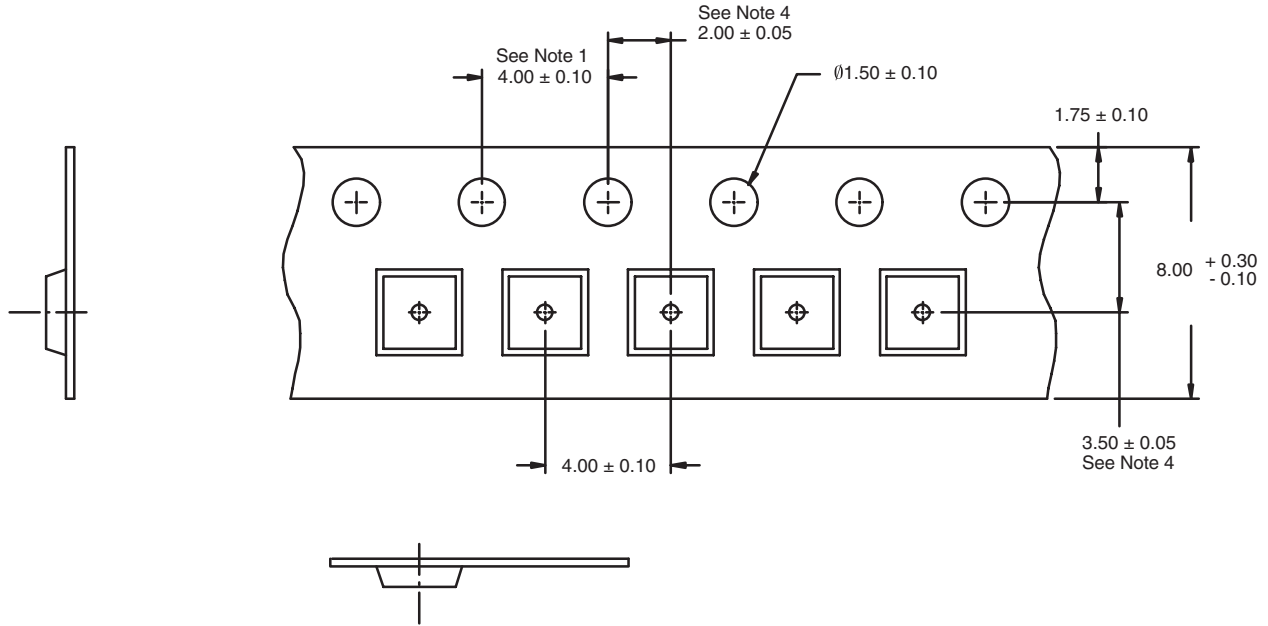

NOTES:

1. 10 sprocket hole pitch cumulative tolerance ± 0.2 .
2. Camber not to exceed 1 mm in 100 mm.
3. Material: PS + C or PC.
4. Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole.
5. All sizes in mm unless specified.

QUANTITY PER REEL	
T1	3000
ECN: C-04262 - Rev. A, 28-Jun-04	
DWG: 93-5240-x	