PowerPAK® ChipFET®

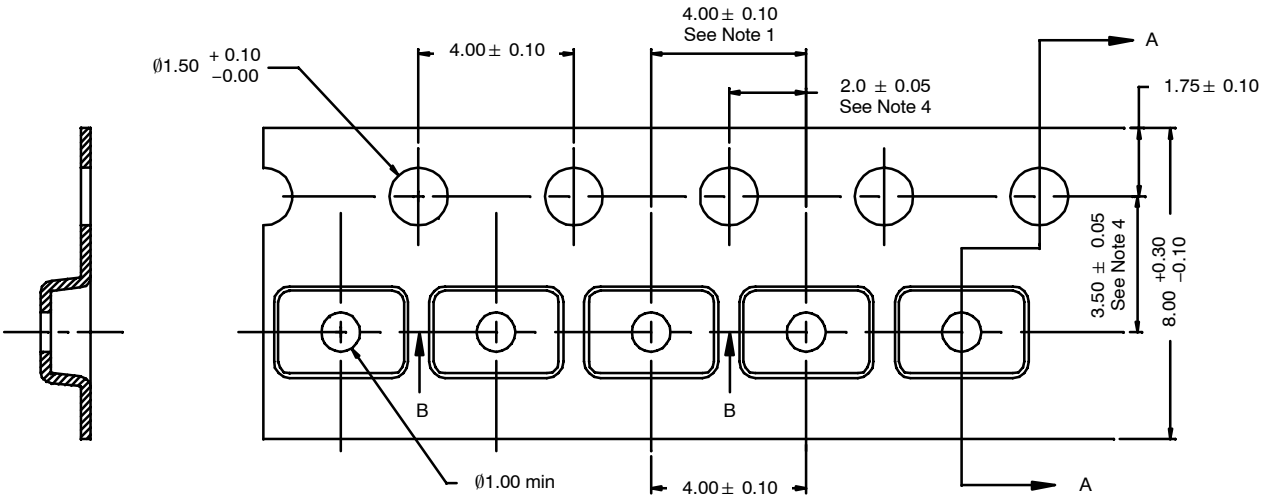

SECTION A-A



SECTION B-B

NOTES:
1. 10 sprocket hole pitch cumulative tolerance ± 0.2 mm.
2. Camber not to exceed 1 mm in 100 mm.
3. Material: Black conductive or black static dissipative
4. It should be measured from:
   a. sprocket hole to pocket center
   and
   b. sprocket hole to pocket hole
5. All sizes in mm unless specified.
6. Tolerances will be ± 0.1 mm unless specified.

QUANTITY PER REEL	
T1	3,000
ECN: T-05163—Rev. A, 11-Apr-05 DWG: 93-5248-x	