


## Fast Soft Recovery (Rectifier Diode), 85 A



PowerTab™



### FEATURES

- Output rectification and freewheeling in inverters, choppers and converters
- Input rectifications where severe restrictions on conducted EMI should be met
- Compliant to RoHS directive 2002/95/EC
- Designed and qualified for industrial level



**RoHS**  
COMPLIANT

### DESCRIPTION

The 85EPF12 fast soft recovery rectifier series has been optimized for combined short reverse recovery time and low forward voltage drop.

The glass passivation ensures stable reliable operation in the most severe temperature and power cycling conditions. Available in the new PowerTab™ package, this new series is suitable for a large range of applications combining excellent die to footprint ratio and sturdiness connectivity for use in high current environments.

PRODUCT SUMMARY	
$I_{F(RMS)}$	160 A
$V_F$ at 100 A	< 1.4 V
$t_{rr}$	95 ns
$V_{RRM}$	1200 V

MAJOR RATINGS AND CHARACTERISTICS			
SYMBOL	CHARACTERISTICS	VALUES	UNITS
$I_{F(AV)}$	Rect. conduction 50 % duty cycle at $T_C = 85\text{ °C}$	85	A
$I_{F(RMS)}$		160	
$V_{RRM}$	Range	1200	V
$I_{FSM}$		110	A
$V_F$	100 A, $T_J = 25\text{ °C}$	1.4	V
$t_{rr}$	1 A, - 100 A/ $\mu$ s	95	ns
$T_J$	Range	- 40 to 150	°C

VOLTAGE RATINGS			
TYPE NUMBER	$V_{RRM}$ , MAXIMUM PEAK REVERSE VOLTAGE V	$V_{RSM}$ , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	$I_{RRM}$ AT 150 °C mA
85EPF12	1200	1300	15

ABSOLUTE MAXIMUM RATINGS				
PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS
Maximum average forward current	$I_{F(AV)}$	$T_C = 85\text{ °C}$ , 180° conduction half sine wave	85	A
Maximum peak one cycle non-repetitive surge current	$I_{FSM}$	10 ms sine pulse, rated $V_{RRM}$ applied	1100	
		10 ms sine pulse, no voltage reapplied	1250	
Maximum $I^2t$ for fusing	$I^2t$	10 ms sine pulse, rated $V_{RRM}$ applied	5000	A <sup>2</sup> s
		10 ms sine pulse, no voltage reapplied	7000	
Maximum $I^2\sqrt{t}$ for fusing	$I^2\sqrt{t}$	$t = 0.1\text{ ms to }10\text{ ms}$ , no voltage reapplied	70 000	A <sup>2</sup> $\sqrt{s}$

# 85EPF12 Soft Recovery Series



Vishay High Power Products

Fast Soft Recovery  
(Rectifier Diode), 85 A

ELECTRICAL SPECIFICATIONS					
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNITS
Maximum forward voltage drop	$V_{FM}$	85 A, $T_J = 25\text{ }^\circ\text{C}$		1.36	V
Forward slope resistance	$r_t$	$T_J = 150\text{ }^\circ\text{C}$		4.03	m $\Omega$
Threshold voltage	$V_{F(TO)}$			0.87	V
Maximum reverse leakage current	$I_{RM}$	$T_J = 25\text{ }^\circ\text{C}$	$V_R = \text{Rated } V_{RRM}$	0.1	mA
		$T_J = 150\text{ }^\circ\text{C}$		15	

RECOVERY CHARACTERISTICS					
PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS	
Reverse recovery time	$t_{rr}$	$I_F$ at 85 A <sub>pk</sub> 25 A/ $\mu$ s 25 $^\circ\text{C}$	480	ns	
Reverse recovery current	$I_{rr}$		7.1	A	
Reverse recovery charge	$Q_{rr}$		2.1	$\mu\text{C}$	
Snap factor	S		0.5		

THERMAL - MECHANICAL SPECIFICATIONS				
PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS
Maximum junction and storage temperature range	$T_J, T_{Stg}$		- 40 to 150	$^\circ\text{C}$
Maximum thermal resistance, junction to case	$R_{thJC}$	DC operation	0.35	$^\circ\text{C/W}$
Maximum thermal resistance, junction to ambient	$R_{thJA}$		40	
Typical thermal resistance, case to heatsink	$R_{thCS}$	Mounting surface, smooth and greased	0.2	
Approximate weight			6	g
			0.21	oz.
Mounting torque	minimum		6 (5)	kgf · cm (lbf · in)
	maximum		12 (10)	
Marking device		Case style PowerTab™	85EPF12	

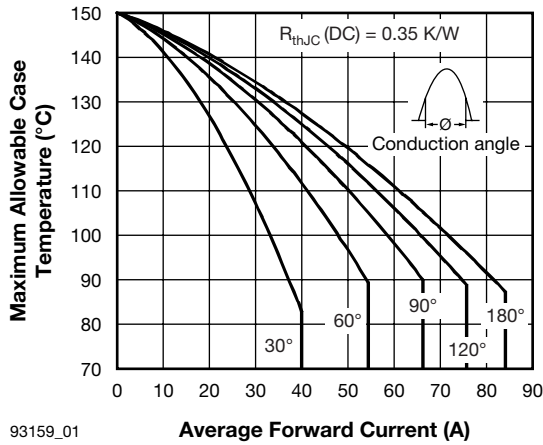


Fig. 1 - Current Rating Characteristics

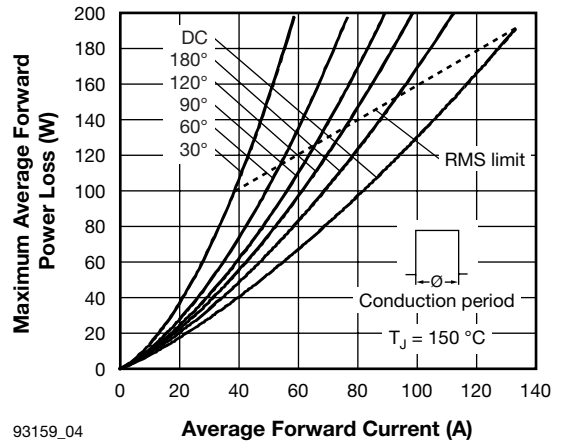


Fig. 4 - Forward Power Loss Characteristics

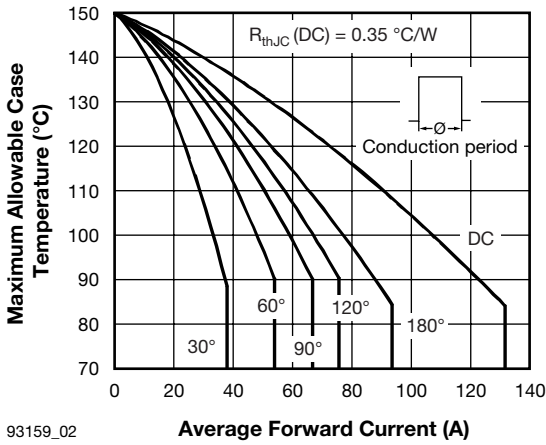


Fig. 2 - Current Rating Characteristics

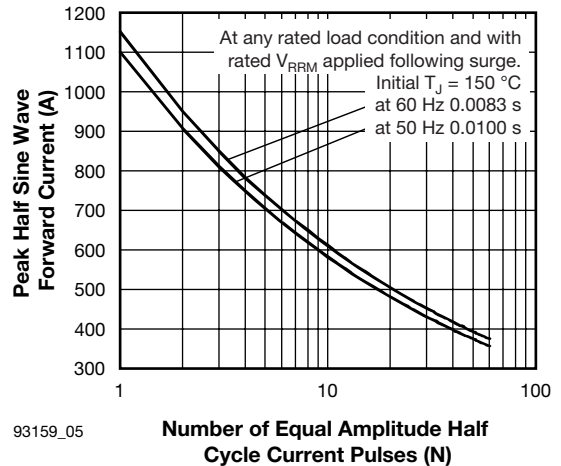


Fig. 5 - Maximum Non-Repetitive Surge Current

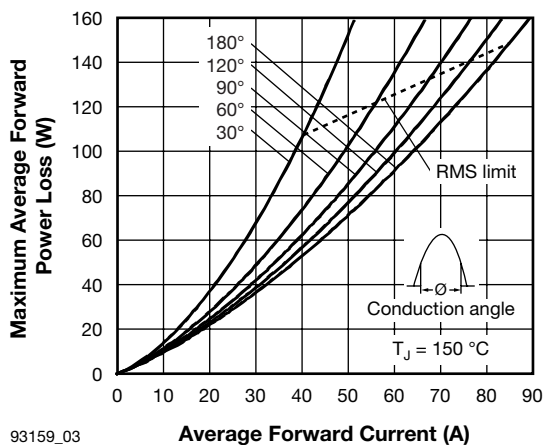


Fig. 3 - Forward Power Loss Characteristics

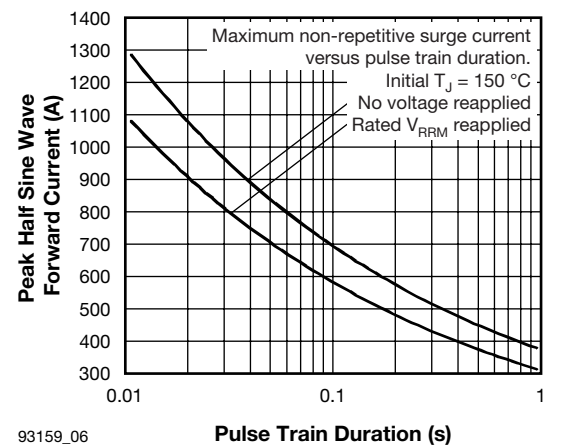



Fig. 6 - Maximum Non-Repetitive Surge Current

# 85EPF12 Soft Recovery Series




Vishay High Power Products


Fast Soft Recovery  
(Rectifier Diode), 85 A

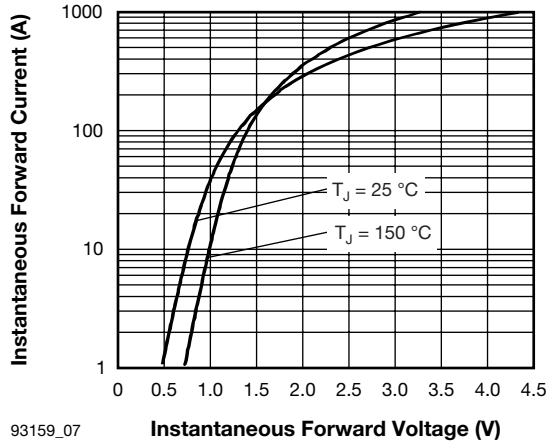


93159\_07  
Instantaneous Forward Voltage (V)  
Fig. 7 - Forward Voltage Drop Characteristics

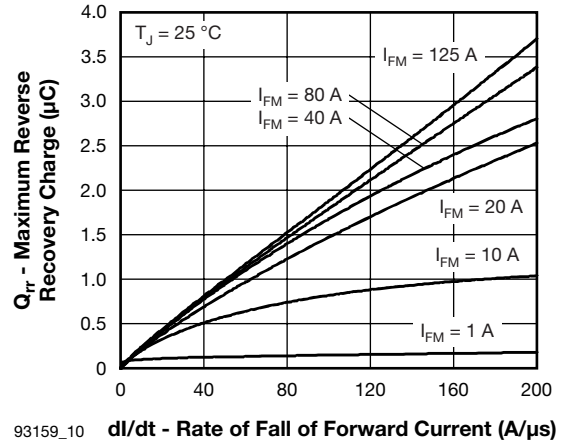


93159\_10  
dl/dt - Rate of Fall of Forward Current (A/µs)  
Fig. 10 - Recovery Charge Characteristics,  $T_J = 25\text{ °C}$

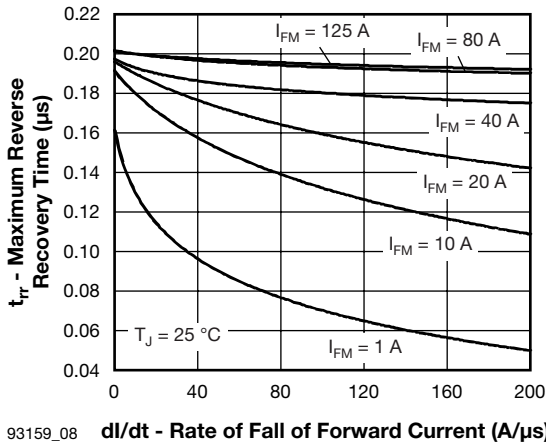


93159\_08  
dl/dt - Rate of Fall of Forward Current (A/µs)  
Fig. 8 - Recovery Time Characteristics,  $T_J = 25\text{ °C}$

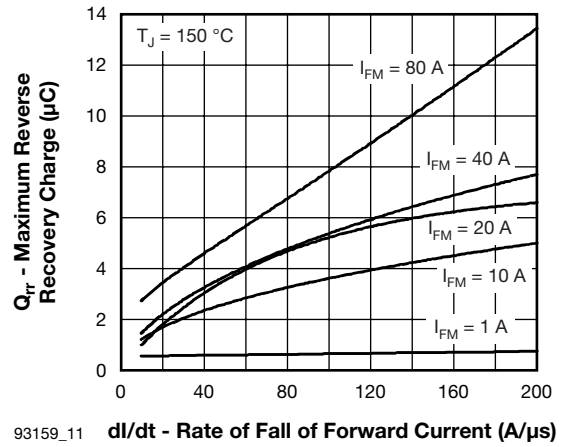

93159\_11  
dl/dt - Rate of Fall of Forward Current (A/µs)  
Fig. 11 - Recovery Charge Characteristics,  $T_J = 150\text{ °C}$

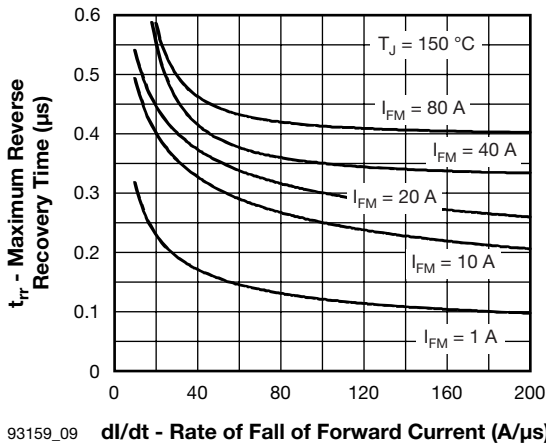

93159\_09  
dl/dt - Rate of Fall of Forward Current (A/µs)  
Fig. 9 - Recovery Time Characteristics,  $T_J = 150\text{ °C}$

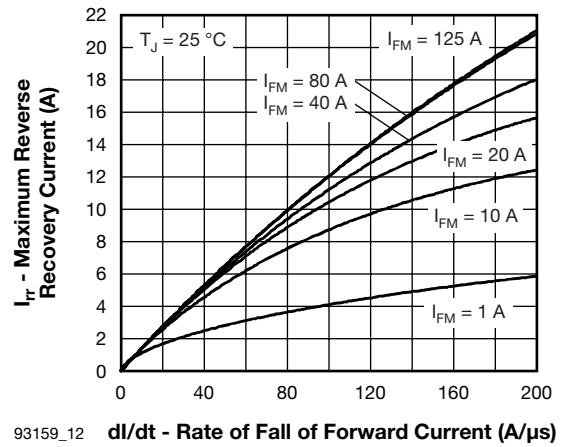


93159\_12  
dl/dt - Rate of Fall of Forward Current (A/µs)  
Fig. 12 - Recovery Current Characteristics,  $T_J = 25\text{ °C}$




# 85EPF12 Soft Recovery Series

Fast Soft Recovery (Rectifier Diode), 85 A Vishay High Power Products

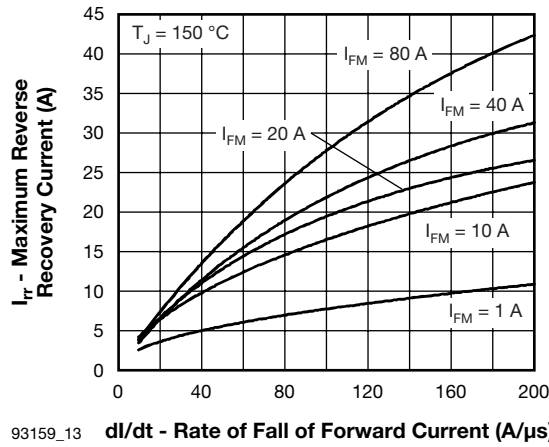

93159\_13  $di/dt$  - Rate of Fall of Forward Current ( $\text{A}/\mu\text{s}$ )  
Fig. 13 - Recovery Current Characteristics,  $T_J = 150^\circ\text{C}$

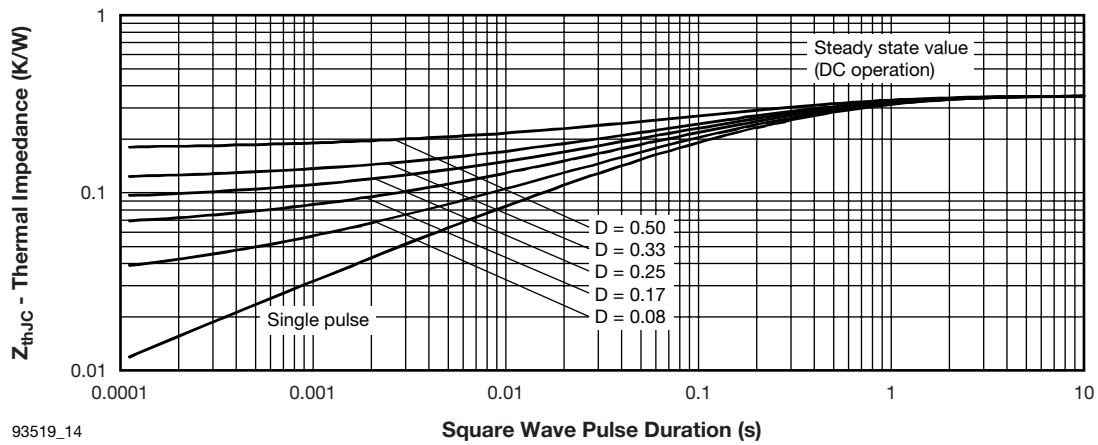

93519\_14  
Fig. 14 - Thermal Impedance  $Z_{thJC}$  Characteristics


# 85EPF12 Soft Recovery Series



Vishay High Power Products

Fast Soft Recovery  
(Rectifier Diode), 85 A

## ORDERING INFORMATION TABLE

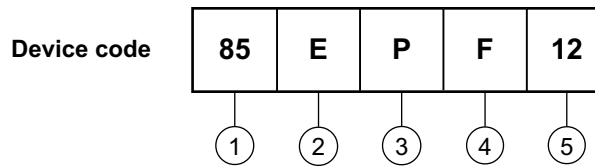

- 1** - Current rating
- 2** - Circuit configuration:  
E = Single diode
- 3** - Package:  
P = TO-247AC
- 4** - Type of silicon:  
F = Fast recovery
- 5** - Voltage code x 100 =  $V_{RRM}$  (12 = 1200 V)

LINKS TO RELATED DOCUMENTS	
Dimensions	<a href="http://www.vishay.com/doc?95240">www.vishay.com/doc?95240</a>
Part marking information	<a href="http://www.vishay.com/doc?95370">www.vishay.com/doc?95370</a>
Application note	<a href="http://www.vishay.com/doc?95179">www.vishay.com/doc?95179</a>



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.