


Glass Passivated Ultrafast Rectifier



FEATURES

- Cavity-free glass-passivated junction
- Ultrafast reverse recovery time
- Low forward voltage drop
- Low switching losses, high efficiency
- High forward surge capability
- Meets environmental standard MIL-S-19500
- Solder dip 275 °C max. 10 s, per JESD 22-B106
- AEC-Q101 qualified
- Compliant to RoHS directive 2002/95/EC and in accordance to WEEE 2002/96/EC

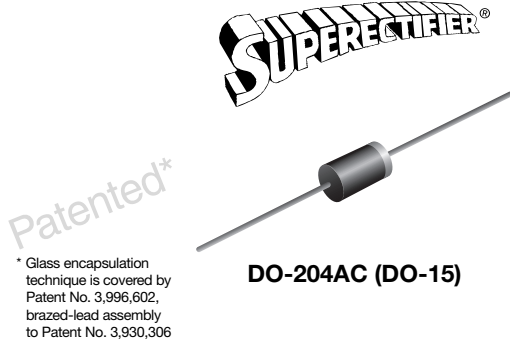

RoHS
COMPLIANT

TYPICAL APPLICATIONS

For use in high frequency rectification and freewheeling application in switching mode converters and inverters for consumer, computer and telecommunication.

MECHANICAL DATA

Case: DO-204AC, molded epoxy over glass body
Molding compound meets UL 94 V-0 flammability rating
Base P/N-E3 - RoHS compliant, commercial grade
Base P/NHE3 - RoHS compliant, AEC-Q101 qualified

Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD 22-B102
E3 suffix meets JESD 201 class 1A whisker test, HE3 suffix meets JESD 201 class 2 whisker test

Polarity: Color band denotes cathode end

PRIMARY CHARACTERISTICS	
$I_{F(AV)}$	1.0 A
V_{RRM}	800 V, 1000 V
I_{FSM}	30 A
t_{rr}	75 ns
V_F	1.3 V
$T_J \text{ max.}$	175 °C

MAXIMUM RATINGS ($T_A = 25 \text{ °C}$ unless otherwise noted)				
PARAMETER	SYMBOL	BYV26DGP	BYV26EGP	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	800	1000	V
Maximum RMS voltage	V_{RMS}	560	700	V
Maximum DC blocking voltage	V_{DC}	800	1000	V
Maximum average forward rectified current 0.375" (9.5 mm) lead length (fig. 1)	$I_{F(AV)}$	1.0		A
Peak forward surge current 10 ms single half sine-wave superimposed on rated load	I_{FSM}	30		A
Non repetitive peak reverse energy	$E_{RSM}^{(1)}$	10		mJ
Operating junction and storage temperature range	T_J, T_{STG}	- 65 to + 175		°C

Note

(1) Peak reverse energy measured at $I_R = 400 \text{ mA}$, $T_J = T_J \text{ max.}$ on inductive load, $t = 20 \text{ } \mu\text{s}$

ELECTRICAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)					
PARAMETER	TEST CONDITIONS	SYMBOL	BYV26DGP	BYV26EGP	UNIT
Minimum avalanche breakdown voltage	100 μA	V_{BR}	900	1100	V
Maximum instantaneous forward voltage	1.0 A	V_F	$T_J = 25\text{ }^\circ\text{C}$	2.5	V
			$T_J = 175\text{ }^\circ\text{C}$	1.3	
Maximum DC reverse current at rated DC blocking voltage		I_R	$T_A = 25\text{ }^\circ\text{C}$	5.0	μA
			$T_A = 165\text{ }^\circ\text{C}$	150	
Max. reverse recovery time	$I_F = 0.5\text{ A}$, $I_R = 1.0\text{ A}$, $I_{rr} = 0.25\text{ A}$	t_{rr}	75		ns
Typical junction capacitance	4.0 V, 1 MHz	C_J	15		pF

THERMAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)				
PARAMETER	SYMBOL	BYV26DGP	BYV26EGP	UNIT
Typical thermal resistance	$R_{\theta JA}$ ⁽¹⁾	70		$^\circ\text{C/W}$
	$R_{\theta JL}$ ⁽²⁾	16		

Notes

- (1) Thermal resistance from junction to ambient at 0.375" (9.5 mm) lead length, mounted on P.C.B. with 0.5" x 0.5" (12 mm x 12 mm) copper pads
- (2) Thermal resistance from junction to lead at 0.375" (9.5 mm) lead length with both leads attached to heatsink

ORDERING INFORMATION (Example)				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
BYV26EGP-E3/54	0.428	54	4000	13" diameter paper tape and reel
BYV26EGP-E3/73	0.428	73	2000	Ammo pack packaging
BYV26EGPHE3/54 ⁽¹⁾	0.428	54	4000	13" diameter paper tape and reel
BYV26EGPHE3/73 ⁽¹⁾	0.428	73	2000	Ammo pack packaging

Note

- (1) AEC-Q101 qualified

RATINGS AND CHARACTERISTICS CURVES

($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

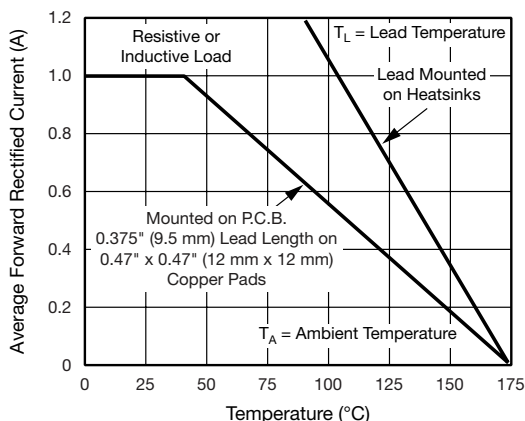


Fig. 1 - Maximum Forward Current Derating Curve

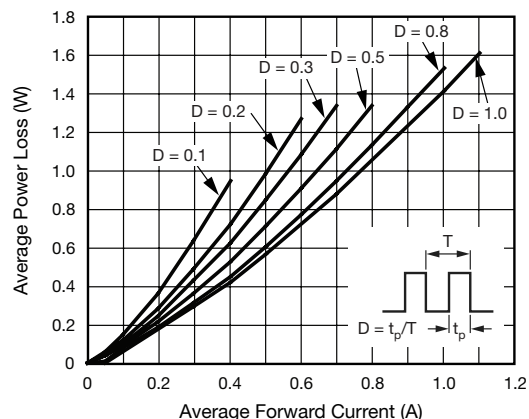


Fig. 2 - Forward Power Loss Characteristics

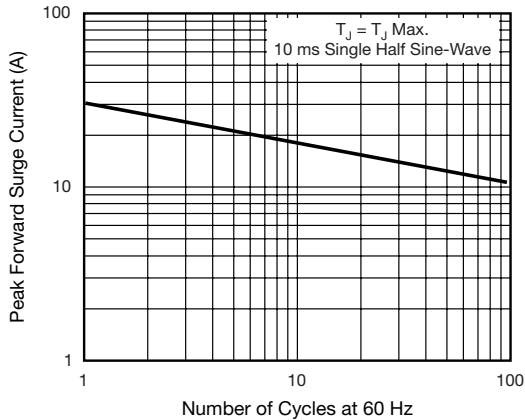


Fig. 3 - Maximum Non-Repetitive Peak Forward Surge Current

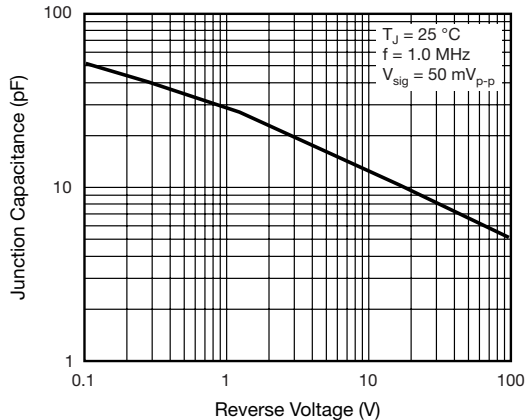


Fig. 6 - Typical Junction Capacitance

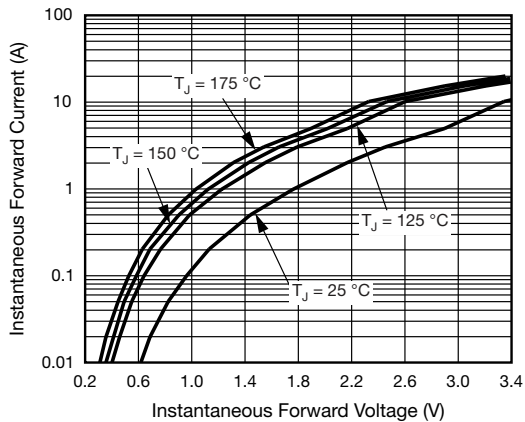


Fig. 4 - Typical Instantaneous Forward Voltage Characteristics

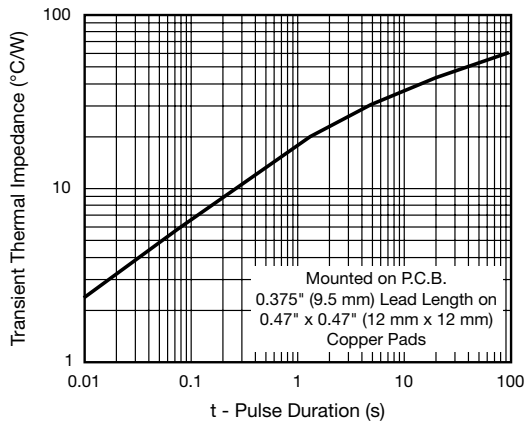


Fig. 7 - Typical Transient Thermal Impedance


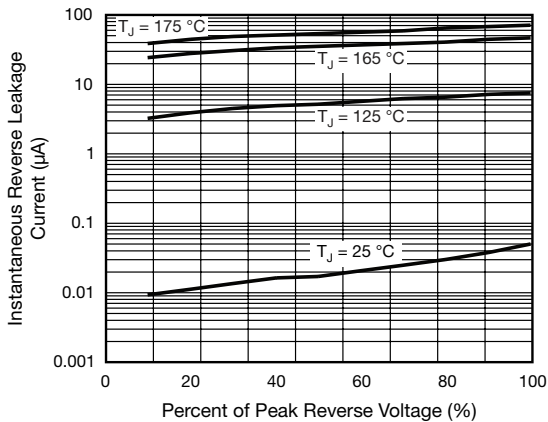


Fig. 5 - Typical Reverse Leakage Characteristics

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

DO-204AC (DO-15)



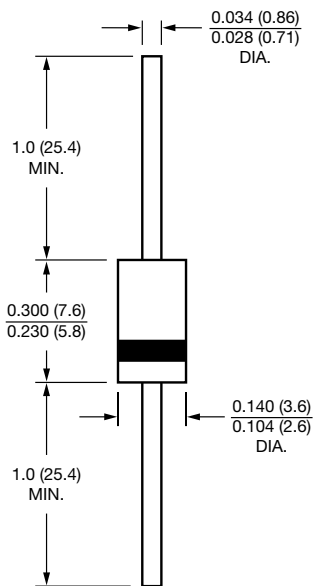

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.