


DPAK REEL

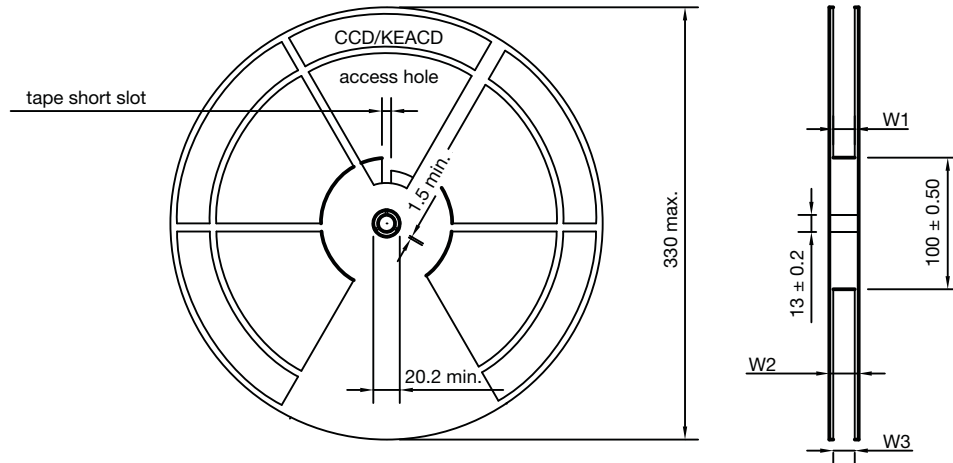

Notes

1. Material: Polystyrene (red).
2. Antistatic cotated.
3. ESD-surface resistivity - 10^5 to 10^{12} Ω /sq.
4. Measure from centerline of sprocket hole to centerline of pocket.
5. Measure from centerline of pocket to centerline of pocket.
6. Pitch tolerance for sprocket hole. 10 pitch cumulative tolerances is ± 0.2 mm.
7. Allowable camber to be 1 mm per 250 mm in length.

TAPE WIDTH mm	T mm	W1 mm	W2 mm	W3 mm	PART NUMBER
16	7 ± 0.50	$16.40 + 0.20/- 0.0$	22.4 max.	15.9 min. 19.4 max.	RL00013
ECN: X10-0299-Rev. A, 23-Aug-10 DWG: 93-5279-X					