


LOK REEL

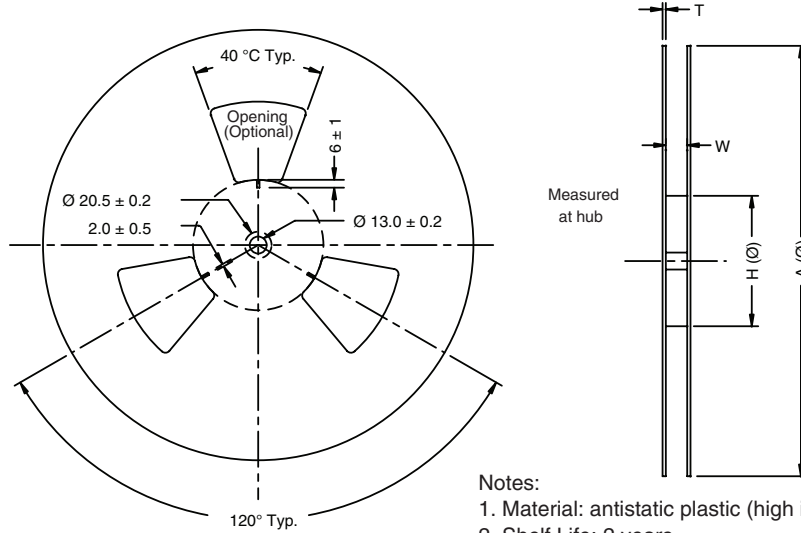

Notes:

1. Material: antistatic plastic (high impact polystyrene)
2. Shelf Life: 2 years
3. Color: any color is acceptable

VER	APPLICATION	A	W	TAPE WIDTH	H	T
- 1	SOIC-14/16 TO-251 (Short Lead) TO-252/TO-252 (Reverse Lead) PLCC-20 TSSOP-8/14/16/20/28 SSOP-24 SOIC-16 (W)	330 ± 2	16.4 +2.0 -0	16	100 ± 1	2.5 ± 0.5
- 2	SOIC-8 (N), SOIC-8 (N) epad MSOP-8/10 PowerPAK® SO-8 PowerPAK 1212 MICRO FOOT® MLP33-5, MLP33-8, MLP33-10 QFN (4 x 4)/(3 x 3)/ DFN-10 (3 x 3)/MLP44 MLP65-18/20L	330 ± 2	12.4 +2.0 -0	12	100 ± 1	2.5 ± 0.5
- 3	SOT-23/143 TSOP-5/6/SC70JW-8L 1206-8 ChipFET® SC70/SC75A/SC89 MICRO FOOT SC-89 (SOT-666) SOT23-5, 6 KGD	178 ± 2	8.4 +1.5 -0	8.4	62 ± 2 or 55 ± 2	1.5 ± 0.5
- 4	SOT-23/143 SC70 MICRO FOOT	330 ± 2	8.4 +1.5 -0	8.4	100 ± 1	2.5 ± 0.5
- 5	SOIC-20W/24W D ² PAK SSOP-28 QSOP-36	330 ± 2	24.4 +2.0 -0	24	100 ± 1	2.5 ± 0.5
- 6	TO-220 (for Kimball, V30114-T1)	330 ± 2	32 +2.0 -0	32	100 ± 1	2.5 ± 0.5
- 7	MICRO FOOT PowerPAK 2 x 5	178 ± 2	12.4 +2.0 -0	12	55 ± 2	1.6 ± 0.25
- 8	KGD	330 ± 2	16.4 +2.0 -0	16	130 ± 1	2.5 ± 0.5

Note

93-5211-7, see page 2 for drawing detail.

ECN: C10-0432-Rev. BH, 31-May-10
DWG: 93-5211-X

LOK REEL (DRAWING DETAIL)

