

Inductors/Transformers Customizable, Surface Mount Torodial, Kool Mu[®], Powdered Iron and MPP Cores


FEATURES

- Toroidal design for minimal EMI radiation in dc-to-dc converter applications
- Designed to support the growing need for efficient dc-to-dc converters in battery operated equipment
- Two separate windings provide versatility by ability to connect windings in series or parallel
- Operating temperature range: - 40 °C to + 125 °C
- Supplied on tape and reel and is designed to be pick and place compatible
- Custom versions and turns ratios available. Contact the factory with your specifications
- Compliant to RoHS directive 2002/95/EC


**RoHS
COMPLIANT**
Note

- Kool Mu[®] is a registered trademark of Spang & Company

STANDARD ELECTRICAL SPECIFICATIONS (in parallel)							
MODEL	STD. IND. (μH)	IND. TOL.	ACTUAL IND. (LOC) (μH)	DCR (Ω)	RATED IDC (40 °C)	IND. AT IDC (L _{BIAS}) (30 %)	
LPT4545ER1R0LK	1.0	± 15 %	0.832	0.003	6.90	0.51 at 7.62	
LPT4545ER1R5LK	1.5	± 15 %	1.30	0.004	6.45	0.80 at 6.10	
LPT4545ER2R5LK	2.5	± 15 %	2.55	0.006	5.75	1.57 at 4.35	
LPT4545ER3R3LK	3.3	± 15 %	3.33	0.007	5.50	2.05 at 3.81	
LPT4545ER5R0LK	5.0	± 15 %	5.20	0.011	4.45	3.20 at 3.05	
LPT4545ER100LK	10	± 15 %	10.2	0.019	3.45	6.28 at 2.18	
LPT4545ER150LK	15	± 15 %	15.0	0.029	2.79	9.26 at 1.79	
LPT4545ER200LK	20	± 15 %	20.8	0.038	2.61	12.4 at 1.53	
LPT4545ER250LK	25	± 15 %	25.2	0.048	2.25	15.5 at 1.39	
LPT4545ER330LK	33	± 15 %	32.5	0.068	1.85	20.0 at 1.22	
LPT4545ER500LK	50	± 15 %	50.0	0.107	1.50	30.8 at 0.98	
LPT4545ER101LK	100	± 15 %	101	0.195	1.15	62.0 at 0.69	
LPT4545ER151LK	150	± 15 %	152	0.302	0.92	93.4 at 0.56	
LPT4545ER251LK	250	± 15 %	248	0.491	0.73	153.0 at 0.44	
LPT4545ER301LK	300	± 15 %	300	0.670	0.63	179.0 at 0.40	
LPT4545ER331LK	330	± 15 %	333	0.706	0.60	205.0 at 0.38	
LPT4545ER1R0LP	1.0	± 15 %	0.838	0.004	6.61	0.53 at 7.09	
LPT4545ER1R5LP	1.5	± 15 %	1.21	0.005	6.08	0.76 at 5.91	
LPT4545ER2R5LP	2.5	± 15 %	2.71	0.009	5.01	1.71 at 3.94	
LPT4545ER3R3LP	3.3	± 15 %	3.35	0.012	4.22	2.11 at 3.54	
LPT4545ER5R0LP	5.0	± 15 %	5.66	0.019	3.32	3.57 at 2.73	
LPT4545ER100LP	10	± 15 %	10.9	0.034	2.52	6.84 at 1.97	
LPT4545ER150LP	15	± 15 %	14.8	0.049	2.10	9.31 at 1.69	
LPT4545ER250LP	25	± 15 %	26.3	0.084	1.61	16.5 at 1.27	
LPT4545ER330LP	33	± 15 %	34.3	0.119	1.34	21.6 at 1.11	
LPT4545ER500LP	50	± 15 %	51.0	0.180	1.09	32.1 at 0.91	
LPT4545ER101LP	100	± 15 %	105	0.342	0.81	66.2 at 0.63	
LPT4545ER151LP	150	± 15 %	150	0.509	0.66	94.7 at 0.53	
LPT4545ER251LP	250	± 15 %	248	0.831	0.52	156.0 at 0.41	
LPT4545ER331LP	330	± 15 %	335	1.194	0.43	211.0 at 0.35	
LPT4545ER1R0LM	1.0	± 15 %	0.838	0.004	7.54	0.54 at 11.11	
LPT4545ER1R5LM	1.5	± 15 %	1.30	0.004	6.82	0.84 at 8.89	
LPT4545ER2R5LM	2.5	± 15 %	2.55	0.007	5.84	1.64 at 6.35	
LPT4545ER3R3LM	3.3	± 15 %	3.33	0.008	5.49	2.14 at 5.56	
LPT4545ER5R0LM	5.0	± 15 %	5.20	0.012	4.37	3.35 at 4.45	
LPT4545ER100LM	10	± 15 %	10.2	0.022	3.32	6.56 at 3.18	
LPT4545ER150LM	15	± 15 %	15.0	0.033	2.69	9.68 at 2.61	
LPT4545ER250LM	25	± 15 %	25.2	0.054	2.12	16.2 at 2.02	
LPT4545ER330LM	33	± 15 %	32.5	0.076	1.76	20.9 at 1.78	
LPT4545ER500LM	50	± 15 %	50.0	0.119	1.41	32.2 at 1.43	
LPT4545ER101LM	100	± 15 %	101	0.219	1.07	64.8 at 1.01	
LPT4545ER151LM	150	± 15 %	152	0.340	0.86	97.7 at 0.82	
LPT4545ER251LM	250	± 15 %	248	0.551	0.67	159.0 at 0.64	
LPT4545ER331LM	330	± 15 %	333	0.788	0.56	214.0 at 0.56	

DESCRIPTION						
LPT	4545	100 μH	± 15 %	A	ER	e2
MODEL	SIZE	INDUCTANCE VALUE	INDUCTANCE TOLERANCE	CORE/HEIGHT	PACKAGE CODE	JEDEC LEAD (Pb)-FREE STANDARD
				K = KOOL MU [®] (A) P = POWDERED IRON (B) M = MPP (C)	ER = Reel EB = Bulk	

GLOBAL PART NUMBER													
L	P	T	4	5	4	5	E	R	1	0	1	L	K
PRODUCT FAMILY			SIZE			PACKAGE CODE		INDUCTANCE VALUE			TOL.	CORE	



Note

- Series is also available with SnPb terminations by using package code RH for tape and reel (in place of ER) or SM for bulk (in place of EB).

LPT-4545


Vishay Dale

Inductors/Transformers Customizable, Surface Mount
Torodial, Kool Mu[®], Powdered Iron and MPP Cores

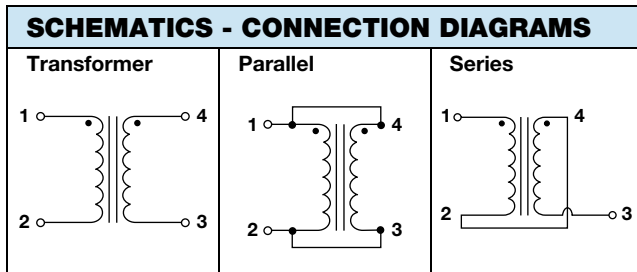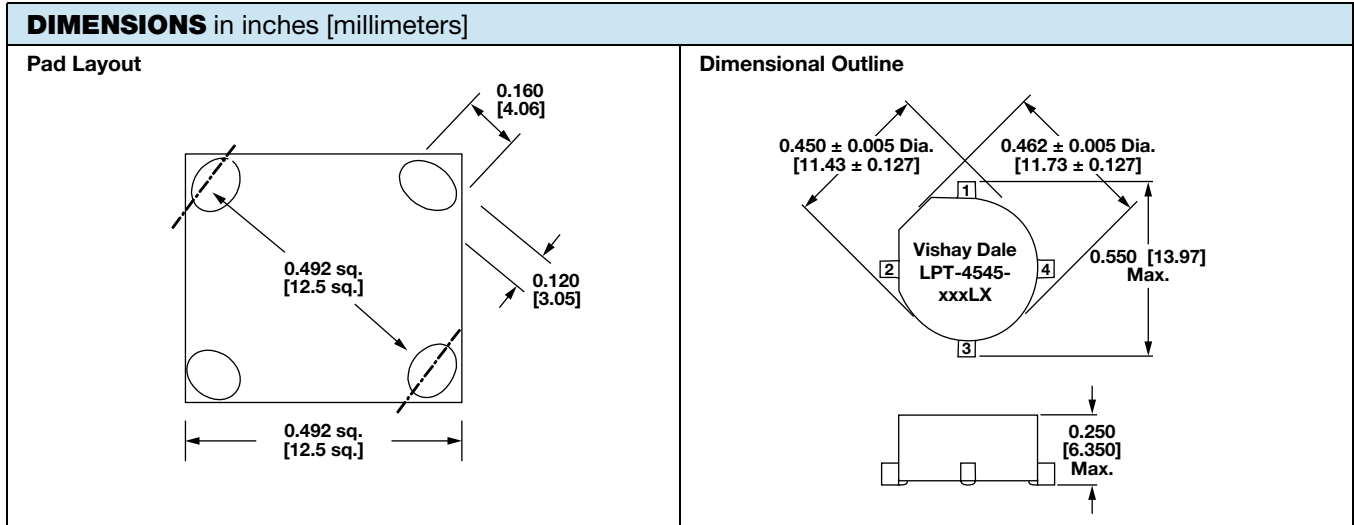

PART MARKING

- Vishay Dale
- Model number
- Pin 1 identification

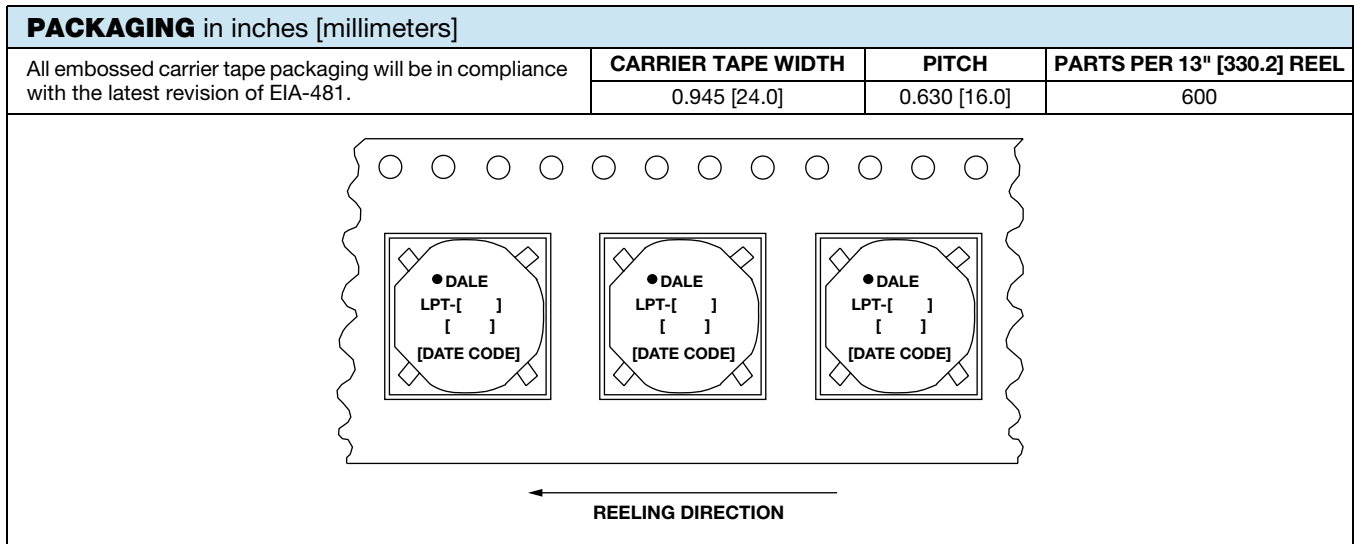



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.