


Printed Circuit Test Point Connector

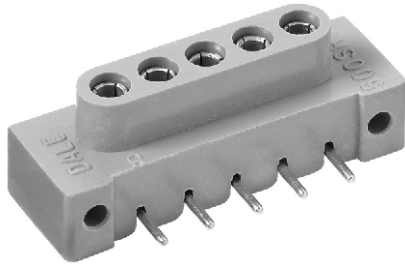

APPLICATIONS

Permanent or semi-permanent test points for checkout and testing of printed circuits.

ELECTRICAL SPECIFICATIONS

Current Rating: 5 A

Breakdown Voltage:

At sea level: 3000 V_{RMS}

At 70 000 feet: 676 V_{RMS}

FEATURES

- Dip-solder type for permanent mounting
- One-piece molding
- Floating contacts
- Meets applicable paragraphs of MIL-C-8384

MATERIAL SPECIFICATIONS

Contact Socket: Phosphor bronze

Contact Plating: Gold

Standard Body: Glass-filled diallyl phthalate per MIL-P-19833, type GDI-30F, green. Other materials available upon request


PHYSICAL SPECIFICATIONS

Number of Contacts: 5

Contact Spacing: 0.150"

Contact: Accepts 0.080" diameter probe

DIMENSIONS in inches (millimeters)

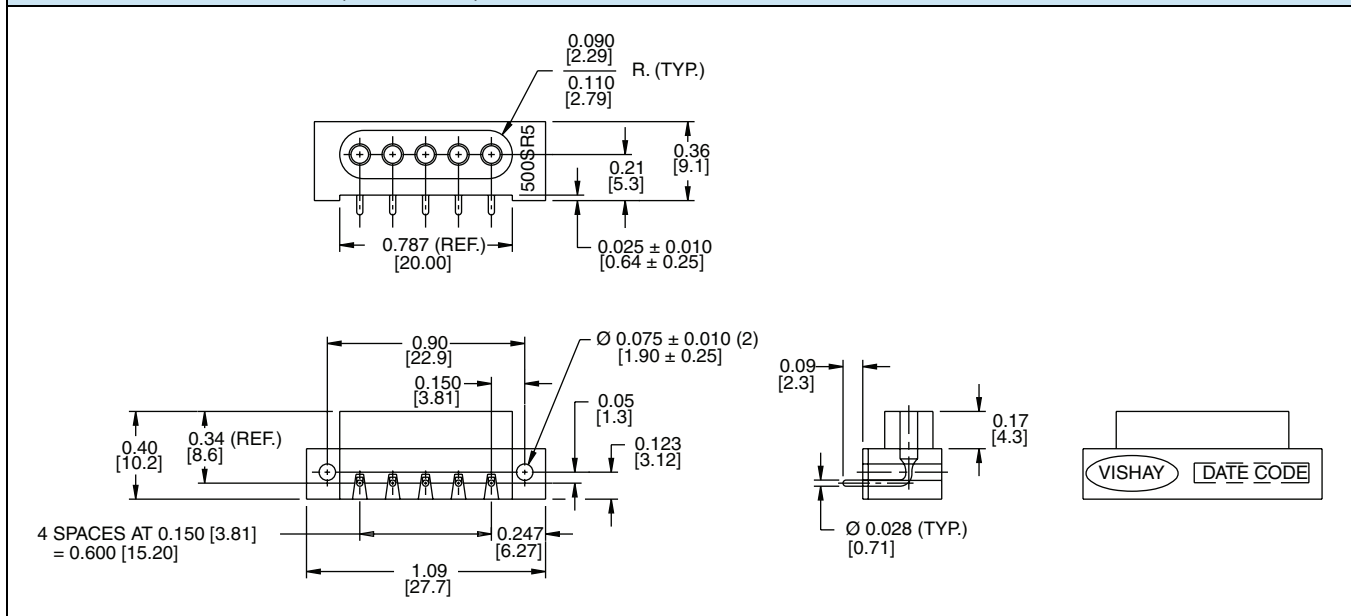

ORDERING INFORMATION

500	SR	-5
MODEL	CONTACTS	NUMBER OF CONTACTS
	SR = Socket	



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.