





WET TANTALUM CAPACITOR CHARACTERISTICS					
MODEL	MIL SPEC/ TYPE	OUTLINE DRAWING	CAPACITANCE RANGE (μ F)	WORKING VOLTAGES at 85 °C	PAGE
Military Parts-Polar CLR65 CLR69	M39006/09		1.7 - 1200 6.8 - 2200	6 - 125 VDC 6 - 125 VDC	58
CLR79 CLR81 CLR90 CLR91	M39006/22 M39006/25 M39006/30 M39006/31		1.7 - 1200 6.8 - 2200	6 - 125 VDC 6 - 125 VDC	58
109D-Wet, Polar	MIL-DTL-3965 (CL64/65)		1.7 - 2200	6 - 125 VDC	12
769D-Wet, Polar	CECC 30202-013		3.6 - 2200	6 - 125 VDC	29
135D-Wet, Polar	M39006/22/25 CLR79/81 CLR90/91		1.7 - 2200	6 - 125 VDC	42
735D-Wet, Polar CT79 735DE	CECC 30202-001 CECC 30202-005 CECC 30202-801		2.7 - 2200 3.9 - 2200 3.6 - 2200	6 - 125 VDC	47
138D-Wet, Polar	M39006/09/21 (CLR65/69)		1.7 - 2200	6 - 125 VDC	17
738D-Wet, Polar CT9	CECC-30202-004		3.3 - 1200 3.9 - 2200	6 - 125 VDC 6 - 125 VDC	24
ST	DSCC 93026		10 - 1800	25 - 125 VDC	80
STA			150 - 4700	6 - 15 VDC	83
STE			750 - 10 000	10 - 125 VDC	85
134D			10 - 680	50 - 125 VDC	87
MTP/MTPH			3.3 - 470	6 - 60 VDC	36/38

Parameter Comparison Guide

Vishay

Wet Tantalum Capacitors

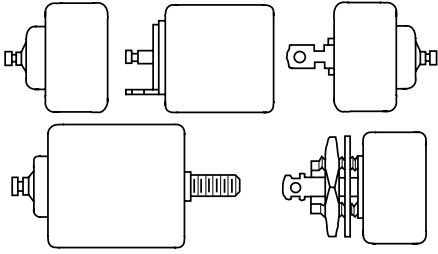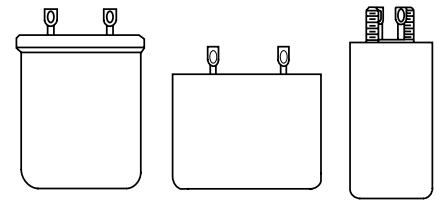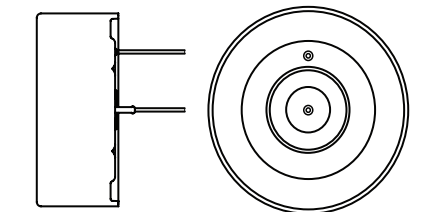

WET TANTALUM CAPACITOR CHARACTERISTICS					
MODEL	MIL SPEC/ TYPE	OUTLINE DRAWING	CAPACITANCE RANGE (μF)	WORKING VOLTAGES at 85 °C	PAGE
XTH-K-M-L-V	M39006/18/19/20 (CLR10, 14, 17)		2 - 2200 2 - 1300	8 - 630 VDC 8 - 630 VDC	90
200D-Wet, Polar 202D-Wet, Polar	MIL-DTL-3965/21 (CL55)		70 - 1500	15 - 150 VDC 15 - 150 VDC	104
285D			1 - 410	6 - 300 VDC	114
HE3			3300 - 72 000	25 - 125 VDC	100