



Performance Characteristics Tantalum Capacitors

CAPACITOR ELECTRICAL PERFORMANCE CHARACTERISTICS				
ITEM	PERFORMANCE CHARACTERISTICS			
Category Temperature Range	- 55 °C to + 85 °C (to + 125 °C with voltage derating)			
Capacitance Tolerance	± 20 %, ± 10 % (at 120 Hz) 2 V _{rms} (max.) at + 25 °C using a capacitance bridge			
Dissipation Factor	Limit per Standard Ratings Table. Tested via bridge method, at 25 °C, 120 Hz			
ESR	Limit per Standard Ratings Table. Tested via bridge method, at 25 °C, 100 kHz			
Leakage Current	After application of rated voltage applied to capacitors for 5 minutes using a steady source of power with 1 kΩ resistor in series with the capacitor under test, leakage current at 25 °C is not more than 0.01 CV or 0.5 μA, whichever is greater. <i>Note that the leakage current varies with temperature and applied voltage. See graph below for the appropriate adjustment factor.</i>			
Capacitance Change by Temperature	+ 12 % max. (at + 125 °C) + 10 % max. (at + 85 °C) - 10 % max. (at - 55 °C)	For capacitance value > 300 μF + 20 % max. (at + 125 °C) + 15 % max. (at + 85 °C) - 15 % max. (at - 55 °C)		
Reverse Voltage	Capacitors are capable of withstanding peak voltages in the reverse direction equal to: 10 % of the DC rating at + 25 °C 5 % of the DC rating at + 85 °C Vishay does not recommend intentional or repetitive application of reverse voltage			
Temperature Derating	If capacitors are to be used at temperatures above + 25 °C, the permissible rms ripple current or voltage shall be calculated using the derating factors: 1.0 at + 25 °C 0.9 at + 85 °C 0.4 at + 125 °C			
Operating Temperature	+ 85 °C RATING		+ 125 °C RATING	
	WORKING VOLTAGE (V)	SURGE VOLTAGE (V)	WORKING VOLTAGE (V)	SURGE VOLTAGE (V)
	4	5.2	2.7	3.4
	6.3	8	4	5
	10	13	7	8
	16	20	10	12
	20	26	13	16
	25	32	17	20
	35	46	23	28
	50	65	33	40
	50 ⁽¹⁾	60	33	40
	63	76	42	50

Note

⁽¹⁾ Capacitance values 15 μF and higher


Performance Characteristics

Vishay Sprague

Performance Characteristics Tantalum Capacitors



TYPICAL LEAKAGE CURRENT FACTOR RANGE

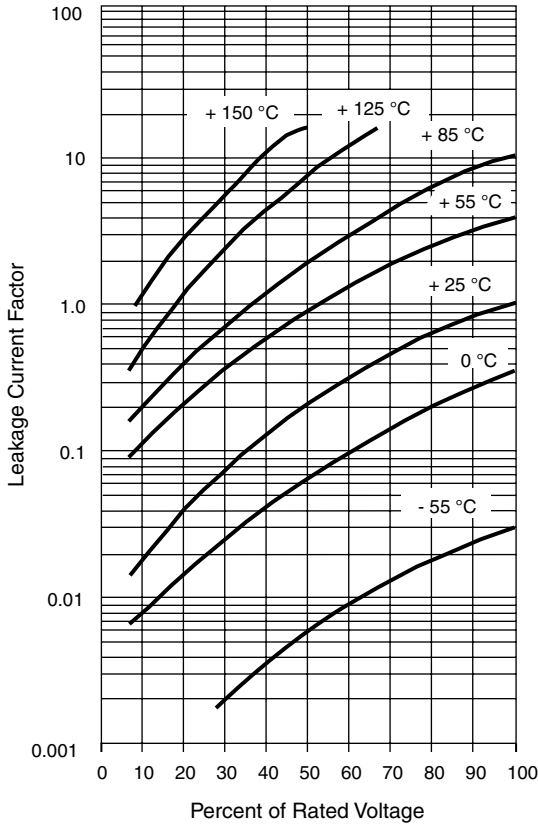

Notes:

At + 25 °C, the leakage current shall not exceed the value listed in the Standard Ratings Table.

At + 85 °C, the leakage current shall not exceed 10 times the value listed in the Standard Ratings Table.

At + 125 °C, the leakage current shall not exceed 12 times the value listed in the Standard Ratings Table.

CAPACITOR PERFORMANCE CHARACTERISTICS

ITEM	PERFORMANCE CHARACTERISTICS
Surge Voltage	Post application of surge voltage (rated voltage) in series with a 33 Ω resistor at the rate of 30 s ON, 30 s OFF, for 1000 successive test cycles at 85 °C, capacitors meet the characteristics requirements listed below. Capacitance Change Within ± 10 % of initial value Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less
Surge Current	After subjecting parts in series with a 1 Ω resistor at the rate of 3 s CHARGE, 3 s DISCHARGE, and a cap bank of 100K μF for 3 successive test cycles at 25 °C, capacitors meet the characteristics requirements listed below. Capacitance Change Within ± 10 % of initial value Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less
Life Test at + 85 °C	Capacitors meet the characteristic requirements listed below. After 2000 h application of rated voltage at 85 °C. Capacitance Change Within ± 10 % of initial value Leakage Current Shall not exceed 125 % of Initial Value
Life Test at + 125 °C	Capacitors meet the characteristic requirements listed below. After 1000 h application ² / ₃ of rated voltage at 125 °C. Capacitance Change Within ± 10 % of initial value Leakage Current Shall not exceed 125 % of Initial Value



CAPACITOR ENVIRONMENTAL CHARACTERISTICS		
ITEM	CONDITION	ENVIRONMENTAL CHARACTERISTICS
Humidity Tests	At 40 °C/90 % RH 1000 h, no voltage applied.	Capacitance Change Within ± 10 % of initial value Dissipation Factor Not to exceed 150 % of initial + 25 °C requirement Leakage Current Initial specified value or less
Temperature Cycles	At - 55 °C/+ 125 °C, 30 min each, for 5 cycles.	Capacitance Change Within ± 10 % of initial value Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less
Moisture Resistance	Mil-Std-202, Method 106 at rated voltage, 42 cycles.	Capacitance Change Within ± 10 % of initial value Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less
Thermal Shock	Capacitors are subjected to 5 cycles of the following: - 55 °C (+ 0 °C, - 5 °C) for 30 min then + 25 °C (+ 10 °C, - 5 °C) for 5 min, then + 125 °C (+ 3 °C, - 0 °C) for 30 min, then + 25 °C (+ 10 °C, - 5 °C) for 5 min	Capacitance Change Within ± 10 % of initial value Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less

MECHANICAL PERFORMANCE CHARACTERISTICS		
TEST CONDITION	CONDITION	POST TEST PERFORMANCE
Shear Test	Apply a pressure load of 5 N for 10 ± 1 s horizontally to the center of capacitor side body.	Capacitance Change Within ± 10 % of initial value Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less There shall be no mechanical or visual damage to capacitors post-conditioning.
Substrate Bend	With parts soldered onto substrate test board, apply force to the test board for a deflection of 3 mm, for a total of 3 bends at a rate of 1 mm/second.	Capacitance Change Within ± 10 % of initial value Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less
Vibration	Mil-Std-202, Method 204, Condition D, 10 Hz to 2000 Hz, 20 G Peak	Capacitance Change Within ± 10 % of initial value Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less There shall be no mechanical or visual damage to capacitors post-conditioning.
Shock	Mil-Std-202, Method 204, Condition I, 100 g Peak	Capacitance Change Within ± 10 % of initial value Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less There shall be no mechanical or visual damage to capacitors post-conditioning.
Resistance to Solder Heat	<ul style="list-style-type: none"> Recommended reflow profiles temperatures and durations are located within the Capacitor Series Guides. Pb-free and Lead-Bearing Series Caps are backward and forward compatible. 	Capacitance Change Within ± 10 % of initial value Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less There shall be no mechanical or visual damage to capacitors post-conditioning.
Solderability	Mil-Std-2002, Method 208, ANSI/J-Std-002, Test B. Applies only to Solder and tin plated terminations. Does not apply to gold terminations.	Capacitance Change Within ± 10 % of initial value Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less There shall be no mechanical or visual damage to capacitors post-conditioning.
Resistance to Solvents	Mil-Std-202, Method 215	Capacitance Change Within ± 10 % of initial value Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less There shall be no mechanical or visual damage to capacitors post-conditioning.
Flammability	Encapsulant materials meet UL 94 V0 with an oxygen index of 32 %.	