


PowerPAIR 6 x 3.7 CARRIER TAPE

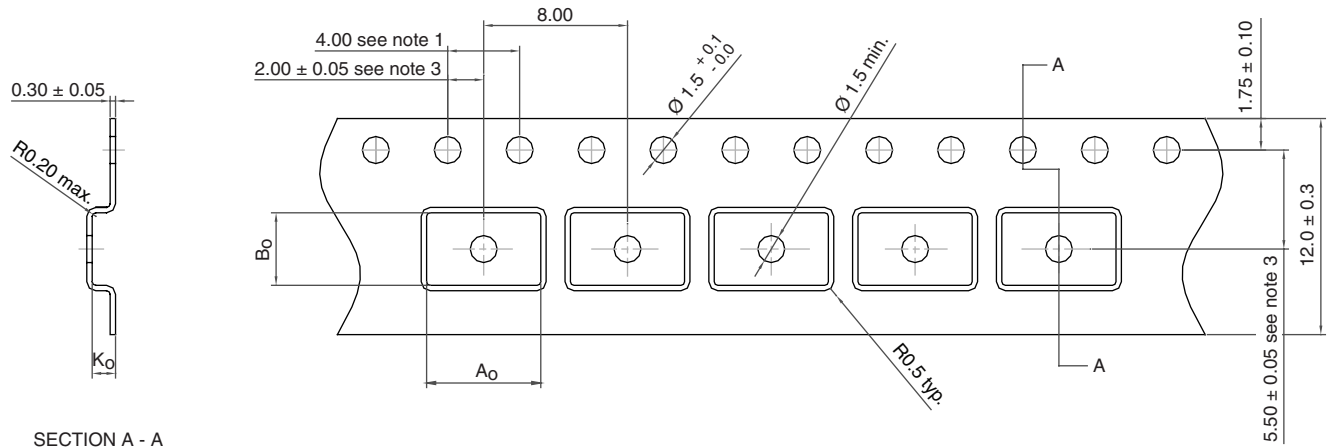

SECTION A - A

$$A_0 = 6.35$$

$$B_0 = 4.03$$

$$K_0 = 1.30$$

Notes

1. 10 sprocket hole pitch cumulative tolerance ± 0.2 mm.
2. Camber not to exceed 1 mm in 100 mm.
3. Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole.
4. Material: PS and C.
5. Tolerance will be ± 0.1 mm unless specified.

ECN: C09-0425-Rev. B, 22-Jun-09
 DWG: 93-5264-X