

Rotative Transducer Elements in Hall Effect Technology



FEATURES

- Accurate linearity down to: $\pm 0.5\%$
- All electrical angles available up to: 360° (no dead band)
- Extremely long life: Greater than 100M cycles
- Non contacting technology: Hall effect
- Model dedicated to all applications in harsh environments
- Very reduced dimensions, fitting in small volumes
- Delivered as a kit; 2 elements: Track and wiper



RoHS
COMPLIANT

ELECTRICAL SPECIFICATIONS		
PARAMETER	STANDARD	SPECIAL
Electrical Angle	$90^\circ, 180^\circ, 270^\circ, 360^\circ$	Any other angle upon request
Linearity	$\pm 1\%$	$\pm 0.5\%$
Supply Voltage	$5 V_{DC} \pm 10\%$	Other upon request
Supply Current	10 mA typ./16 mA max.	16 mA for PWM output
Output Signal	Analog ratiometric 10 % to 90 % of V_{supply} or PWM 1kHz, 10 % to 90 % duty cycle	Other upon request
Over Voltage Protection		+ 20 V_{DC}
Reverse Voltage Protection		- 10 V_{DC}
Load Resistance Recommended		Min. 1 k Ω for analog output and PWM output
Hysteresis Static		0.2° max.

MECHANICAL SPECIFICATIONS	
PARAMETER	
Mechanical travel	360° continuous
2 elements	Track with electronic PCs/Wiper with magnet
Standard	IP 66; Fully sealed product



ORDERING INFORMATION/DESCRIPTION								
RMHE	1	A	1	W	A	XXXX	BO 10	e1
MODEL	NUMBER OF TRACKS	LINEARITY	ELECTRICAL ANGLE	OUTPUT TYPE	OUTPUT SIGNAL	SPECIAL REQUEST	PACKAGING	LEAD FINISH
	1: 1 cup (1 signal) 2: 2 cups (redundant)	A: $\pm 1\%$ B: $\pm 0.5\%$	1: 90° 2: 180° 3: 270° 4: 360° 9: Other angles	W: Wires Z: Custom	A: Analog CW B: Analog CCW C: PWM CW D: PWM CCW Z: Other output		Box of 10 pieces	

SAP PART NUMBERING GUIDELINES						
RMHE	2	B	9	Z	C	XXXX
MODEL	NUMBER OF TRACKS	LINEARITY	ELECTRICAL ANGLE	OUTPUT TYPE	OUTPUT SIGNAL	SPECIAL REQUEST
	Redundant signals					




V_{OUT} ANALOG


Operating Temperature	85 °C	125 °C
Diagnostic High Level	96 % min.	96 % min.
Diagnostic Low Level	2 % max.	4 % max.

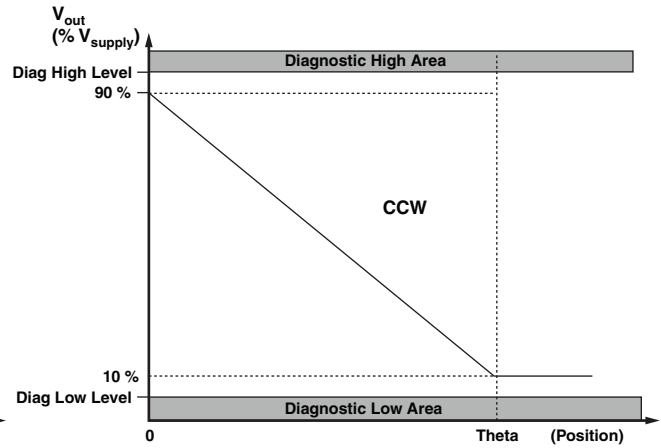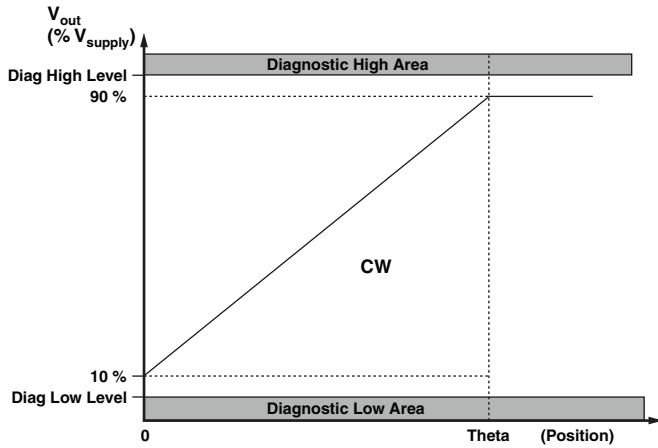

V_{OUT} PWM

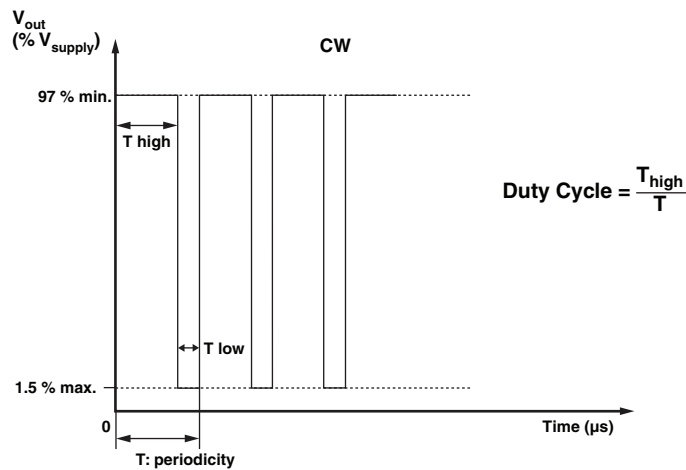


DIAGNOSTIC MODES			
FAILURE	V_{out} Analog $R_{pull-up}$	V_{out} Analog $R_{pull-down}$	V_{out} PWM $R_{pull-up} = 1\text{ k}\Omega$ $V_{pull-up} = V_{supply} = 5\text{ V}$
1: Broken GND	Diagnostic high area	Diagnostic low area	> 97 % V_{supply} without modulation
2: Broken V_{out}	Diagnostic high area	Diagnostic low area	> 97 % V_{supply} without modulation
3: Broken V_{supply}	Diagnostic high area	Diagnostic low area	> 97 % V_{supply} without modulation
Over Voltage $V_{supply} > 7\text{ V}$	Diagnostic high area	Diagnostic low area	> 97 % V_{supply} without modulation
Under Voltage $V_{supply} < 2.7\text{ V}$	Diagnostic high area	Diagnostic low area	> 97 % V_{supply} without modulation

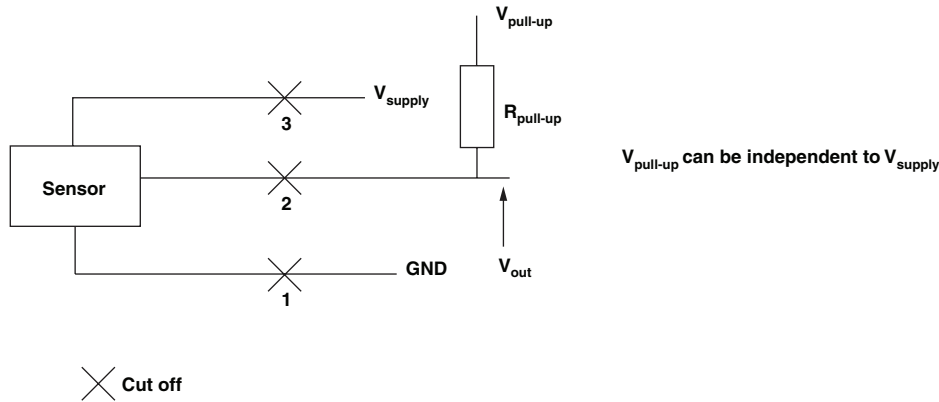

ENVIRONMENTAL SPECIFICATIONS	
Vibrations	20 G from 10 Hz to 2000 Hz, EN 60068-2-6
Shocks	3 shocks/axis; 50 G half a sine 11 ms, EN 60068-2-7
Operating Temperature Range	- 40 °C; + 150 °C
Life	> 100M of cycles
Rotational Speed (max.)	120 rpm
Immunity to Radiated Electromagnetic Disturbances	200 V/m 150 kHz/1 GHz, IEC 62132-2 Part 2 (Level A)
Immunity to Power Frequency Magnetic Field	200 A/m 50 Hz/60 Hz, EN 61000-4-8 (Level A)
Radiated Electromagnetic Emissions	30 MHz/1 GHz < 30 dBμV/m, EN 61000-6-4 (Level A)
Electrostatic Discharges	Contact discharges: ± 4 kV Air discharges: ± 8 kV, EN 61000-4-2
Materials	
Housing	Aluminum
Mounting Type	Servo
Shaft (Standard: ACAPT W02564)	Separated element including a magnet
Output	3 lead wires (AWG22) Length 250 mm ± 10 mm



DIMENSIONS in millimeters

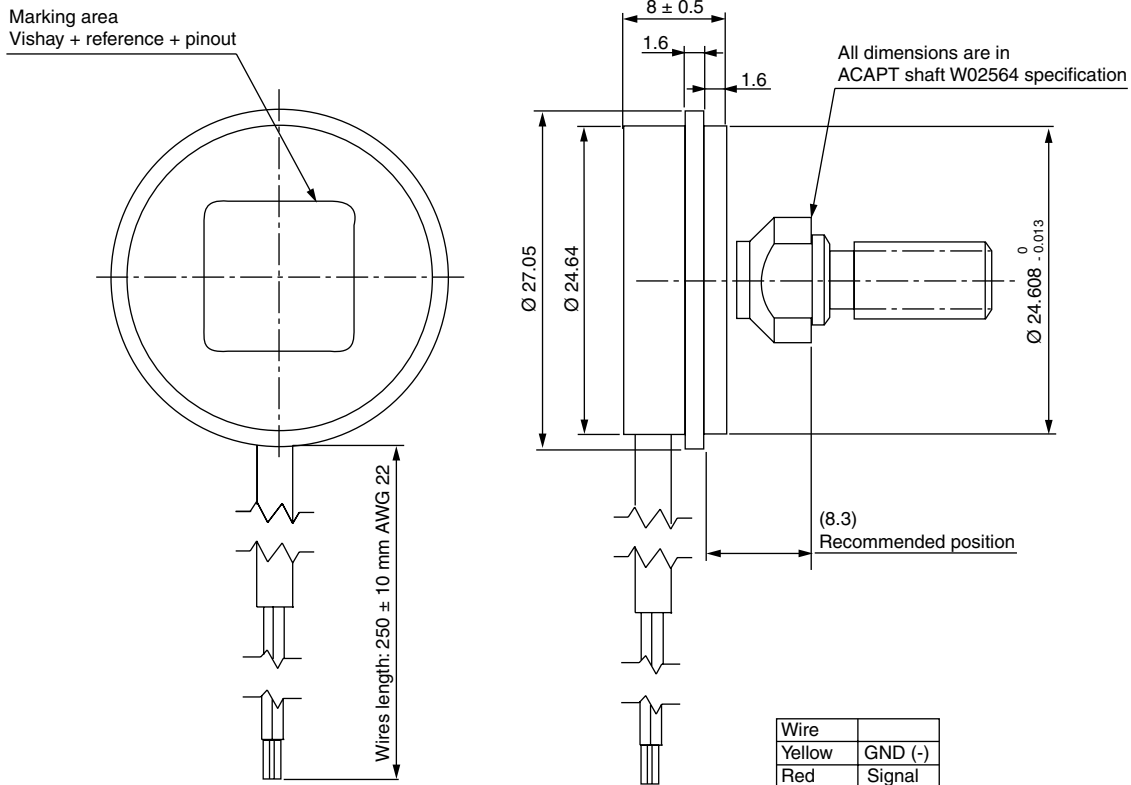

General tolerances ± 0.5 mm

Wire	
Yellow	GND (-)
Red	Signal
Green	Vcc (+)

ACAPT Shaft W02564

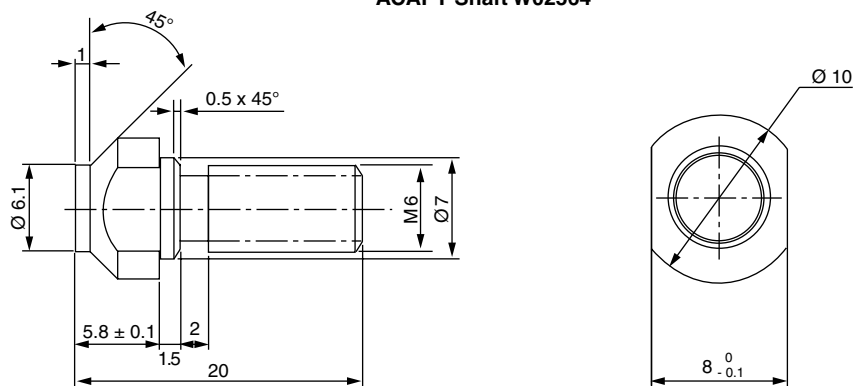

General tolerances ± 0.5 mm



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.