


## SC-89-L (SOT-666) CARRIER TAPE

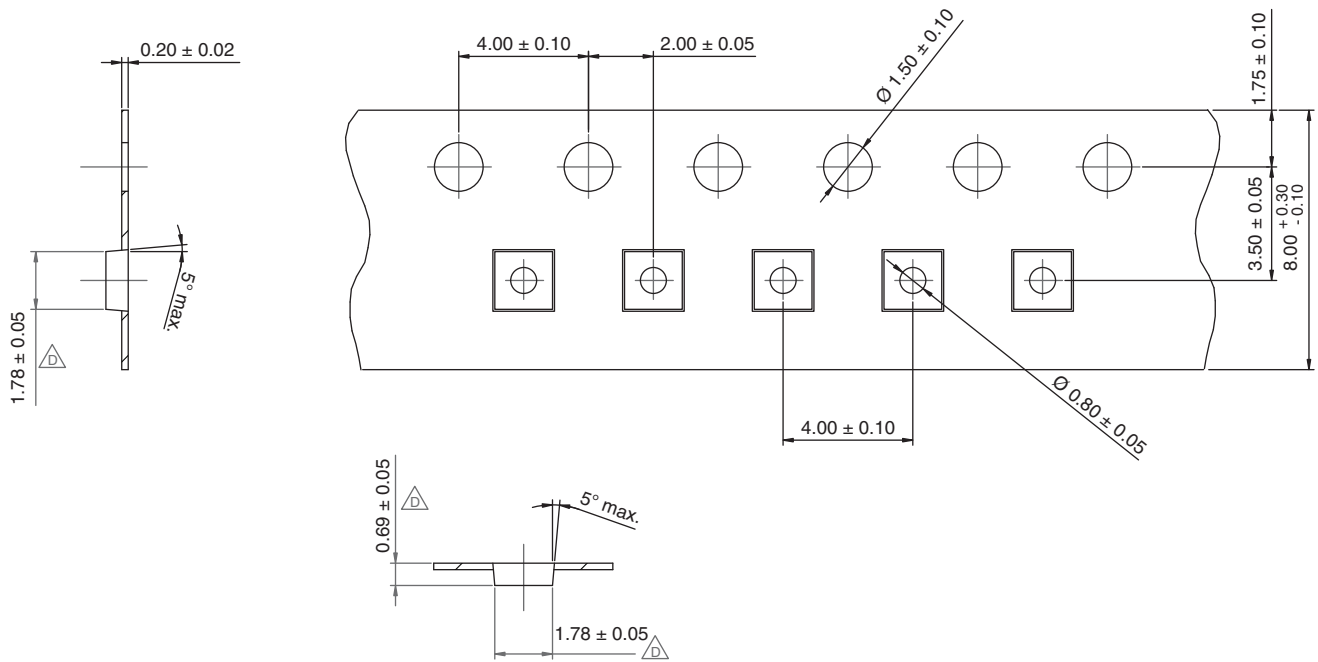

### Notes

1. 10 sprocket hole pitch cumulative tolerance  $\pm 0.2$  mm.
2. Camber not to exceed 1 mm in 100 mm, also not to exceed 1.5 cm in 1 m actually.
3. Pocket position relative to sprocket hole measured.
4. Material: PS and C.
5. All dimension in millimeter unless specified.
6. Vishay part number must be labeled at all reels of carrier tape.
7. Surface resistivity -  $10^5$  max.  $\Omega/\text{sq}$ .

| QUANTITY PER REEL                                 |
|---|
| 3000  |
| ECN: C10-0941-Rev. E, 27-Sep-10<br>DWG: 93-5232-X |