


Printed Circuit Dip Solder Connector

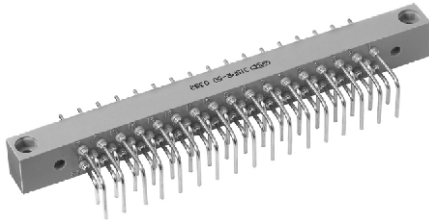

MATERIAL SPECIFICATIONS

Contact Pin: Dip solder phosphor bronze

Contact Pin-Solder Cup: Brass

Contact Socket: Phosphor bronze (closed entry)

Contact Plating: Gold

Guides: Stainless steel, passivated

Nut: Aluminum, anodized

Standard Body: Glass-filled diallyl phthalate per MIL-P-19833, type GDI-30F, green. Other materials available upon request

PHYSICAL SPECIFICATIONS

Number of Contacts: 50

Contact Spacing: 0.200", staggered rows provide a 0.100" grid

Contact Gauge: #20 AWG

Minimum Creepage Path between Contacts: 0.11"

Minimum Air Space between Contacts: 0.06"

FEATURES

- Polarization guide components are interchangeable between plug and receptacle. Each may be orientated in any of 6 positions to provide selective keying. A total of 144 keying variations are possible.
- Right angle dip solder terminals, straight through available on request
- Holes provided for threaded mounting studs
- Female contacts float to aid in alignment and resist vibration
- Closed entry female contacts prevent insertion of oversize probes
- Meets applicable paragraphs of MIL-C-8384

APPLICATIONS

Designed for printed circuit applications requiring 50 contacts.

ELECTRICAL SPECIFICATIONS


Current Rating: 7.5 A

Breakdown Voltage:

At sea level: 2500 V_{RMS}

At 70 000 feet: 600 V_{RMS}

DIMENSIONS in inches (millimeters)

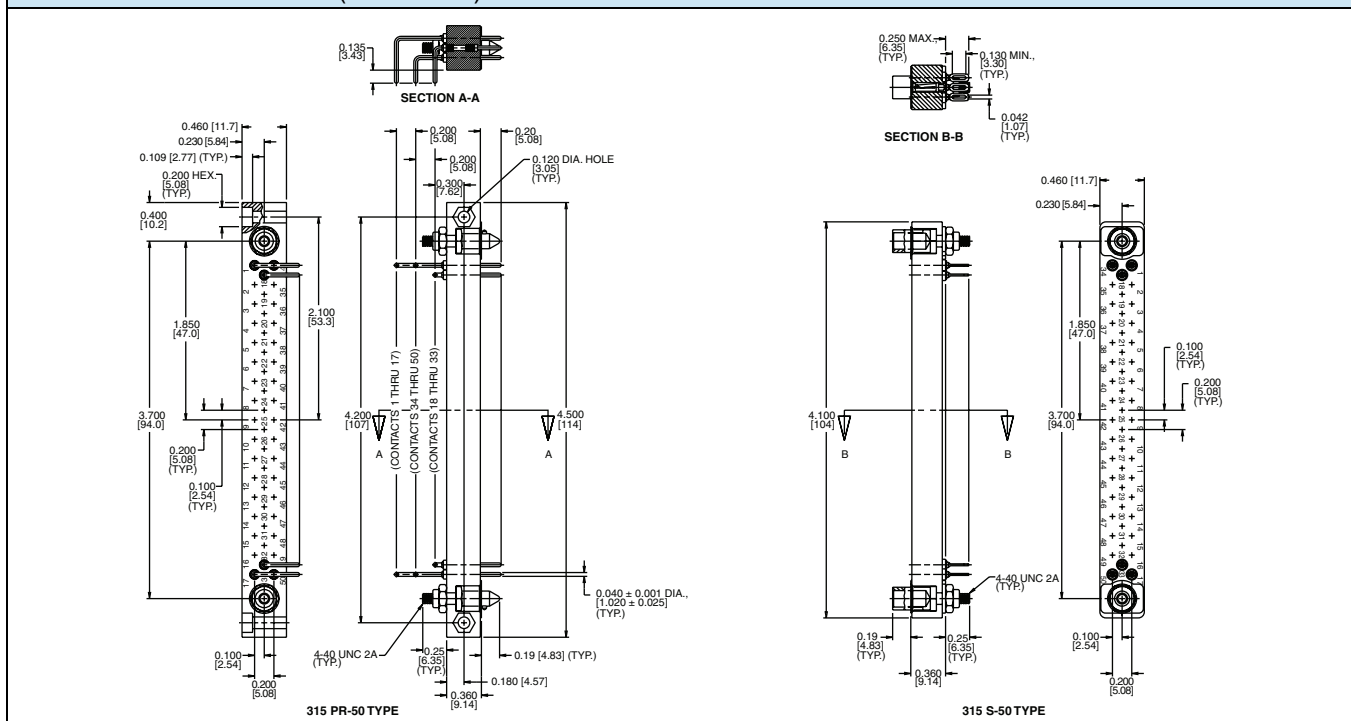

Series 315

Vishay Dale

Printed Circuit Dip Solder Connector



ORDERING INFORMATION

315 MODEL	PR CONTACTS	-50 NUMBER OF CONTACTS
	PR = Pin with right angle dip solder terminals S = Socket	



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.