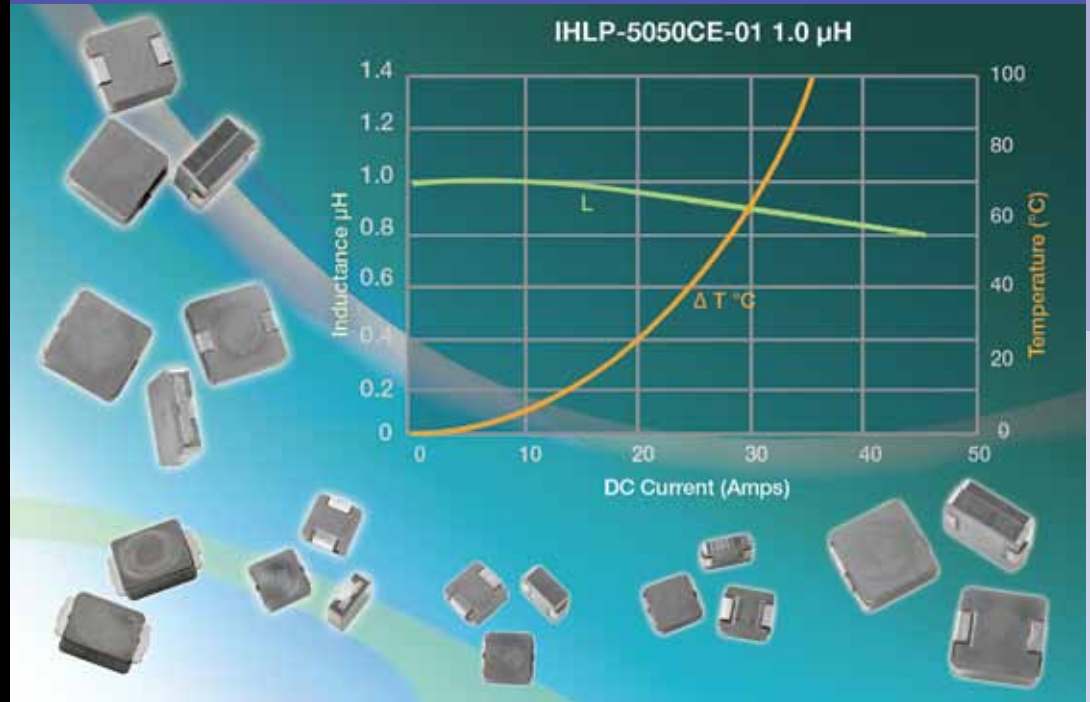




SURFACE-MOUNT POWER INDUCTORS

For Commercial Applications



IHLP-1212BZ-11
 IHLP-1616AB-01
 IHLP-1616AB-11
 IHLP-1616BZ-01
 IHLP-1616BZ-11
 IHLP-2020AB-01
 IHLP-2020AB-11
 IHLP-2020BZ-01
 IHLP-2020BZ-11
 IHLP-2020CZ-01
 IHLP-2020CZ-11
 IHLP-2525AH-01
 IHLP-2525BD-01
 IHLP-2525CZ-01
 IHLP-2525CZ-11
 IHLP-2525CZ-06
 IHLP-2525CZ-07

IHLP-2525EZ-01
 IHLM-2525CZ-01
 IHLM-2525CZ-06
 IHLM-2525CZ-07
 IHLP-4040DZ-01
 IHLP-4040DZ-11
 IHLP-5050CE-01
 IHLP-5050CE-06
 IHLP-5050CE-07
 IHLP-5050EZ-01
 IHLP-5050FD-01
 IHLP-6767DZ-01
 IHLP-6767DZ-11
 IHLP-6767GZ-01
 IHLP-6767GZ-11
 IHLW-4040CF-11
 IHLW-5050CE-01



SURFACE-MOUNT POWER INDUCTORS












For Commercial Applications

Features

- Shielded construction
- Frequency range up to 5.0 MHz
- Lowest DCR/ μ H
- Handles high transient current spikes without saturation
- Ultra-low buzz noise, due to composite construction
- 100 % lead (Pb)-free

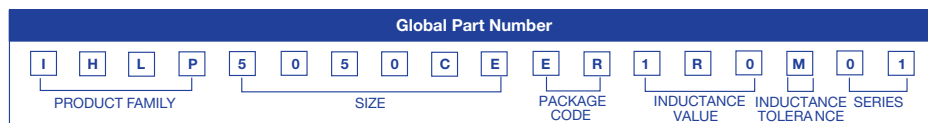


RoHS
COMPLIANT

Model	Inductance Range**	DCR Max	Rated Current*	Dimensions in Inches [mm]
IHLP-1212BZ-11 	0.22 μ H to 1.5 μ H	11.4 m Ω to 32.0 m Ω	5 A to 6.5 A	L = 0.142 [3.6] max W = 0.118 \pm 0.008 [3.0 \pm 0.2] H = 0.079 [2.0] max
IHLP-1616AB-01 	0.047 μ H to 1.0 μ H	3.75 m Ω to 52.5 m Ω	4 A to 13 A	L = 0.175 \pm 0.010 [4.45 \pm 0.254] W = 0.160 \pm 0.010 [4.06 \pm 0.254] H = 0.047 [1.20] max
IHLP-1616AB-11 	0.047 μ H to 2.2 μ H	3.3 m Ω to 100 m Ω	2.75 A to 15 A	L = 0.175 \pm 0.010 [4.45 \pm 0.254] W = 0.160 \pm 0.010 [4.06 \pm 0.254] H = 0.047 [1.20] max
IHLP-1616BZ-01 	0.1 μ H to 2.2 μ H	5.0 m Ω to 90 m Ω	2.85 A to 11 A	L = 0.175 \pm 0.010 [4.45 \pm 0.254] W = 0.160 \pm 0.010 [4.06 \pm 0.254] H = 0.079 [2.0] max
IHLP-1616BZ-11 	0.01 μ H to 4.7 μ H	4.5 m Ω to 105 m Ω	1.7 A to 12 A	L = 0.175 \pm 0.010 [4.45 \pm 0.254] W = 0.160 \pm 0.010 [4.06 \pm 0.254] H = 0.079 [2.0] max
IHLP-2020AB-01 	0.1 μ H to 4.7 μ H	4.6 m Ω to 168 m Ω	2.2 A to 13.5 A	L = 0.216 \pm 0.010 [5.49 \pm 0.254] W = 0.204 \pm 0.010 [5.18 \pm 0.254] H = 0.047 [1.2] max
IHLP-2020AB-11 	0.1 μ H to 4.7 μ H	4.2 m Ω to 131 m Ω	2.5 A to 14 A	L = 0.216 \pm 0.010 [5.49 \pm 0.254] W = 0.204 \pm 0.010 [5.18 \pm 0.254] H = 0.047 [1.2] max
IHLP-2020BZ-01 	0.1 μ H to 10 μ H	3.9 m Ω to 199 m Ω	2.3 A to 17 A	L = 0.216 \pm 0.010 [5.49 \pm 0.254] W = 0.204 \pm 0.010 [5.18 \pm 0.254] H = 0.078 [2.0] max
IHLP-2020BZ-11 	0.1 μ H to 10 μ H	2.9 m Ω to 182.8 m Ω	2.2 A to 21 A	L = 0.216 \pm 0.010 [5.49 \pm 0.254] W = 0.204 \pm 0.010 [5.18 \pm 0.254] H = 0.078 [2.0] max
IHLP-2020CZ-01 	0.1 μ H to 15 μ H	3.16 m Ω to 265 m Ω	1.9 A to 23 A	L = 0.216 \pm 0.010 [5.49 \pm 0.254] W = 0.204 \pm 0.010 [5.18 \pm 0.254] H = 0.118 [3.0] max
IHLP-2020CZ-11 	0.1 μ H to 22 μ H	2.9 m Ω to 260 m Ω	1.9 A to 21 A	L = 0.216 \pm 0.010 [5.49 \pm 0.254] W = 0.204 \pm 0.010 [5.18 \pm 0.254] H = 0.118 [3.0] max

* DC current (A) that will cause an approximate ΔT of 40 °C.

** Other values available upon request.













SURFACE-MOUNT POWER INDUCTORS

For Commercial Applications



Applications

- Low-profile, high-current power supplies
- DC/DC converters
- Battery-powered devices with low height requirements, 1.8 mm to 3.0 mm
- PDAs, notebooks, desktop PCs, and servers
- High-current POL converters
- DC/DC converters in distributed power systems
- DC/DC converters for field programmable gate arrays (FPGAs)
- Graphics cards

Model	Inductance Range**	DCR Max	Rated Current*	Dimensions in Inches [mm]
IHLP-2525AH-01 	0.1 μ H to 4.7 μ H 0.047 μ H to 1.0 μ H	3.5 m Ω to 78 m Ω	3 A to 18 A	L = 0.270 \pm 0.015 [6.86 \pm 0.381] W = 0.255 \pm 0.010 [6.47 \pm 0.254] H = 0.071 [1.80] max
IHLP-2525BD-01 	0.1 μ H to 10 μ H	1.7 m Ω to 129 m Ω	2.5 A to 30 A	L = 0.270 \pm 0.015 [6.86 \pm 0.381] W = 0.255 \pm 0.010 [6.47 \pm 0.254] H = 0.095 [2.40] max
IHLP-2525CZ-01 	0.1 μ H to 10 μ H	1.7 m Ω to 105 m Ω	3 A to 32.5 A	L = 0.270 \pm 0.015 [6.86 \pm 0.381] W = 0.255 \pm 0.010 [6.47 \pm 0.254] H = 0.118 [3.00] max
IHLP-2525CZ-11 	1.0 μ H to 22 μ H	8.0 m Ω to 135 m Ω	2.9 A to 12.5 A	L = 0.270 \pm 0.015 [6.86 \pm 0.381] W = 0.255 \pm 0.010 [6.47 \pm 0.254] H = 0.118 [3.00] max
IHLP-2525CZ-06 	0.1 μ H to 10 μ H	1.37 m Ω to 97.71 m Ω \pm 10 % DCR tolerance 10 %	3 A to 32.5 A	L = 0.270 \pm 0.015 [6.86 \pm 0.381] W = 0.255 \pm 0.010 [6.47 \pm 0.254] H = 0.118 [3.00] max
IHLP-2525CZ-07 	0.1 μ H to 10 μ H	1.37 m Ω to 97.71 m Ω \pm 5 % DCR tolerance 5 %	3 A to 32.5 A	L = 0.270 \pm 0.015 [6.86 \pm 0.381] W = 0.255 \pm 0.010 [6.47 \pm 0.254] H = 0.118 [3.00] max
IHLP-2525EZ-01 	0.56 μ H to 10 μ H	3.6 m Ω to 71.3 m Ω	4.5 A to 20 A	L = 0.270 \pm 0.015 [6.86 \pm 0.381] W = 0.255 \pm 0.010 [6.47 \pm 0.254] H = 0.197 [5.00] max
IHLM-2525CZ-01 	0.1 μ H to 10 μ H	1.7 m Ω to 105 m Ω	3 A to 32.5 A	L = 0.270 \pm 0.015 [6.86 \pm 0.381] W = 0.255 \pm 0.010 [6.47 \pm 0.254] H = 0.118 [3.00] max
IHLM-2525CZ-06 	0.1 μ H to 10 μ H	1.37 m Ω to 97.71 m Ω \pm 10 % DCR tolerance 10 %	3 A to 32.5 A	L = 0.270 \pm 0.015 [6.86 \pm 0.381] W = 0.255 \pm 0.010 [6.47 \pm 0.254] H = 0.118 [3.00] max
IHLM-2525CZ-07 	0.1 μ H to 10 μ H	1.37 m Ω to 97.71 m Ω \pm 5 % DCR tolerance 5 %	3 A to 32.5 A	L = 0.270 \pm 0.015 [6.86 \pm 0.381] W = 0.255 \pm 0.010 [6.47 \pm 0.254] H = 0.118 [3.00] max

* DC current (A) that will cause an approximate ΔT of 40 °C.














** Other values available upon request.

IHLP Frequency Range		
Series	DC/DC Converters	Filter Inductors
-01	100 KHz to 1 MHz+	Up to SRF of Inductor
-11	25 KHz to 500 KHz	



SURFACE-MOUNT POWER INDUCTORS

For Commercial Applications

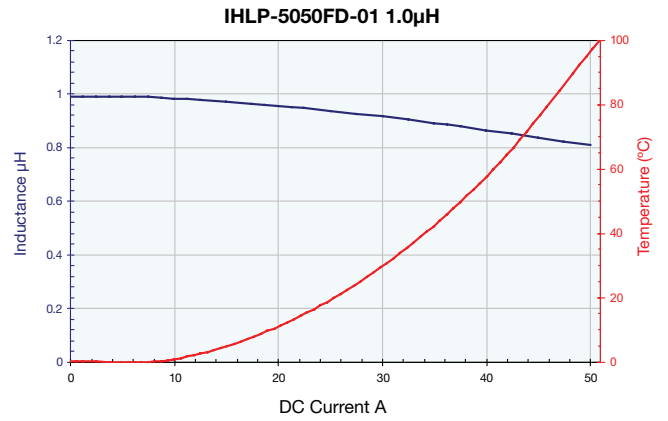
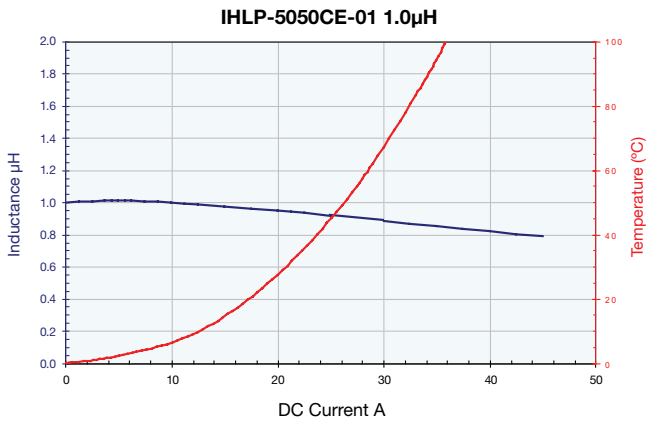
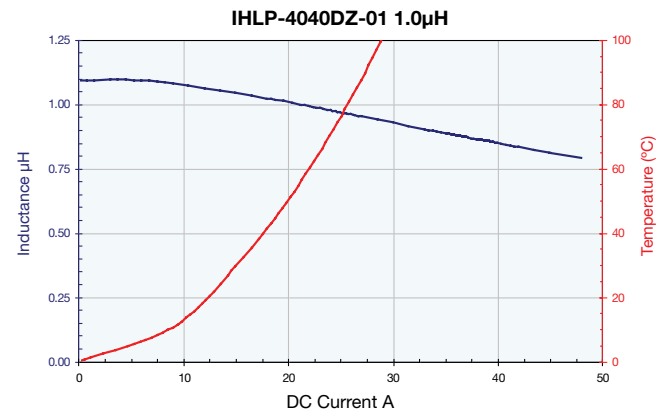
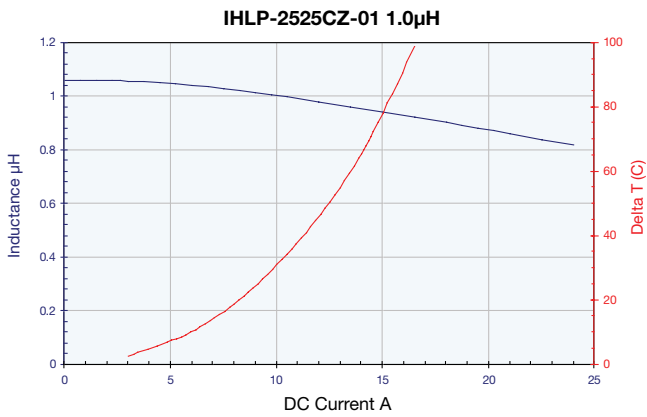
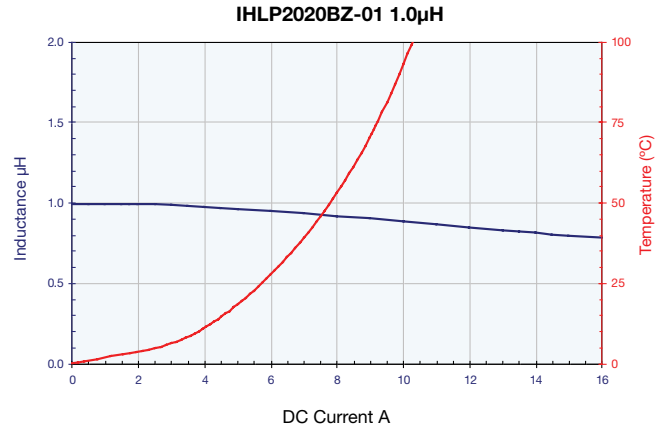
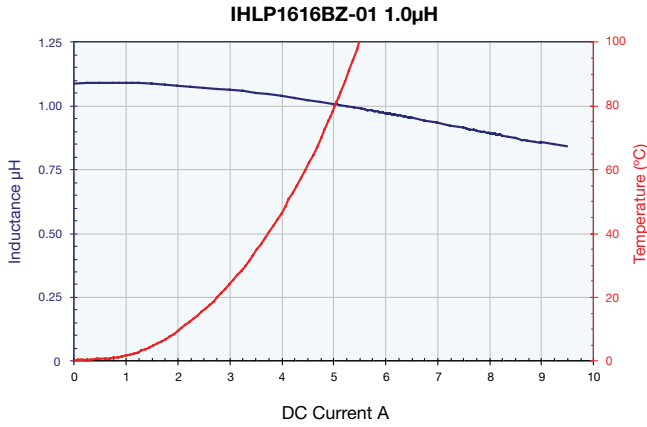
Model	Inductance Range**	DCR Max	Rated Current*	Dimensions in Inches [mm]
IHLP-4040DZ-01 	0.19 μ H to 10 μ H	0.95 m Ω to 36.5 m Ω	6.8 A to 40.0 A	L = 0.453 [11.5] max W = 0.405 [10.3] max H = 0.158 [4.00] max
IHLP-4040DZ-11 	0.19 μ H to 100 μ H	0.8 m Ω to 270.0 m Ω	2.5 A to 40 A	L = 0.453 [11.5] max W = 0.405 [10.3] max H = 0.158 [4.00] max
IHLP-5050CE-01 	0.1 μ H to 10 μ H	0.96 m Ω to 34 m Ω	7 A to 43 A	L = 0.520 \pm 0.015 [13.2 \pm 0.38] W = 0.508 [12.9] max H = 0.138 [3.5] max
IHLP-5050CE-06 	0.6 μ H to 10 μ H	1.85 m Ω to 30.86 m Ω \pm 10 DCR tolerance \pm 10 %	7 A to 29 A	L = 0.520 \pm 0.015 [13.2 \pm 0.38] W = 0.508 [12.9] max H = 0.138 [3.5] max
IHLP-5050CE-07 	0.6 μ H to 10 μ H	1.85 m Ω to 30.86 m Ω \pm 5 DCR tolerance 5 %	7 A to 29 A	L = 0.520 \pm 0.015 [13.2 \pm 0.38] W = 0.508 [12.9] max H = 0.138 [3.5] max
IHLP-5050EZ-01 	0.1 μ H to 10 μ H	0.60 m Ω to 25.5 m Ω	9 A to 55 A	L = 0.520 \pm 0.015 [13.2 \pm 0.38] W = 0.508 [12.9] max H = 0.197 [5.0] max
IHLP-5050FD-01 	0.1 μ H to 10 μ H	0.50 m Ω to 17.2 m Ω	10 A to 60 A	L = 0.520 \pm 0.015 [13.2 \pm 0.38] W = 0.508 [12.9] max H = 0.256 [6.5] max
IHLP-6767DZ-01 	0.22 μ H to 10 μ H	0.88 m Ω to 24.9 m Ω	9.7 A to 65 A	L = 0.695 \pm 0.010 [17.65 \pm 0.254] W = 0.675 \pm 0.010 [17.15 \pm 0.254] H = 0.158 [4.0] max
IHLP-6767DZ-11 	0.22 μ H to 47 μ H	0.88 m Ω to 104 m Ω	4.6 A to 65 A	L = 0.695 \pm 0.010 [17.65 \pm 0.254] W = 0.675 \pm 0.010 [17.15 \pm 0.254] H = 0.158 [4.0] max
IHLP-6767GZ-01 	0.22 μ H to 22 μ H	0.66 m Ω to 26.5 m Ω	11 A to 80 A	L = 0.695 \pm 0.010 [17.65 \pm 0.254] W = 0.675 \pm 0.010 [17.15 \pm 0.254] H = 0.276 [7.0] max
IHLP-6767GZ-11 	0.33 μ H to 100 μ H	0.67 m Ω to 110 m Ω	5.0 A to 75.5 A	L = 0.695 \pm 0.010 [17.65 \pm 0.254] W = 0.675 \pm 0.010 [17.15 \pm 0.254] H = 0.276 [7.0] max
IHLW-4040CF-11 	0.1 μ H to 22 μ H	0.70 m Ω to 7.21 m Ω	16 A to 46 A	L = 0.400 \pm 0.005 [10.16 \pm 0.127] W = 0.400 \pm 0.005 [10.16 \pm 0.127] H = 0.142 [3.6] max
IHLW-5050CE-01 	0.1 μ H to 10 μ H	0.96 m Ω to 34 m Ω	7 A to 43 A	L = 0.500 \pm 0.005 [12.7 \pm 0.127] W = 0.500 \pm 0.005 [12.7 \pm 0.127] H = 0.138 [3.5] max

* DC current (A) that will cause an approximate ΔT of 40 °C.

** Other values available upon request.

SURFACE-MOUNT POWER INDUCTORS

For Commercial Applications



DISCLAIMER All product specifications and data are subject to change without notice. Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications. Product names and markings noted herein may be trademarks of their respective owners.

SEMICONDUCTORS:

Rectifiers • High-Power Diodes and Thyristors • Small-Signal Diodes • Zener and Suppressor Diodes
• FETs • Optoelectronics • ICs • Modules

PASSIVE COMPONENTS:

Resistive Products • Magnetics • Capacitors



One of the World's Largest Manufacturers of
Discrete Semiconductors and Passive Components

WORLDWIDE SALES CONTACTS

THE AMERICAS

UNITED STATES

VISHAY AMERICAS
ONE GREENWICH PLACE
SHELTON, CT 06484
UNITED STATES
PH: +1-402-563-6866
FAX: +1-402-563-6296

ASIA

SINGAPORE

VISHAY INTERTECHNOLOGY ASIA PTE LTD.
37A TAMPINES STREET 92 #07-00
SINGAPORE 528886
PH: +65-6788-6668
FAX: +65-6788-0988

P.R. CHINA

VISHAY CHINA CO., LTD.
15D, SUN TONG INFOPORT PLAZA
55 HUAI HAI WEST ROAD
SHANGHAI 200030
P.R. CHINA
PH: +86-21-5258 5000
FAX: +86-21-5258 7979

JAPAN

VISHAY JAPAN CO., LTD.
SHIBUYA PRESTIGE BLDG. 4F
3-12-22, SHIBUYA
SHIBUYA-KU
TOKYO 150-0002
JAPAN
PH: +81-3-5466-7150
FAX: +81-3-5466-7160

EUROPE

GERMANY

VISHAY ELECTRONIC GMBH
GEHEIMRAT-ROSENTHAL-STR. 100
95100 SELB
GERMANY
PH: +49-9287-71-0
FAX: +49-9287-70435

FRANCE

VISHAY S.A.
199, BLVD DE LA MADELEINE
06003 NICE, CEDEX 1
FRANCE
PH: +33-4-9337-2727
FAX: +33-4-9337-2726

UNITED KINGDOM

VISHAY LTD.
SUITE 6C, TOWER HOUSE
ST. CATHERINE'S COURT
SUNDERLAND ENTERPRISE PARK
SUNDERLAND SR5 3XJ
UNITED KINGDOM
PH: +44-191-516-8584
FAX: +44-191-549-9556

Build **Vishay**
into your **Design**

www.vishay.com

VMN-SG2027-1006