


Fast Recovery Diodes (T-Modules), 40 A/70 A/85 A



D-55

FEATURES

- Fast recovery time characteristics
- Electrically isolated base plate
- 3500 V_{RMS} isolating voltage
- Standard JEDEC package
- Simplified mechanical designs, rapid assembly
- Large creepage distances
- UL E78996 approved 
- Compliant to RoHS directive 2002/95/EC
- Designed and qualified for industrial level



RoHS
COMPLIANT

DESCRIPTION

The series of T-modules uses fast recovery power diodes in a single diode configuration. The semiconductors are electrically isolated from the metal base, allowing common heatsink and compact assemblies to be built.

These single diode modules can be used in conjunction with the thyristor modules as a freewheel diode. Application includes self-commutated inverters, DC choppers, motor control, inductive heating and electronic welders. These modules are intended for those applications where very fast recovery characteristics are required and for general power switching applications.

PRODUCT SUMMARY

$I_{F(AV)}$	40 A/70 A/85 A
Type	Modules - Diode, Fast

MAJOR RATINGS AND CHARACTERISTICS

SYMBOL	CHARACTERISTICS	T40HFL	T70HFL	T85HFL	UNITS
$I_{F(AV)}$		40	70	85	A
$I_{F(RMS)}$		63	110	133	A
I_{FSM}	50 Hz	475	830	1300	A
	60 Hz	500	870	1370	
I^2t	50 Hz	1130	3460	8550	A ² s
	60 Hz	1030	3160	7810	
V_{RRM}	Range	100 to 1000			V
t_{rr}	Range	200 to 1000			ns
T_J	Range	- 40 to 125			°C

T40HFL, T70HFL, T85HFL Series



Vishay Semiconductors

Fast Recovery Diodes
(T-Modules), 40 A/70 A/85 A

ELECTRICAL SPECIFICATIONS

VOLTAGE RATINGS					
TYPE NUMBER	VOLTAGE CODE	t_{rr} CODE	V_{RRM} , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V	V_{RSM} , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	I_{RRM} MAXIMUM AT $T_J = 25^\circ\text{C}$ μA
T40HFL.. T70HFL.. T85HFL..	10	S02, S05, S10	100	150	100
	20	S02, S05, S10	200	300	
	40	S02, S05, S10	400	500	
	60	S02, S05, S10	600	700	
	80	S05, S10	800	900	
	100	S05, S10	1000	1100	

FORWARD CONDUCTION								
PARAMETER	SYMBOL	TEST CONDITIONS			T40HFL	T70HFL	T85HFL	UNITS
Maximum average forward current at case temperature	$I_{F(AV)}$	180° conduction, half sine wave			40	70	85	A
					70			°C
Maximum RMS forward current	$I_{F(RMS)}$				63	110	133	A
Maximum peak, one-cycle forward, non-repetitive surge current	I_{FSM}	t = 10 ms	No voltage reappplied	Sinusoidal half wave, initial $T_J = T_J$ maximum	475	830	1300	A
		t = 8.3 ms			500	870	1370	
		t = 10 ms	100 % V_{RRM} reappplied		400	700	1100	
		t = 8.3 ms			420	730	1150	
Maximum I^2t for fusing	I^2t	t = 10 ms	No voltage reappplied		1130	3460	8550	A ² s
		t = 8.3 ms			1030	3160	7810	
		t = 10 ms	100 % V_{RRM} reappplied		800	2450	6050	
		t = 8.3 ms			730	2230	5520	
Maximum $I^2\sqrt{t}$ for fusing	$I^2\sqrt{t}$	t = 0.1 ms to 10 ms, no voltage reappplied			11 300	34 600	85 500	A ² √s
Low level value of threshold voltage	$V_{F(TO)1}$	$T_J = 25^\circ\text{C}$, $(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$			0.82	0.87	0.84	V
High level value of threshold voltage	$V_{F(TO)2}$	$T_J = 25^\circ\text{C}$, $(I > \pi \times I_{F(AV)})$			0.84	0.90	0.86	
Low level value of forward slope resistance	r_{f1}	$T_J = 25^\circ\text{C}$, $(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$			7.0	2.77	2.15	mΩ
High level value of forward slope resistance	r_{f2}	$T_J = 25^\circ\text{C}$, $(I > \pi \times I_{F(AV)})$			6.8	2.67	2.07	
Maximum forward voltage drop	V_{FM}	$I_{FM} = \pi \times I_{F(AV)}$, $T_J = 25^\circ\text{C}$, $t_p = 400 \mu\text{s}$ square wave Average power = $V_{F(TO)} \times I_{F(AV)} + r_f \times (I_{F(RMS)})^2$			1.60	1.73	1.55	V



T40HFL, T70HFL, T85HFL Series

Fast Recovery Diodes
(T-Modules), 40 A/70 A/85 A

Vishay Semiconductors

REVERSE RECOVERY CHARACTERISTICS												
PARAMETER	SYMBOL	TEST CONDITIONS ⁽¹⁾	T40HFL			T70HFL			T85HFL			UNITS
			S02	S05	S10	S02	S05	S10	S02	S05	S10	
Maximum reverse recovery time	t_{rr}	$T_J = 25\text{ }^\circ\text{C}$, $-di_F/dt = 100\text{ A}/\mu\text{s}$ $I_F = 1\text{ A}$ to $V_R = 30\text{ V}$	70	110	270	70	110	270	80	120	290	ns
		$T_J = 25\text{ }^\circ\text{C}$, $-di_F/dt = 25\text{ A}/\mu\text{s}$ $I_{FM} = \pi \times \text{rated } I_{F(AV)}$, $V_R = -30\text{ V}$	200	500	1000	200	500	1000	200	500	1000	
Maximum reverse recovery charge	Q_{rr}	$T_J = 25\text{ }^\circ\text{C}$, $-di_F/dt = 100\text{ A}/\mu\text{s}$ $I_F = 1\text{ A}$ to $V_R = 30\text{ V}$	0.25	0.4	1.35	0.25	0.4	1.35	0.3	0.6	1.6	μC
		$T_J = 25\text{ }^\circ\text{C}$, $-di_F/dt = 25\text{ A}/\mu\text{s}$ $I_{FM} = \pi \times \text{rated } I_{F(AV)}$, $V_R = -30\text{ V}$	0.55	2.0	8.0	0.6	2.1	8.5	0.8	3.5	1.5	

Note

⁽¹⁾ Tested on LEM 300 A diodometer tester

BLOCKING						
PARAMETER	SYMBOL	TEST CONDITIONS	T40HFL	T70HFL	T85HFL	UNITS
Maximum peak reverse leakage current	I_{RRM}	$T_J = 125\text{ }^\circ\text{C}$	20			mA
RMS isolation voltage	V_{ISOL}	50 Hz, circuit to base, all terminals shorted, $T_J = 25\text{ }^\circ\text{C}$, $t = 1\text{ s}$	3500			V

THERMAL AND MECHANICAL SPECIFICATIONS						
PARAMETER	SYMBOL	TEST CONDITIONS	T40HFL	T70HFL	T85HFL	UNITS
Junction operating temperature range	T_J		- 40 to 125			$^\circ\text{C}$
Storage temperature range	T_{Stg}		- 40 to 150			
Maximum internal thermal resistance, junction to case per module	R_{thJC}	DC operation	0.85	0.53	0.46	K/W
Thermal resistance, case to heatsink per module	R_{thCS}	Mounting surface, flat, smooth and greased	0.2			
Mounting torque $\pm 10\%$	base to heatsink	M3.5 mounting screws ⁽¹⁾ Non-lubricated threads	1.3 $\pm 10\%$			Nm
	busbar to terminal	M5 screws terminals Non-lubricated threads	3 $\pm 10\%$			
Approximate weight		See dimensions - link at the end of datasheet	54			g
			19			oz.
Case style			D-55 (T-module)			

Note

⁽¹⁾ A mounting compound is recommended and the torque should be rechecked after a period of about 3 hours to allow for the spread of the compound

ΔR CONDUCTION											
DEVICES	SINUSOIDAL CONDUCTION AT T_J MAXIMUM					RECTANGULAR CONDUCTION AT T_J MAXIMUM					UNITS
	180°	120°	90°	60°	30°	180°	120°	90°	60°	30°	
T40HFL	0.06	0.08	0.10	0.14	0.24	0.05	0.08	0.10	0.15	0.24	K/W
T70HFL	0.05	0.06	0.08	0.11	0.19	0.04	0.06	0.08	0.12	0.19	
T85HFL	0.04	0.05	0.06	0.09	0.15	0.03	0.05	0.07	0.09	0.015	

Note

• The table above shows the increment of thermal resistance R_{thJC} when devices operate at different conduction angles than DC

T40HFL, T70HFL, T85HFL Series

Vishay Semiconductors

Fast Recovery Diodes
(T-Modules), 40 A/70 A/85 A

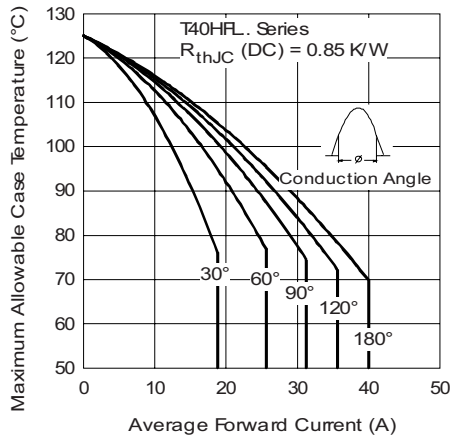


Fig. 1 - Current Ratings Characteristics

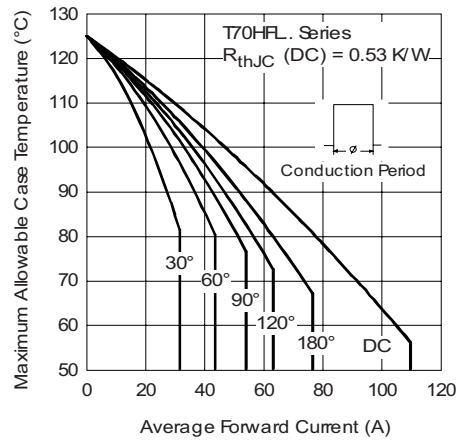


Fig. 4 - Current Ratings Characteristics

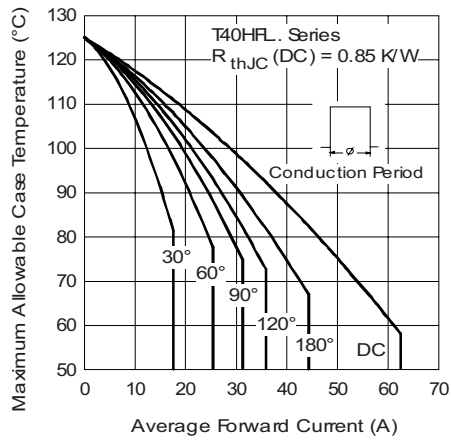


Fig. 2 - Current Ratings Characteristics

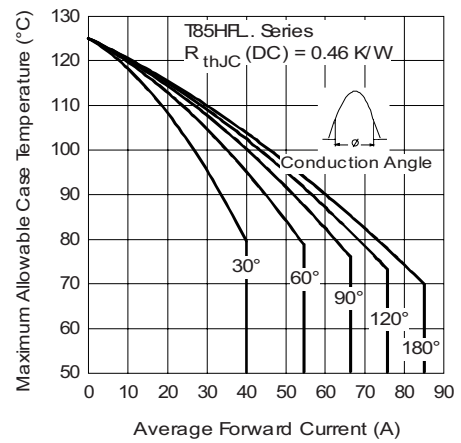


Fig. 5 - Current Ratings Characteristics

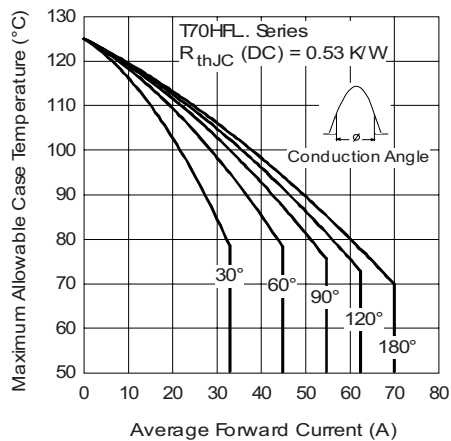


Fig. 3 - Current Ratings Characteristics

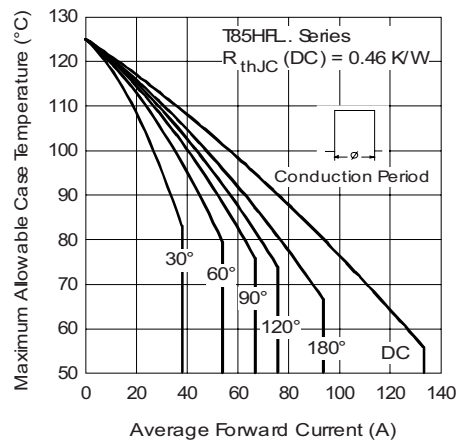


Fig. 6 - Current Ratings Characteristics



T40HFL, T70HFL, T85HFL Series

Fast Recovery Diodes
(T-Modules), 40 A/70 A/85 A

Vishay Semiconductors

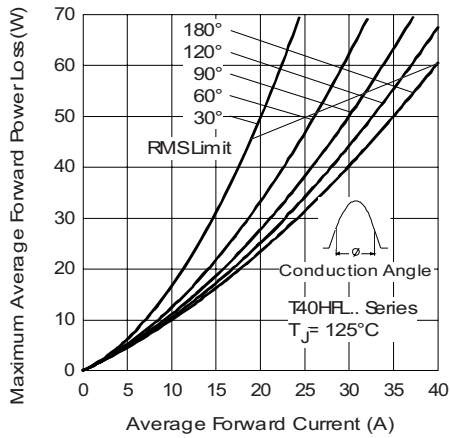


Fig. 7 - Forward Power Loss Characteristics

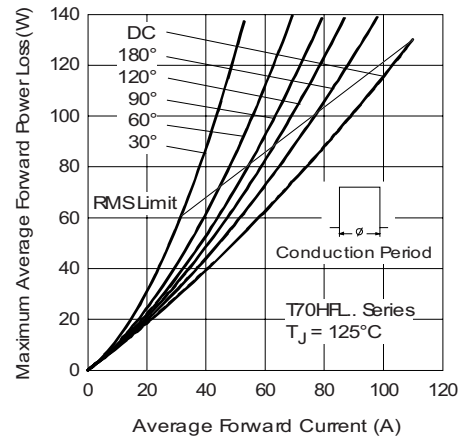


Fig. 10 - Forward Power Loss Characteristics

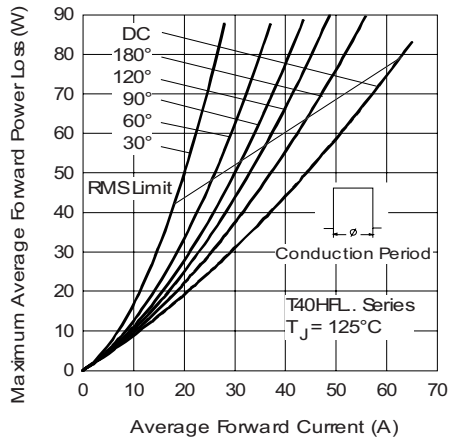


Fig. 8 - Forward Power Loss Characteristics

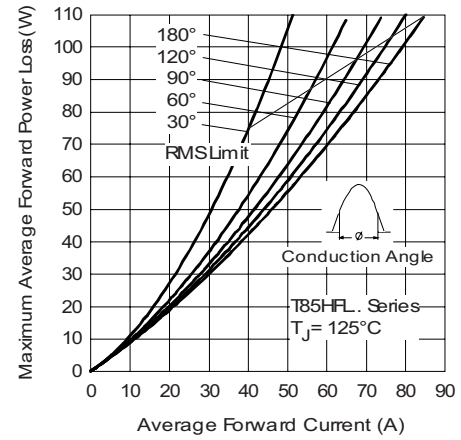


Fig. 11 - Forward Power Loss Characteristics

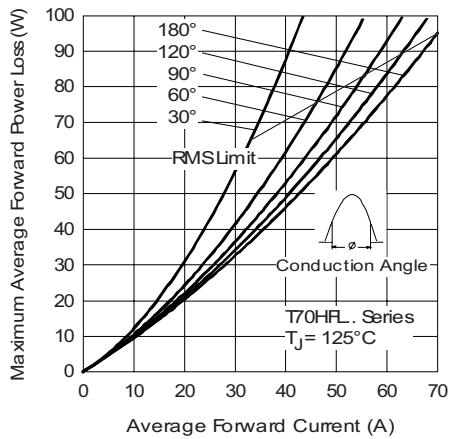


Fig. 9 - Forward Power Loss Characteristics

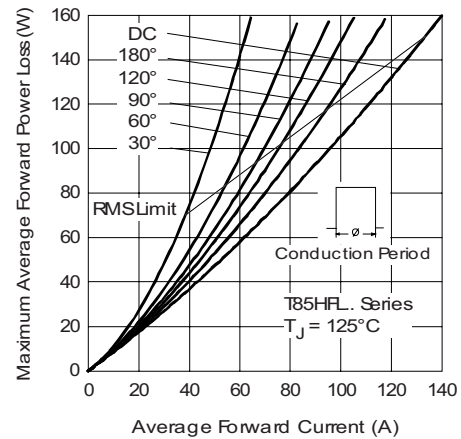


Fig. 12 - Forward Power Loss Characteristics

T40HFL, T70HFL, T85HFL Series

Vishay Semiconductors

Fast Recovery Diodes
(T-Modules), 40 A/70 A/85 A

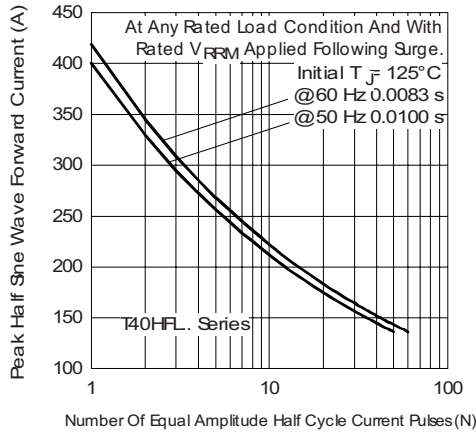


Fig. 13 - Maximum Non-Repetitive Surge Current

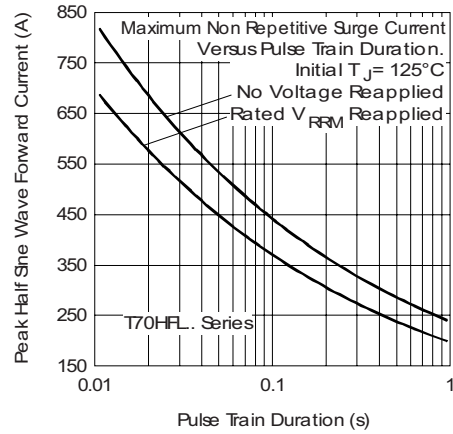


Fig. 16 - Maximum Non-Repetitive Surge Current

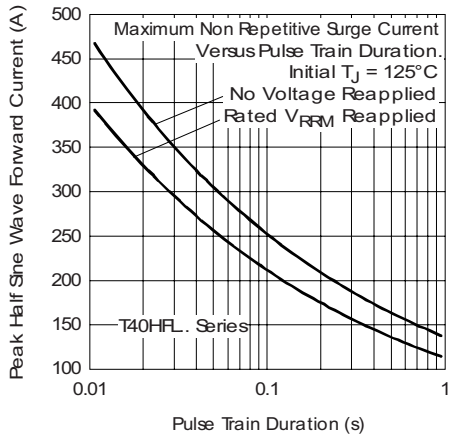


Fig. 14 - Maximum Non-Repetitive Surge Current

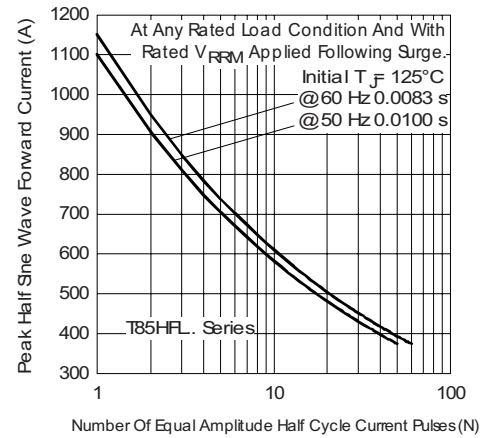


Fig. 17 - Maximum Non-Repetitive Surge Current

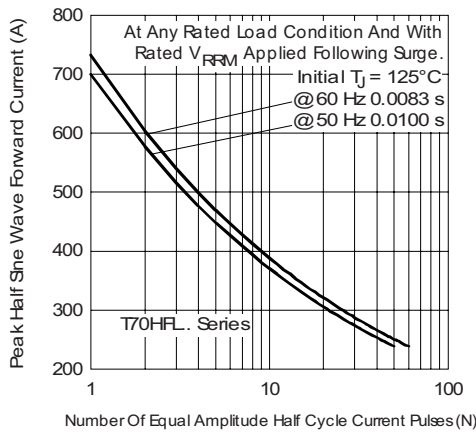


Fig. 15 - Maximum Non-Repetitive Surge Current

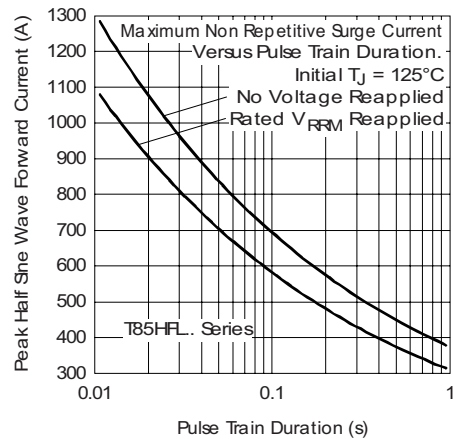



Fig. 18 - Maximum Non-Repetitive Surge Current



T40HFL, T70HFL, T85HFL Series


Fast Recovery Diodes
(T-Modules), 40 A/70 A/85 A

Vishay Semiconductors

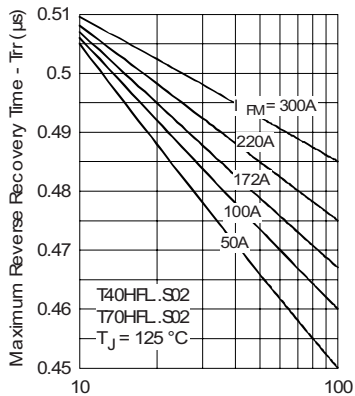

Rate Of Fall Of Forward Current - di/dt (A/μs)

Fig. 19 - Recovery Time Characteristics

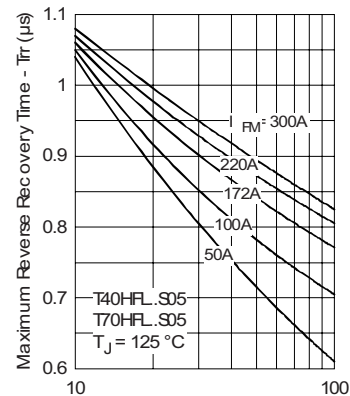

Rate Of Fall Of Forward Current - di/dt (A/μs)

Fig. 22 - Recovery Time Characteristics

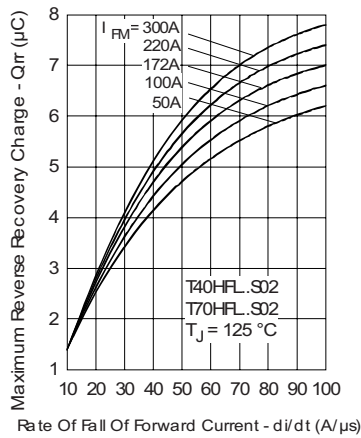


Fig. 20 - Recovery Charge Characteristics

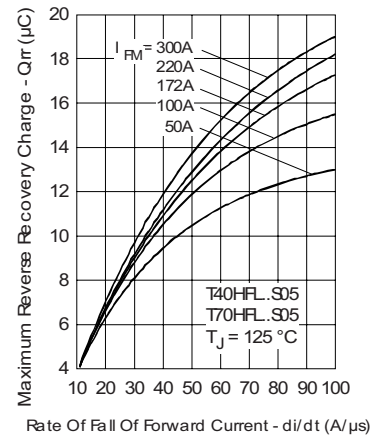


Fig. 23 - Recovery Charge Characteristics

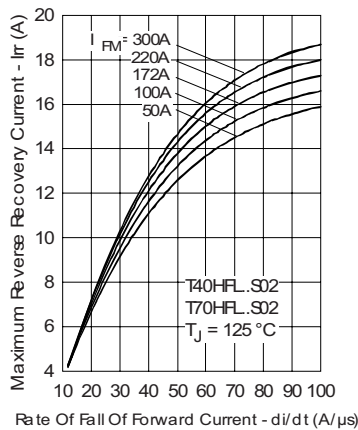


Fig. 21 - Recovery Current Characteristics

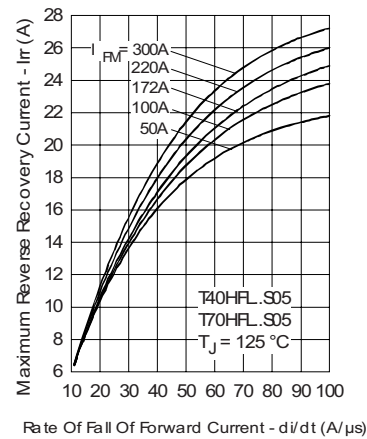


Fig. 24 - Recovery Current Characteristics

T40HFL, T70HFL, T85HFL Series

Vishay Semiconductors

Fast Recovery Diodes
(T-Modules), 40 A/70 A/85 A

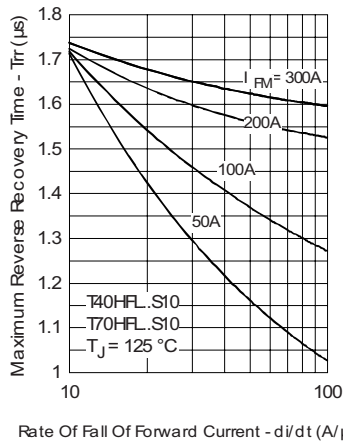


Fig. 25 - Recovery Time Characteristics

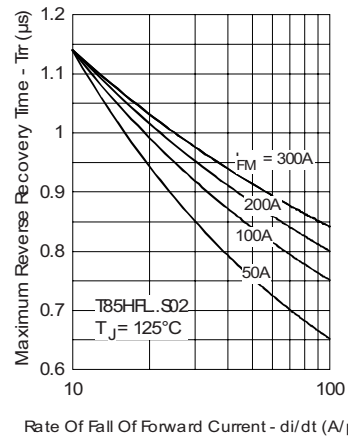


Fig. 28 - Recovery Time Characteristics

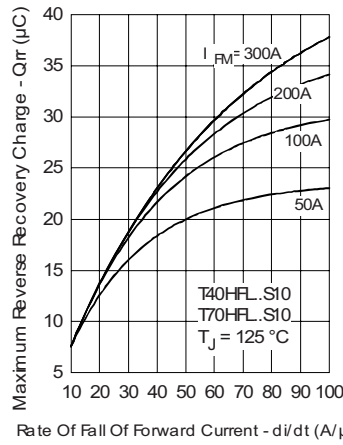


Fig. 26 - Recovery Charge Characteristics

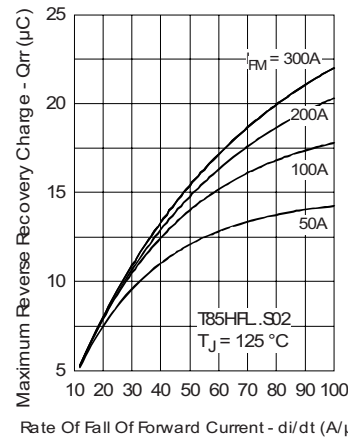


Fig. 29 - Recovery Charge Characteristics

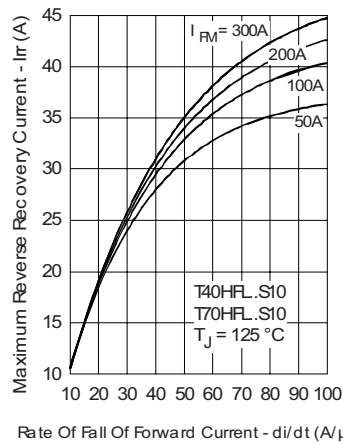


Fig. 27 - Recovery Current Characteristics

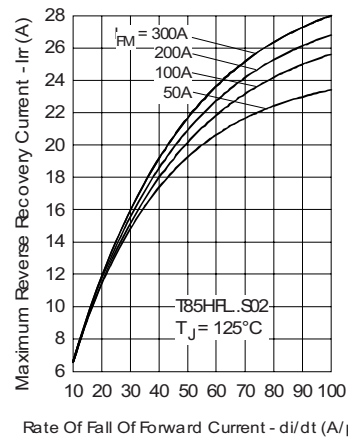


Fig. 30 - Recovery Current Characteristics



T40HFL, T70HFL, T85HFL Series

Fast Recovery Diodes
(T-Modules), 40 A/70 A/85 A

Vishay Semiconductors

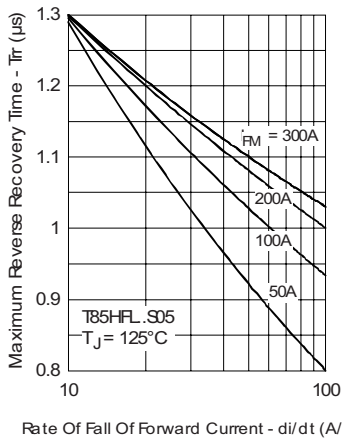


Fig. 31 - Recovery Time Characteristics

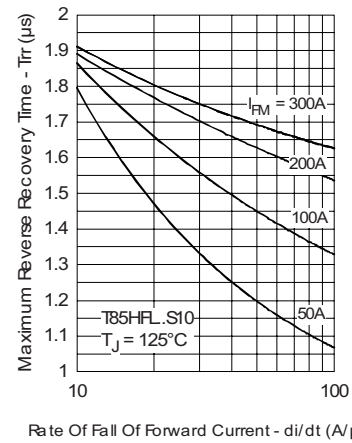


Fig. 34 - Recovery Time Characteristics

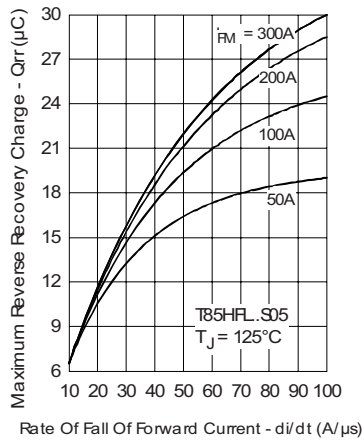


Fig. 32 - Recovery Charge Characteristics

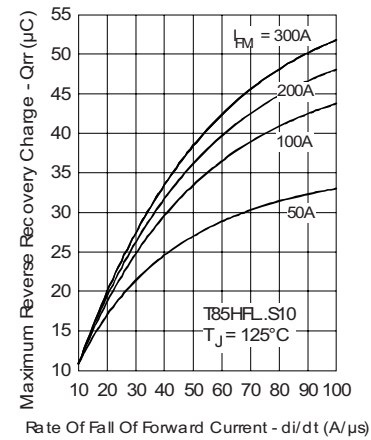


Fig. 35 - Recovery Charge Characteristics

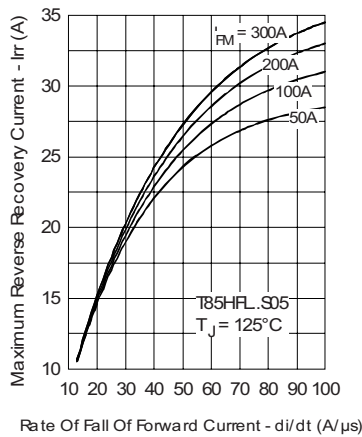


Fig. 33 - Recovery Current Characteristics

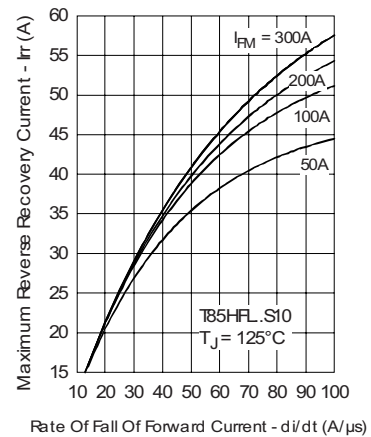


Fig. 36 - Recovery Current Characteristics

T40HFL, T70HFL, T85HFL Series

Vishay Semiconductors

Fast Recovery Diodes
(T-Modules), 40 A/70 A/85 A

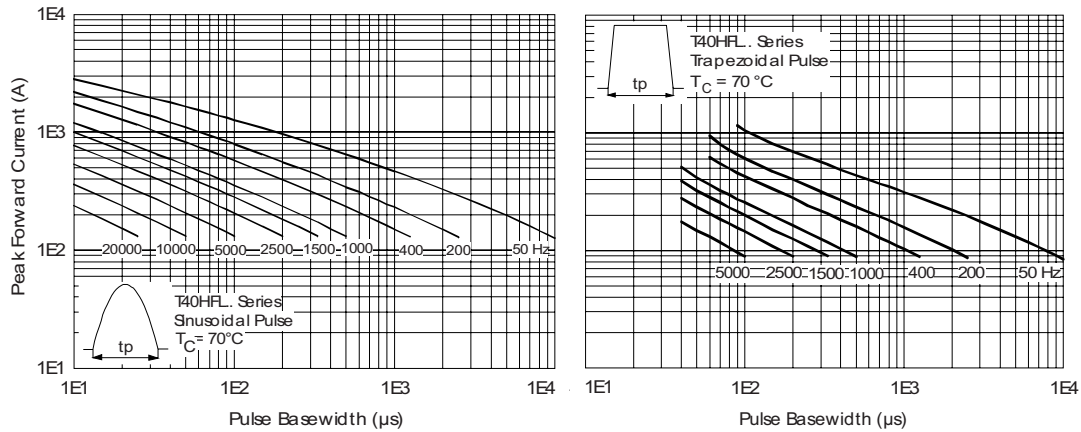


Fig. 37 - Frequency Characteristics

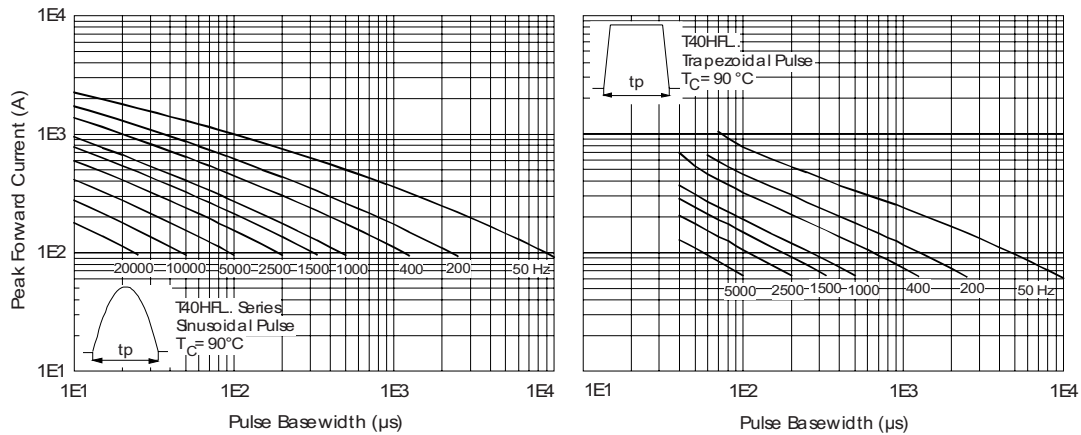


Fig. 38 - Frequency Characteristics

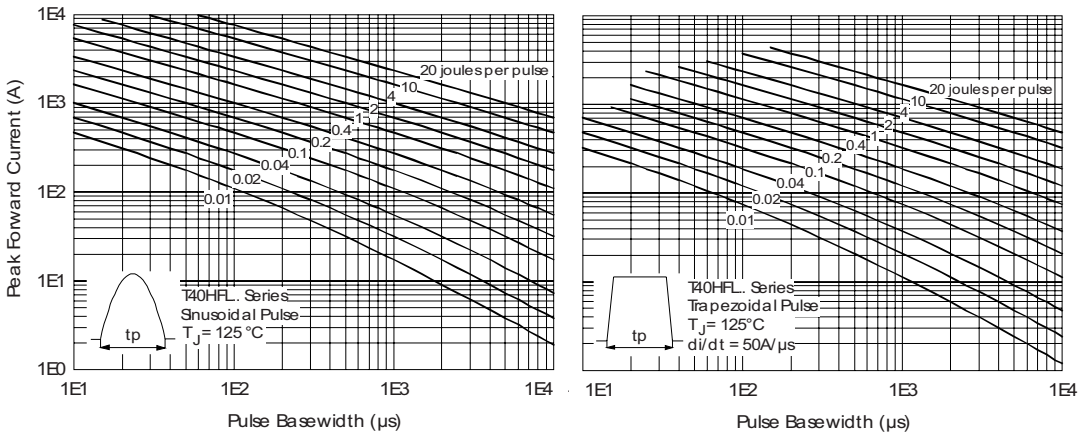


Fig. 39 - Maximum Forward Energy Power Loss Characteristics



T40HFL, T70HFL, T85HFL Series

Fast Recovery Diodes
(T-Modules), 40 A/70 A/85 A

Vishay Semiconductors

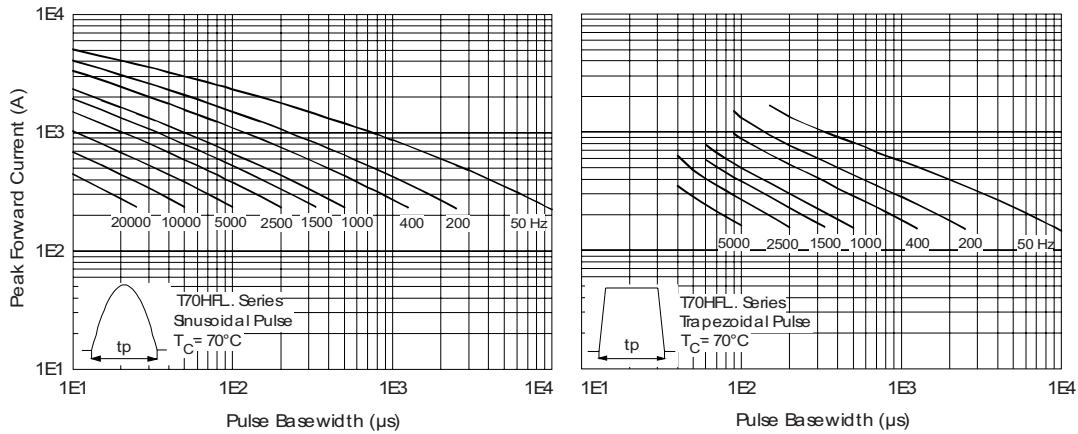


Fig. 40 - Frequency Characteristics

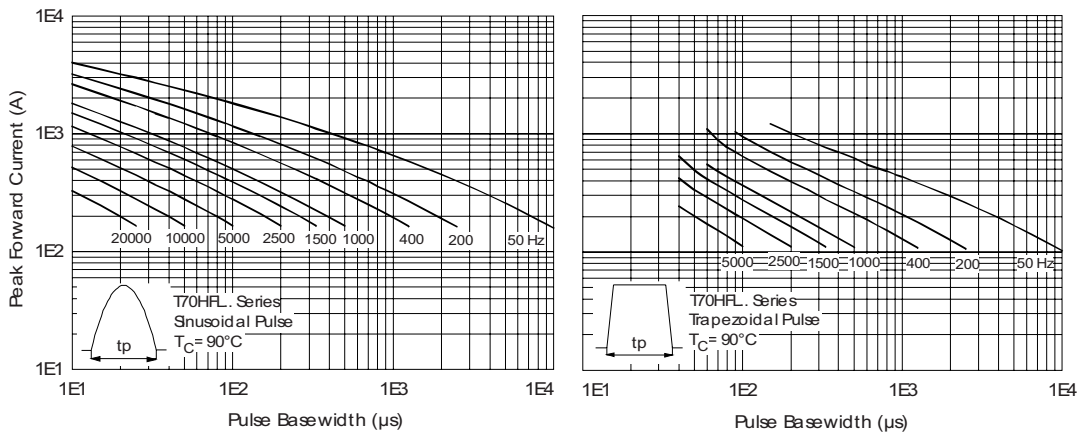


Fig. 41 - Frequency Characteristics

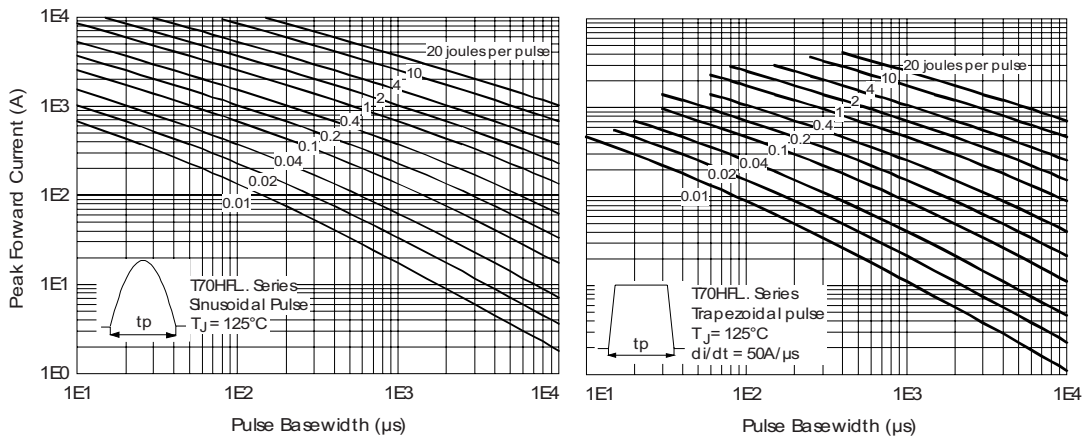


Fig. 42 - Maximum Forward Energy Power Loss Characteristics

T40HFL, T70HFL, T85HFL Series

Vishay Semiconductors

Fast Recovery Diodes
(T-Modules), 40 A/70 A/85 A

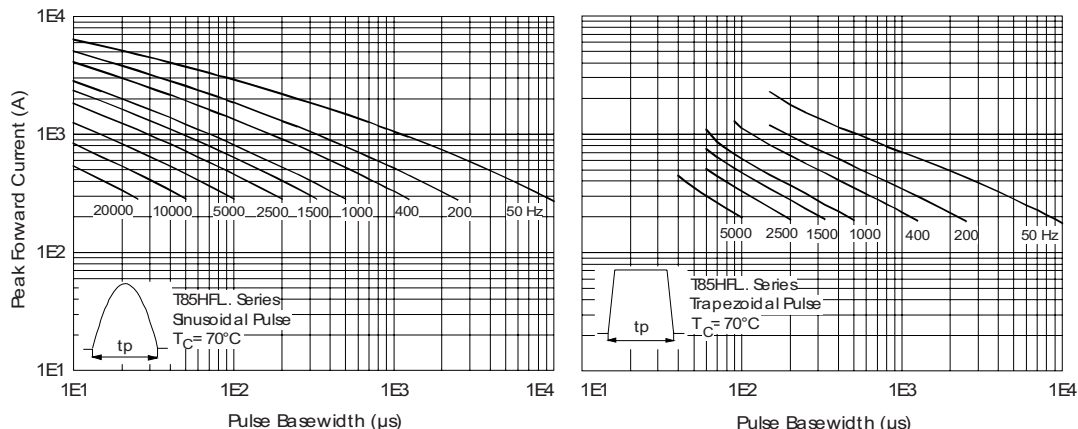


Fig. 43 - Frequency Characteristics

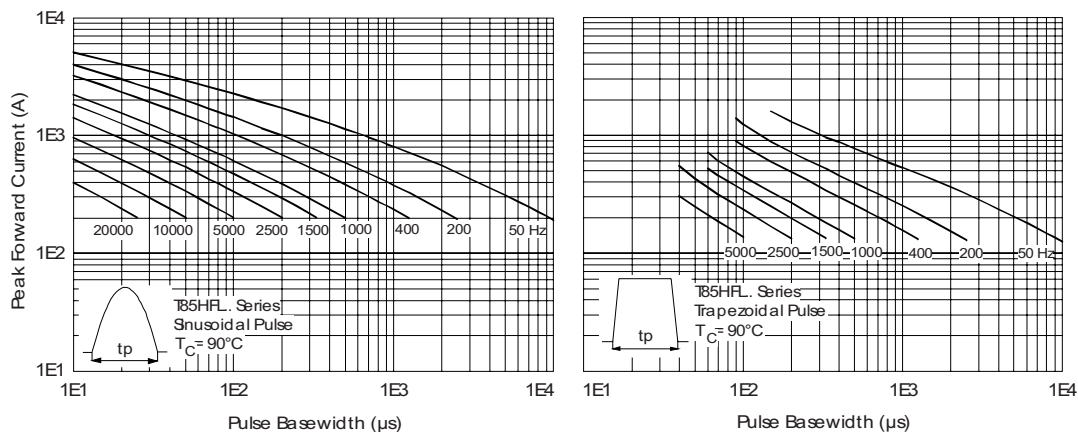


Fig. 44 - Frequency Characteristics

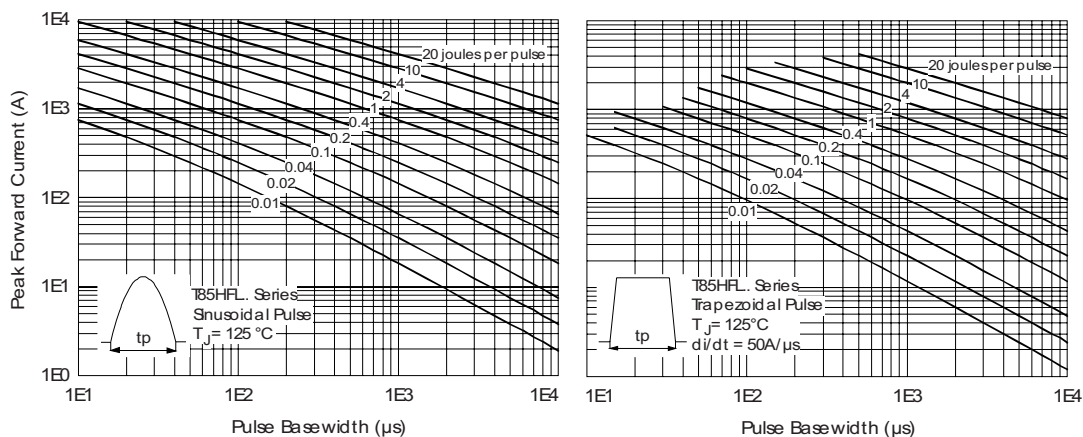


Fig. 45 - Maximum Forward Energy Power Loss Characteristics



T40HFL, T70HFL, T85HFL Series

Fast Recovery Diodes
(T-Modules), 40 A/70 A/85 A

Vishay Semiconductors

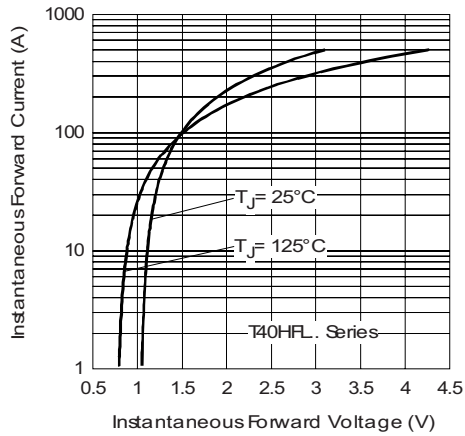


Fig. 46 - Forward Voltage Drop Characteristics

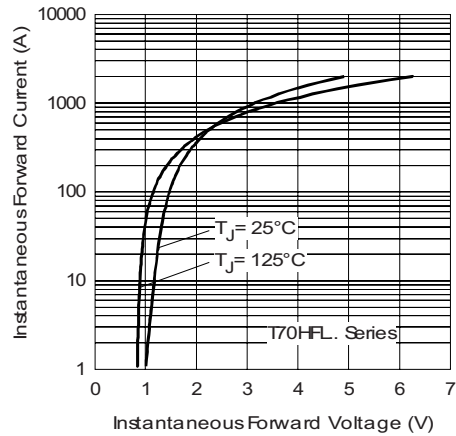


Fig. 47 - Forward Voltage Drop Characteristics

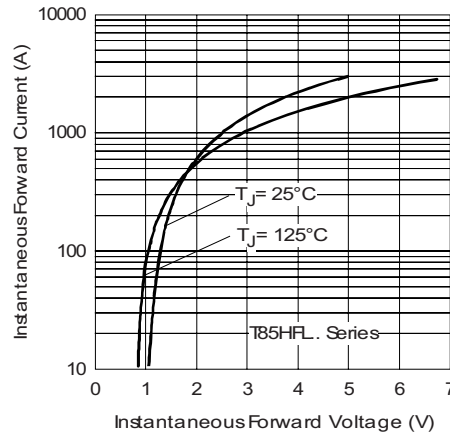


Fig. 48 - Forward Voltage Drop Characteristics

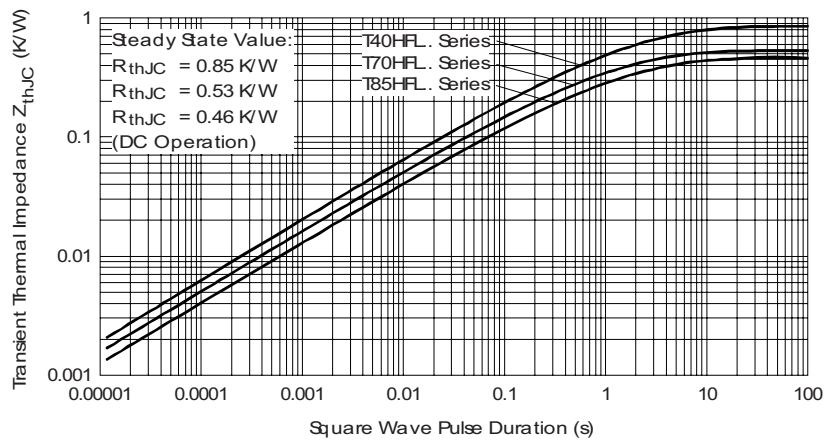


Fig. 49 - Thermal Impedance Z_{thJC} Characteristics


T40HFL, T70HFL, T85HFL Series



Vishay Semiconductors

Fast Recovery Diodes
(T-Modules), 40 A/70 A/85 A

ORDERING INFORMATION TABLE

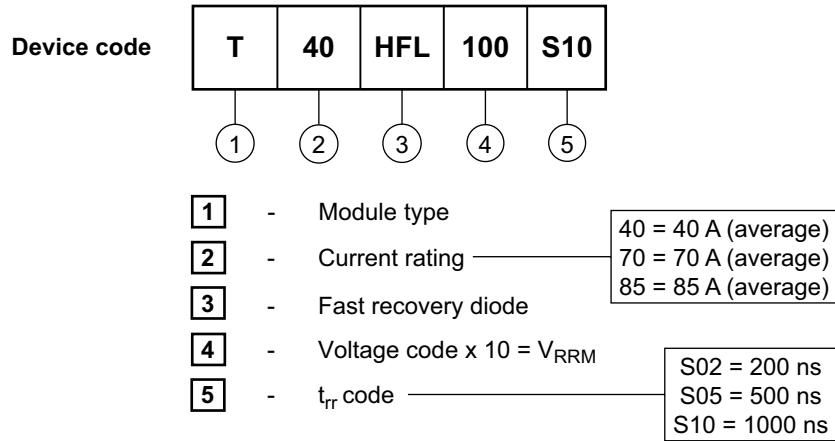

CIRCUIT CONFIGURATION		
CIRCUIT	CIRCUIT CONFIGURATION CODE	CIRCUIT DRAWING
Single switch diode	N/A	

LINKS TO RELATED DOCUMENTS	
Dimensions	www.vishay.com/doc?95313



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.