




VISHAY INTERTECHNOLOGY, INC.

LED LIGHTING DEVELOPMENT KIT

VL30-LDK / VL31-LDK

OPTOELECTRONICS

PRODUCT OVERVIEW

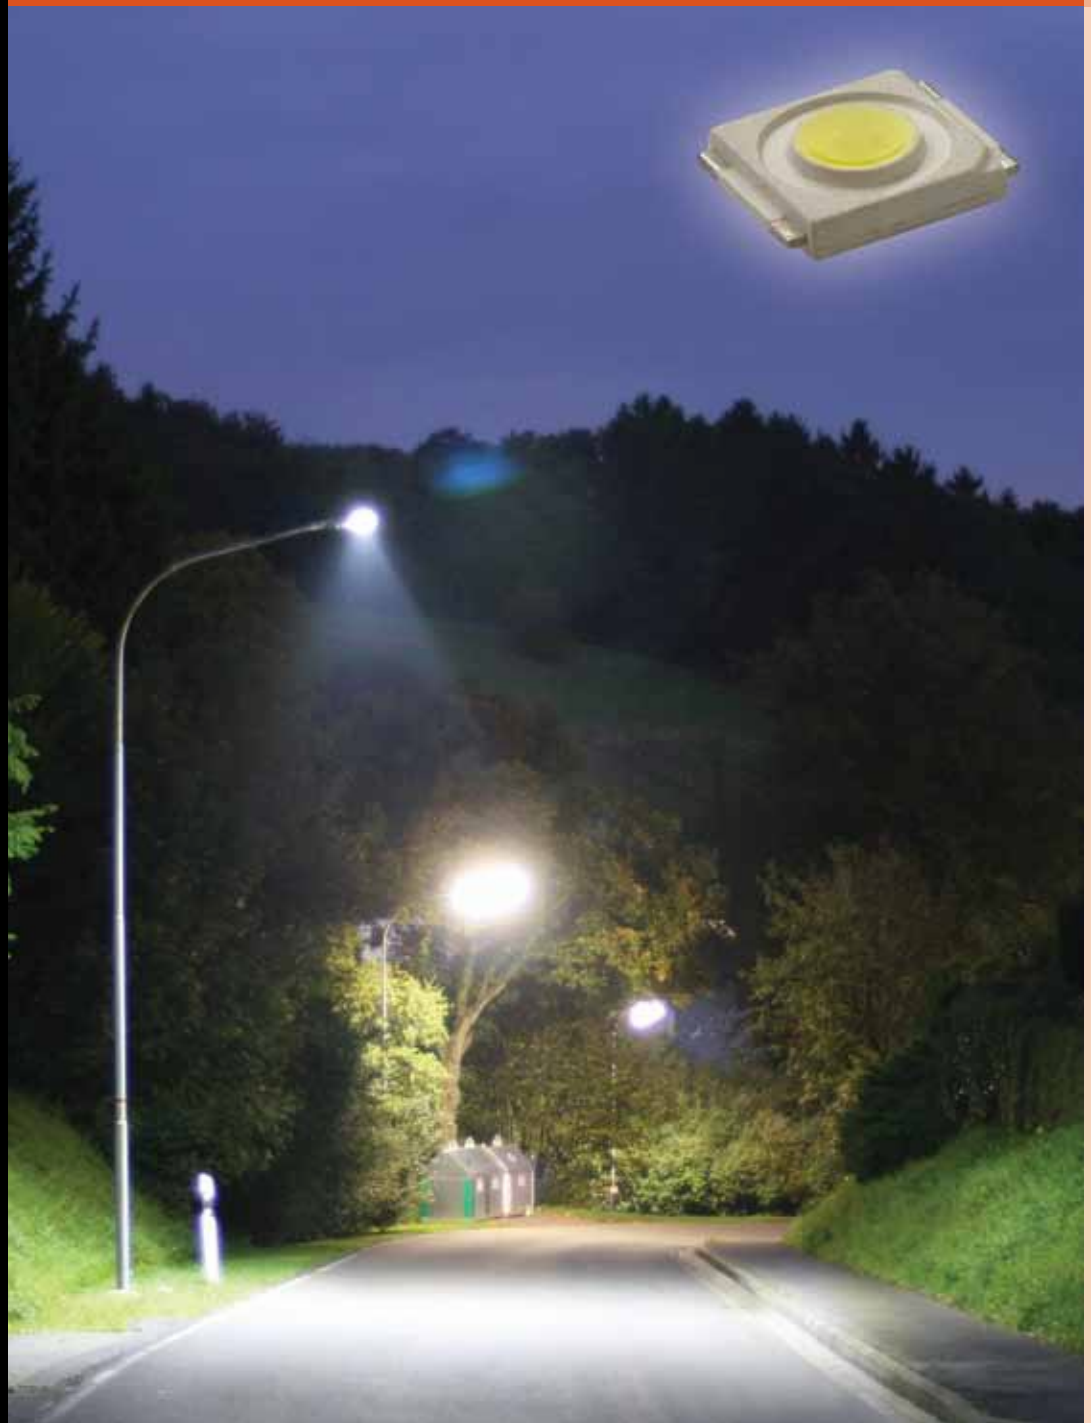



LED LIGHTING DEVELOPMENT KIT



Vishay Semiconductors

Introduction

Vishay's LED Lighting Development Kit is designed to give you everything you need to get up to speed designing with our solid-state lighting solutions. The kit includes an **LED lighting panel**, **reflectors**, and a **driver module**. It provides the basic tools to help you avoid development delays and focus on getting your product to market quickly, while adopting energy-efficient, environmentally friendly, long-lifetime LED lighting technology.

Lighting Panel: VL30 and VL31


The fully populated LED lighting panel included in each kit consists of 4 strings of 6 LEDs mounted on a single-sided, single-layer, copper-based PCB. A shiny white surface provides a small degree of reflectivity of incident light. The copper surface helps conduct heat away from the LEDs. Two lighting panels are available. The cool white panel features Vishay's VLMW711U2U3XV high bright white LEDs with color temperatures from 5000 K to 7000 K and has luminous flux of 2160 lumens. The neutral white panel features Vishay's VLMW711T3U2US LEDs with color temperatures from 3800 K to 5000 K and has luminous flux of 1900 lumens.

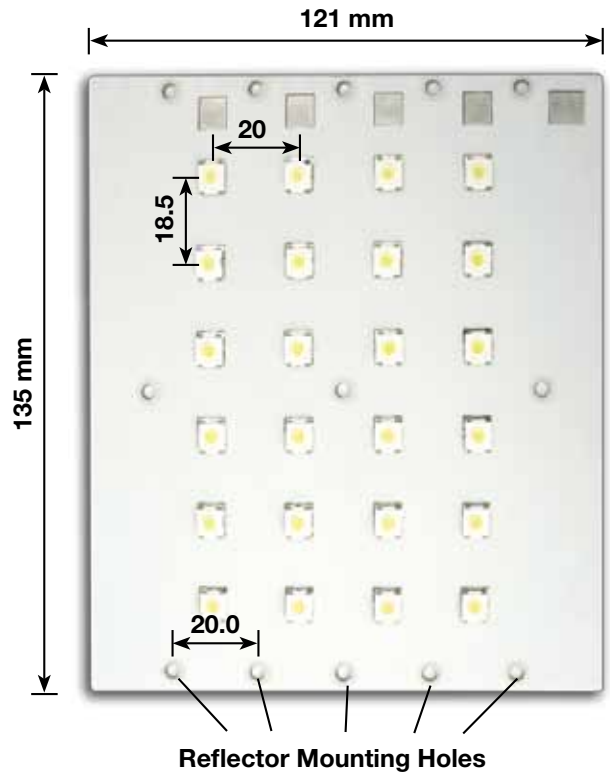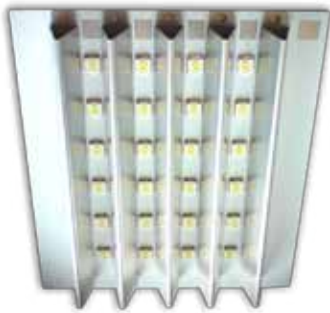


Reflectors: VLSL-REFL01

Aluminum alloy reflectors are provided to enable you to control the viewing angles and the pattern of illumination. As shown below, without reflectors the viewing angle is 120°. This viewing angle can be tightened to 55° with the use of the reflectors. Five reflectors are provided with each kit.

With reflectors, pattern is 55° x 120° oval

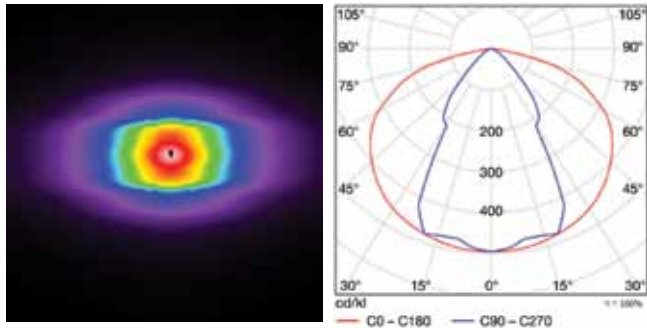


Without reflectors, pattern is ~120° cone

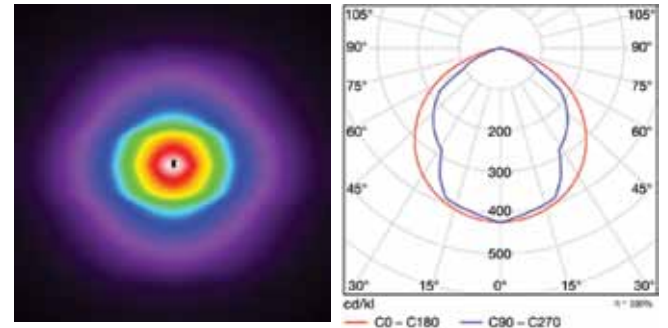

Driver: VLSSL3-DU

The LED Driver board provides power to one or two panels. It provides a constant current source to up to 8 strings of 6 LEDs. A 12-V DC source is required to power the driver. The board features undervoltage and overvoltage protection. The driver's operating temperature is from - 40 °C to + 105 °C. Every component on the board is AEC-Q101 qualified and, where possible, sourced from Vishay. Each kit comes with one driver module.

- DC input supply voltage: 12 V, typical (11 V to 16 V)
- Input current: 2 A, typical
- Output current, constant: 1.4 A (4 strings at 350 mA)
- Output voltage ($f \sum V_{f-string}$): 19.5 V, typical (18 V to 24 V)
- Maximum operating temperature: - 40 °C to + 105 °C
- Current source outputs ESD protected: > 30 kV, IEC 61000-4-2
- Standby current: 20 mA maximum at 25 °C
- RS232 digital interface
- Ambient light sensor input
 - Driver will adjust the pulse width modulation to one of four settings: 100 %, 75 %, 50 %, or 25 %

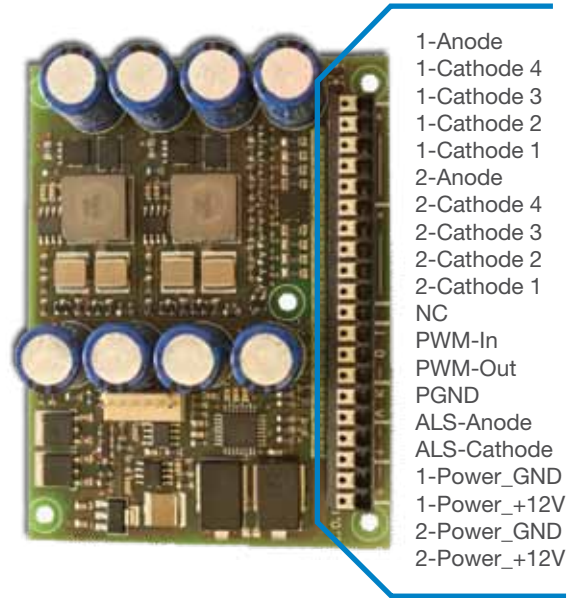

- 1-Anode
- 1-Cathode 4
- 1-Cathode 3
- 1-Cathode 2
- 1-Cathode 1
- 2-Anode
- 2-Cathode 4
- 2-Cathode 3
- 2-Cathode 2
- 2-Cathode 1
- NC
- PWM-In
- PWM-Out
- PGND
- ALS-Anode
- ALS-Cathode
- 1-Power_GND
- 1-Power_+12V
- 2-Power_GND
- 2-Power_+12V

Kit Ordering Information

Panel Part Number	Cool White VLSSL30	Natural White VLSSL31	Number of Panels	Number of Reflectors VLSSL-REFL01	Number of Drivers VLSSL3-DU
VLSSL30-LDK	√		1	5	1
VLSSL31-LDK		√			



DISCLAIMER All product specifications and data are subject to change without notice. Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications. Product names and markings noted herein may be trademarks of their respective owners.

SEMICONDUCTORS:

Rectifiers • High-Power Diodes and Thyristors • Small-Signal Diodes • Zener and Suppressor Diodes
• FETs • Optoelectronics • ICs • Modules

PASSIVE COMPONENTS:

Resistive Products • Magnetics • Capacitors



One of the World's Largest Manufacturers of
Discrete Semiconductors and Passive Components

WORLDWIDE SALES CONTACTS

THE AMERICAS

UNITED STATES

VISHAY AMERICAS
ONE GREENWICH PLACE
SHELTON, CT 06484
UNITED STATES
PH: +1-402-563-6866
FAX: +1-402-563-6296

ASIA

SINGAPORE

VISHAY INTERTECHNOLOGY ASIA PTE LTD.
37A TAMPINES STREET 92 #07-00
SINGAPORE 528886
PH: +65-6788-6668
FAX: +65-6788-0988

P.R. CHINA

VISHAY CHINA CO., LTD.
15D, SUN TONG INFOPORT PLAZA
55 HUAI HAI WEST ROAD
SHANGHAI 200030
P.R. CHINA
PH: +86-21-5258 5000
FAX: +86-21-5258 7979

JAPAN

VISHAY JAPAN CO., LTD.
SHIBUYA PRESTIGE BLDG. 4F
3-12-22, SHIBUYA
SHIBUYA-KU
TOKYO 150-0002
JAPAN
PH: +81-3-5466-7150
FAX: +81-3-5466-7160

EUROPE

GERMANY

VISHAY ELECTRONIC GMBH
GEHEIMRAT-ROSENTHAL-STR. 100
95100 SELB
GERMANY
PH: +49-9287-71-0
FAX: +49-9287-70435

FRANCE

VISHAY S.A.
199, BLVD DE LA MADELEINE
06003 NICE, CEDEX 1
FRANCE
PH: +33-4-9337-2727
FAX: +33-4-9337-2726

UNITED KINGDOM

VISHAY LTD.
SUITE 6C, TOWER HOUSE
ST. CATHERINE'S COURT
SUNDERLAND ENTERPRISE PARK
SUNDERLAND SR5 3XJ
UNITED KINGDOM
PH: +44-191-516-8584
FAX: +44-191-549-9556

Build **Vishay**
into your **Design**

www.vishay.com

VMN-PL0448-1005