


Resistance Welded Miniature Crystal Units



The XTUM-1 crystal unit is a miniature resistance welded package that provides excellent hermetic seal and frequency aging. The frequency range till 125 MHz and miniature size is ideal for communication equipment.

FEATURES

- Low cost
- Industry standard
- Small compact size
- Wide frequency range
- High stability
- “AT” cut crystal
- Compliant to RoHS directive 2002/95/EC


RoHS
COMPLIANT

STANDARD ELECTRICAL SPECIFICATIONS

PARAMETER	SYMBOL	CONDITION	UNIT	MIN.	TYP.	MAX.
Frequency range	F_O		MHz	10.000	-	125.000
Frequency tolerance	$\Delta F/F_O$	at 25 °C	ppm	-	± 10	± 50
Temperature stability	T_C	see Frequency Stability vs. Temperature Range	ppm	-	± 10	± 50
Operating temperature range	T_{OPR}		°C	-	-	-
Storage temperature range	T_{STG}		°C	- 40	-	+ 85
Shunt capacitance	C_0		pF	-	-	7
Load capacitance	C_L	customer specified	pF	10	-	series
Insulation resistance	I_R	100 V_{DC}	$M\Omega$	500	-	-
Drive level	D_L		μW	-	100	500
Aging	F_a	at 25 °C, per year	ppm	- 5	-	+ 5


EQUIVALENT SERIES RESISTANCE (ESR) AND MODE OF VIBRATION (MODE)

FREQUENCY RANGE (MHz)	MAX. ESR (Ω)	MODE	FREQUENCY RANGE (MHz)	MAX. ESR (Ω)	MODE
10.000 to 12.999	60	fundamental	40.000 to 59.999	50	fundamental
13.000 to 19.999	40	fundamental	60.000 to 79.999	50	3 rd overtone
20.000 to 29.999	30	fundamental	80.000 to 125.000	100	5 th overtone
30.000 to 39.999	60	fundamental			

FREQUENCY STABILITY VS. TEMPERATURE RANGE (25 °C \pm 3 °C)

TEMPERATURE RANGE (°C)	FREQUENCY STABILITY (ppm)					
	± 5	± 10	± 15	± 20	± 30	± 50
0 to 50	x	x	x	x	x	x
- 10 to 60	x	x	x	x	x	x
- 20 to 70		x	x	x	x	x
- 40 to + 85				x	x	x

DIMENSIONS in inches [millimeters]

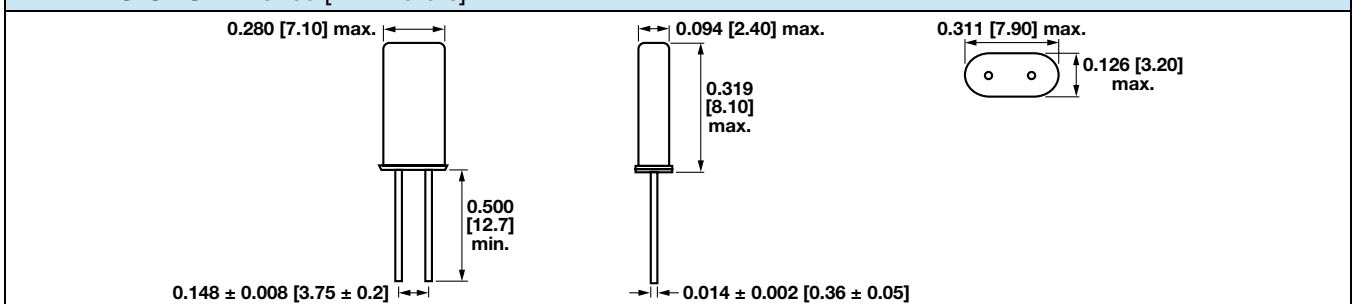



ORDERING INFORMATION			
XTUM1 MODEL	-18 LOAD blank = series -32 = 32 pF -18 = 18 pF standard	20M FREQUENCY/MHz	e2 JEDEC LEAD (Pb)-FREE STANDARD

GLOBAL PART NUMBER				
X	T	U	1	
MODEL				
	1	8		
	LOAD			
		A		
		PACKAGE CODE		
		N	A	
		OPTION		
		2	0	M
		FREQUENCY		

GLOBAL PART NUMBERING				
X	T	9	S	
MODEL NUMBER				
XT9S = XT49S XT9M = XT49M XTU1 = XTUM1				
	2	0		
	LOAD CAPACITANCE			
	18 = 18 pF 20 = 20 pF NL = series to be specified by customer			
		A		
		PACKAGE CODE		
		Tape and reel G = RF5 (XT9S) H = RF7 (XT9M)		
		Bulk A = B04 (all models)		
		N	A	
		OPTIONS		
		NA = no additional options RR = extended temperature of - 40 °C to + 85 °C Contact factory for all other options		
		4	0	M
		FREQUENCY		
		4M = 4 MHz 40M = 40 MHz 100M = 100 MHz 12M288 = 12.288 MHz M is used as decimal place holder in frequency		
Example: XT49S-20 40M				
X	T	3	6	
MODEL NUMBER				
XT46 = XT46C XT36 = XT36C				
	2	0		
	LOAD CAPACITANCE			
	18 = 18 pF 20 = 20 pF NL = series to be specified by customer			
		A		
		PACKAGE CODE		
		Tape and reel H = RF7		
		Bulk A = B04 (all models)		
		1	2	M
		FREQUENCY		
		4M = 4 MHz 40M = 40 MHz 100M = 100 MHz 12M288 = 12.288 MHz M is used as decimal place holder in frequency		
Example: XT36C-20 12M				



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.