

29C1

HIGH VACUUM CONTROL DIODE
 Directly heated tungsten filament—for use as the
 controlling element in stabiliser circuits

RATING

Approximate Filament Voltage (volts)	V_f	4.0
Approximate Filament Current (amps)	I_f	0.8
Maximum Anode Current (mA)	$I_{a(max)}$	3.0
Maximum Anode Voltage (volts)	$V_{a(max)}$	100

DIMENSIONS

Maximum Overall Length (mm)	80
Maximum Diameter (mm)	32
Maximum Seated Height (mm)	67
Approximate Nett Weight (ozs)	1½
Approximate Packed Weight (ozs)	2½

MOUNTING POSITION - Unrestricted.

29C1

HIGH VACUUM CONTROL DIODE


Directly heated tungsten filament—for use as the controlling element in stabiliser circuits

TYPICAL OPERATION

Saturated Anode Current (mA)	I_a	2.0
Minimum Anode Voltage (volts)	$V_{a(\min)}$	20
Approximate Filament voltage (volts)	V_f	4.0
Approximate Filament current (amps)	I_f	0.8

BULB Clear

BASE International Octal (IO8)



Viewed from free end of pins.

CONNEXIONS


Pins 1, 2, 4	Filament	f
Pin 3	Blank	-
Pin 5	Anode	a
Pins 6, 7, 8	Filament	f

29C1

HIGH VACUUM CONTROL DIODE

Directly heated tungsten filament—for use as the controlling element in stabiliser circuits

AVERAGE CHARACTERISTIC CURVES: I_a/V_f

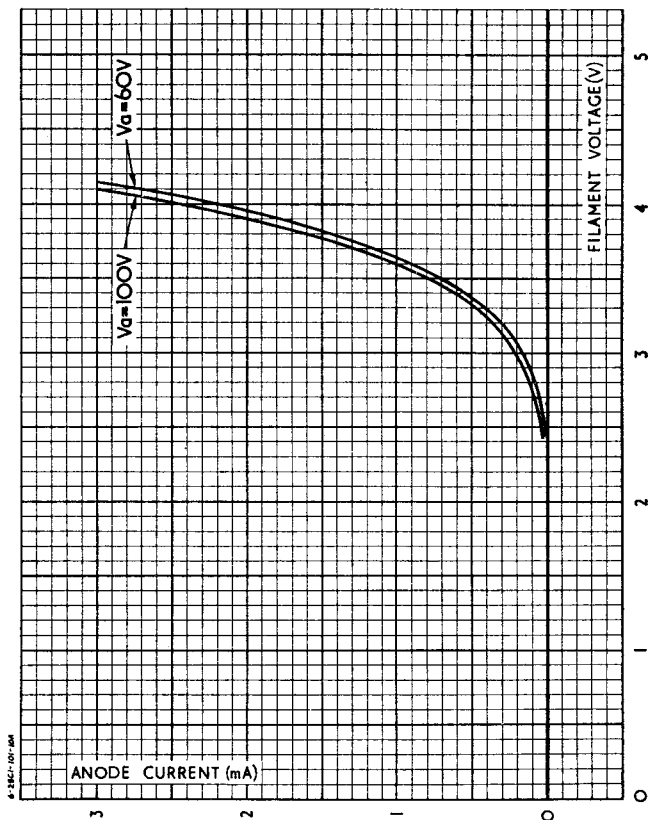

29C1

HIGH VACUUM CONTROL DIODE

Directly heated tungsten filament—for use as the controlling element in stabiliser circuits

AVERAGE CHARACTERISTIC CURVES: I_a/I

