



C3J/5632

## XENON THYRATRON

NEGATIVE-CONTROL TRIODE TYPE

C3J

## GENERAL DATA


## Electrical:

Filament, Coated and Mid-tapped:	Min.	Ave.	Max.	
Voltage between pins 1 and 4 . . . . .	2.4	2.5	2.6	ac or dc volts
Current at 2.5 volts. . . . .	7	9	11	amp
Minimum heating time prior to tube conduction . . . . .			30	sec
Direct Interelectrode Capacitances (Approx.):				
Grid to anode . . . . .			2	$\mu\text{uf}$
Grid to cathode . . . . .			14	$\mu\text{uf}$
Maximum Deionization Time . . . . .			1000	$\mu\text{sec}$
Maximum Critical Grid Current . . . . .			10	$\mu\text{amp}$
Anode Voltage Drop:				
Average, at beginning of life . . . . .			10	volts
Maximum, at end of life . . . . .			14	volts
Maximum Commutation Factor, averaged over first 350 volts of inverse anode voltage rise. . . . .			0.66	$\text{va}/\mu\text{s}^2$
Grid Control Ratio (Approx.):				
For conditions: 10000-ohm grid resistor, circuit returns to filament mid-tap, dc anode voltage, and dc grid voltage. . . . .			200	

## Mechanical:

Mounting Position . . . . .		Any
Maximum Overall Length. . . . .		6"
Maximum Diameter. . . . .		1-9/16"
Weight (Approx.). . . . .		3 oz
Cap . . . . .	Medium	(JETEC No.C1-5)
Bulb. . . . .	T-12	
Base. . . . .	Medium-Metal-Shell Small 4-Pin with Bayonet	(JETEC No.A4-89)
Basing Designation for BOTTOM VIEW. . . . .		4CF

Pin 1-Filament  
Pin 2-Filament  
Mid-Tap &  
Circuit  
Returns



Pin 3-Grid  
Pin 4-Filament  
Cap-Anode

## GRID-CONTROLLED RECTIFIER SERVICE

## Maximum Ratings, Absolute Values:

## PEAK ANODE VOLTAGE:

Forward . . . . .	900	max. volts
Inverse . . . . .	1250	max. volts

Defined as the product of the rate of current decay in amperes per microsecond just before conduction ceases and the rate of inverse voltage rise in volts per microsecond following current conduction.



C3J/5632

## XENON THYRATRON

## GRID VOLTAGE:

Peak, before tube conduction . . . . . -100 max. volts

## ANODE CURRENT:

Peak. . . . . 30 max. amp

Average. . . . . 2.5 max. amp

Overload:

Rating I\*, for 0.37 sec. . . . . 30 max. amp

duration of . . . 0.50 sec. . . . . 22.5 max. amp

Rating II\*\*, for 1 sec. . . . . 11.25 max. amp

duration of . . . 2 sec. . . . . 5.63 max. amp

Rating III\*\*\*, for 3 sec. . . . . 3.75 max. amp

duration of . . . 4 sec. . . . . 2.82 max. amp

Rating IV\*\*\*\*, for 3 sec. . . . . 3.75 max. amp

duration of . . . 4 sec. . . . . 3.40 max. amp

Rating V\*\*\*\*\*, for 4.5 sec. . . . . 3.30 max. amp

Fault, for duration of 0.1 second maximum . . . . . 300 max. amp

AMBIENT-TEMPERATURE RANGE . . . . . -55 to +75 °C

● Averaged over any period of 4.5 seconds.

\* Averaged over duration of overload occurring no more than once in any period of 4.5 seconds.

\*\* Averaged over duration of overload occurring no more than once in any period of 30 seconds.

## OPERATING CONSIDERATIONS

*Circuit returns* should be connected to filament mid-tap (pin 2).

The *anode* of the C3J/5632 may show a red color when the tube is operated at full load.


Sufficient *anode-circuit resistance*, including the tube load, must be used under any conditions of operation to prevent exceeding the current ratings of the tube.



C3J

C3J/5632

## XENON THYRATRON

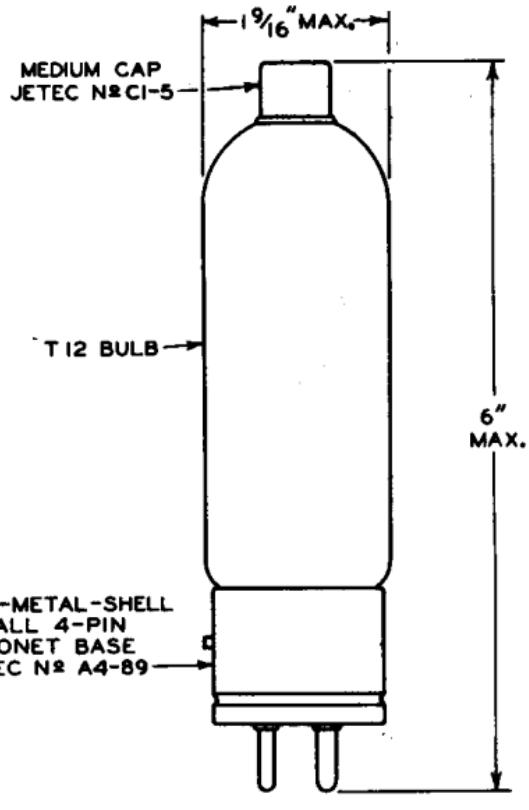

C3J



C3J/5632

## XENON THYRATRON

OPERATIONAL RANGE  
OF CRITICAL GRID VOLTAGE

RANGE IS FOR CONDITIONS WHERE:  
 $E_f = 2.5 \text{ VOLTS} \pm 5\%$ ; CIRCUIT RE-  
 TURNS AND PIN 2 CONNECTED TO  
 FILAMENT TRANSFORMER CENTER-  
 TAP. THE RANGE INCLUDES INITIAL  
 AND LIFE VARIATIONS OF INDIVIDUAL  
 TUBES. GRID RESISTOR = 0 TO 10000  
 OHMS. AMBIENT TEMPERATURE RANGE  
 $= -55 \text{ TO } 75^\circ\text{C}$ .

