



Coaxial Repeater Pentode

5A/152M

CATHODE.

Indirectly heated Oxide coated

Voltage	6.3	V
Nominal current	0.47	A

RATING.

Mutual conductance (at I_a 10mA)	7.5	mA/V
------------------------------------	-----	------

INTER-ELECTRODE CAPACITIES.

Grid to anode	0.018	pF
Input	10	pF
Output	5	pF

DIMENSIONS.

Maximum overall length	80.2	mm.
Maximum seated height	66.7	mm.
Maximum diameter	30.15	mm.
Net weight	28.5	grms.

MAXIMUM RATINGS.

Maximum direct anode voltage	250	V
Maximum direct screen voltage	150	V
Maximum direct screen current	5	mA
Maximum anode dissipation	5	W
Equivalent noise resistance	670	Ω

5A/152M

Coaxial Repeater Pentode

5A/152M




TYPICAL OPERATING CONDITIONS.

Direct anode voltage	250	V
Direct anode current	10	mA
Direct screen voltage	150	V
Direct screen current	2	mA
Direct suppressor voltage	0	V
Load impedance	6,000	Ω
Power output	50	mW
Distortion	<5	%



Coaxial Repeater Pentode

5A/152M

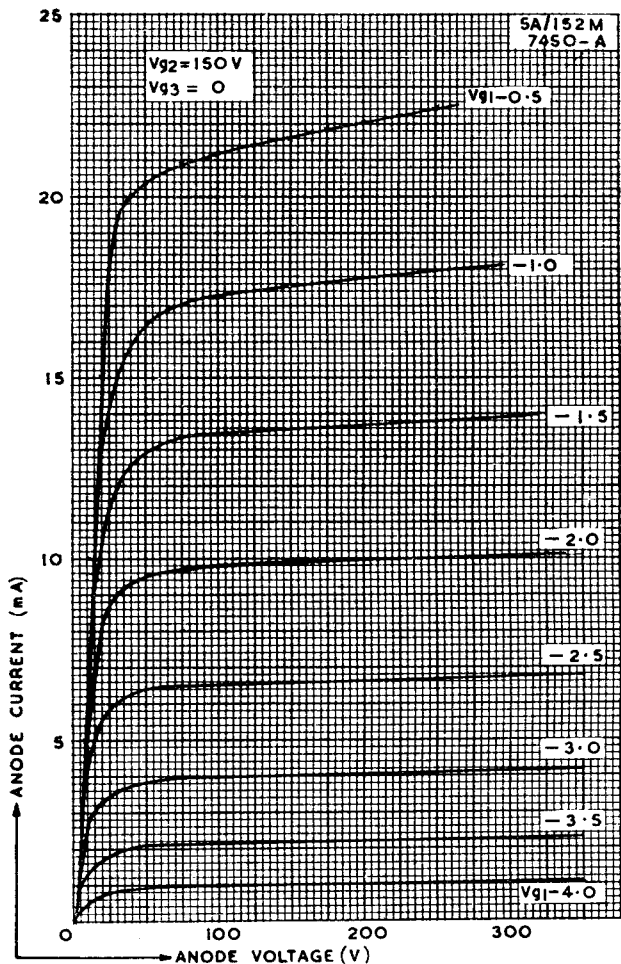


5A/152M

Coaxial Repeater Pentode





5A/152M

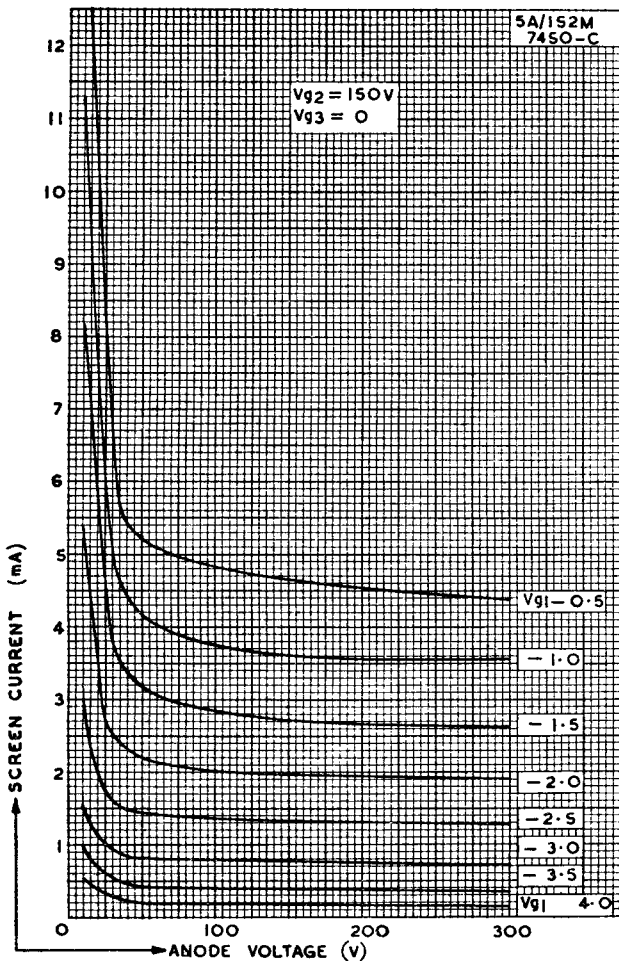



Coaxial Repeater Pentode

5A/152M

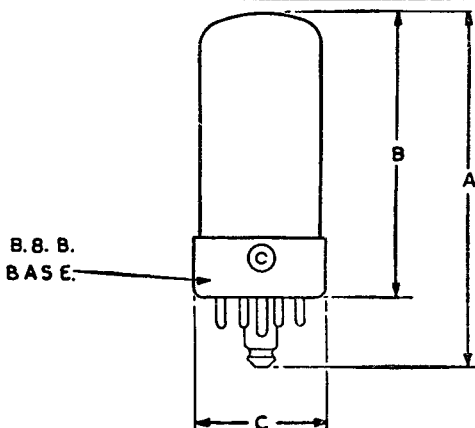

BASING

- | | |
|---|---------|
| 1 | HEATER |
| 2 | ANODE |
| 3 | GRID 2 |
| 4 | GRID 3 |
| 5 | SHIELDS |
| 6 | GRID 1 |
| 7 | CATHODE |
| 8 | HEATER |

DIM	MILLIMETRES	INCHES
A	80.2 MAX	3 5/32 MAX
B	66.7 MAX	2 5/8 MAX
C	30.15 MAX	1 3/16 MAX

NOTE. BASIC FIGURES ARE INCHES