



PACKAGING

Overview of Microchip Die/Wafer Support

INTRODUCTION

Microchip Technology Inc. devices are available in wafer form and in die form. All products sold in die or wafers have been characterized and qualified according to the requirements of Microchip Technology Inc. Specifications SPI-41014, "Characterization and Qualification of Integrated Circuits," and QCI-39000, "World-wide Quality Conformance Requirements."

PRODUCT INTEGRITY

Product supplied in die or wafer form are fully tested and characterized. Die or Wafers are inspected to Microchip Technology Inc. Specification, QCI-30014.

CAUTION

Some EEPROM devices use EPROM cells for device configuration. Exposure to ultra-violet light must be avoided. Exposure to ultra-violet light may cause the device to operate improperly.

Extreme care is urged in the handling and assembly of these products since they are susceptible to damage from electro-static discharge.

ORDERING INFORMATION

Die sales must be conducted by contacting your Microchip Sales Office.

To order or obtain information (on pricing or delivery) for a specific device, use one of the following part numbers:

Devices in Waffle Pack
DEVICE_NUMBER/S

Devices in Wafer form
DEVICE_NUMBER/W
DEVICE_NUMBER/WF

where DEVICE_NUMBER is the device that you require. The S specifies die in a waffle pack while a W specifies wafer sales, and WF specifies sawn wafer on frames.

ELECTRICAL SPECIFICATIONS

The functional and electrical specifications of Microchip devices in die form are identical to those of a packaged version. Please refer to individual data sheets for complete details.

QTP

Quick Turnaround Production (QTP) applies only to EPROM and EEPROM microcontrollers.

With QTP devices, the program memory array is only tested against the code provided. This method ensures that the device will operate correctly as programmed, but does not ensure that every program memory bit can be programmed to every state.

Note: Do not erase QTP devices and program them with a different code.

EPROM

EPROM devices are supplied as fully erased programmable parts that are UV erasable and re-programmable by the user (except for QTP and SQTP devices).

EEPROM

EEPROM devices may not be supplied in a fully erased state, but are re-programmable by the user (except for QTP and SQTP devices).

ROM

ROM devices are supplied as fully programmed parts (program memory only). These are not reprogrammable by the user.

DIE MECHANICAL SPECIFICATIONS


Refer to the individual data sheet for these specifications.

Packaging

BOND PAD COORDINATES

The die figures have associated bond pad coordinates. These coordinates assist in the attaching of the bond wire to the die. All the dimensions of these coordinates are in micrometers (μm) unless otherwise specified. The origin for the coordinates is the center of the die, as shown in Figure 1. Refer to the Microchip Die Specification sheet for openings and pitch.

FIGURE 1: DIE COORDINATE ORIGIN

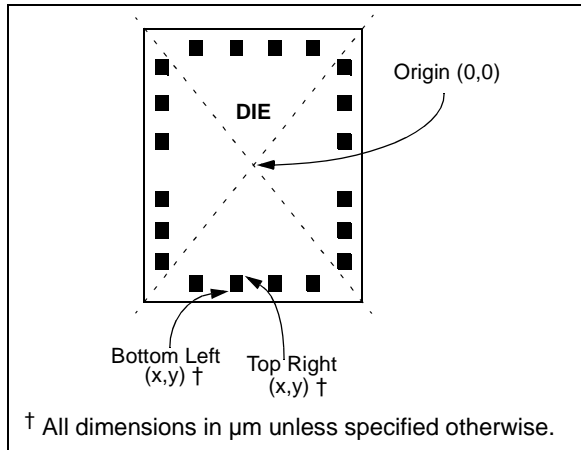

The die is capable of thermosonic gold or ultrasonic wire bonding. Die meet the minimum conditions of MIL-STD 883, Method 2011 on "Bond Strength (Destructive Bond Pull Test)". The Bond Pad metallization is silicon doped aluminum.

SUBSTRATE BONDING

Substrate bonding may be required on certain product families. For more information refer to the die specification sheet.

SHIPPING OPTIONS

DIE Form Shipping

Microchip product in die form can be shipped in waffle-pack. The waffle pack has sufficient cavity area to restrain the die, while maintaining their orientation. Lint free paper inserts are placed over the waffle packs, and each pack is secured with a plastic locking clip. Groups of waffle packs are assembled into sets for shipment. A label with lot number, quantity, and part number is attached.

These waffle packs are hermetically sealed in bags.

Wafer Form

Products may also be shipped in wafer form (see ordering information). Wafers are shipped in a wafer tub. The tub is padded with non-conductive foam. Lint free paper inserts are placed around each wafer. A label with lot number, quantity, and part number is attached.

Sawn Wafer on Frames

Products may also be shipped on wafer frames. Wafers are mounted on plastic frames and 100% sawn through. Sawn wafer on frames may be shipped in bulk (25 wafers per carrier) or in a single wafer in a carrier. A label with lot number, quantity, and part number is attached with each shipment.

Storage Procedures

Temperature and humidity greatly affect the storage life of die. It is recommended that the die be used as soon as possible after receipt.

Upon receipt, the sealed bags should be stored in a cool and dry environment (25°C and 25% relative humidity). In these conditions, sealed bags have a shelf life of 12 months. Temperatures or humidities greater than these will reduce the storage life.

Once a bag containing waffle packs has been opened, the devices should be assembled and encapsulated within 48 hours (assuming, 25°C and 25% humidity).

NOTES:



MICROCHIP

WORLDWIDE SALES AND SERVICE

AMERICAS

Corporate Office

Microchip Technology Inc.
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 602-786-7200 Fax: 602-786-7277
Technical Support: 602 786-7627
Web: <http://www.microchip.com>

Atlanta

Microchip Technology Inc.
500 Sugar Mill Road, Suite 200B
Atlanta, GA 30350
Tel: 770-640-0034 Fax: 770-640-0307

Boston

Microchip Technology Inc.
5 Mount Royal Avenue
Marlborough, MA 01752
Tel: 508-480-9990 Fax: 508-480-8575

Chicago

Microchip Technology Inc.
333 Pierce Road, Suite 180
Itasca, IL 60143
Tel: 630-285-0071 Fax: 630-285-0075

Dallas

Microchip Technology Inc.
14651 Dallas Parkway, Suite 816
Dallas, TX 75240-8809
Tel: 972-991-7177 Fax: 972-991-8588

Dayton

Microchip Technology Inc.
Two Prestige Place, Suite 150
Miamisburg, OH 45342
Tel: 937-291-1654 Fax: 937-291-9175

Detroit

Microchip Technology Inc.
42705 Grand River, Suite 201
Novi, MI 48375-1727
Tel: 248-374-1888 Fax: 248-374-2874

Los Angeles

Microchip Technology Inc.
18201 Von Karman, Suite 1090
Irvine, CA 92612
Tel: 714-263-1888 Fax: 714-263-1338

New York

Microchip Technology Inc.
150 Motor Parkway, Suite 202
Hauppauge, NY 11788
Tel: 516-273-5305 Fax: 516-273-5335

San Jose

Microchip Technology Inc.
2107 North First Street, Suite 590
San Jose, CA 95131
Tel: 408-436-7950 Fax: 408-436-7955

AMERICAS (continued)

Toronto

Microchip Technology Inc.
5925 Airport Road, Suite 200
Mississauga, Ontario L4V 1W1, Canada
Tel: 905-405-6279 Fax: 905-405-6253

ASIA/PACIFIC

Hong Kong

Microchip Asia Pacific
RM 3801B, Tower Two
Metroplaza
223 Hing Fong Road
Kwai Fong, N.T., Hong Kong
Tel: 852-2-401-1200 Fax: 852-2-401-3431

India

Microchip Technology Inc.
India Liaison Office
No. 6, Legacy, Convent Road
Bangalore 560 025, India
Tel: 91-80-229-0061 Fax: 91-80-229-0062

Japan

Microchip Technology Intl. Inc.
Benex S-1 6F
3-18-20, Shinyokohama
Kohoku-Ku, Yokohama-shi
Kanagawa 222-0033 Japan
Tel: 81-45-471-6166 Fax: 81-45-471-6122

Korea

Microchip Technology Korea
168-1, Youngbo Bldg. 3 Floor
Samsung-Dong, Kangnam-Ku
Seoul, Korea
Tel: 82-2-554-7200 Fax: 82-2-558-5934

Shanghai

Microchip Technology
RM 406 Shanghai Golden Bridge Bldg.
2077 Yan'an Road West, Hong Qiao District
Shanghai, PRC 200335
Tel: 86-21-6275-5700 Fax: 86 21-6275-5060

ASIA/PACIFIC (continued)

Singapore

Microchip Technology Singapore Pte Ltd.
200 Middle Road
#07-02 Prime Centre
Singapore 188980
Tel: 65-334-8870 Fax: 65-334-8850

Taiwan, R.O.C

Microchip Technology Taiwan
10F-1C 207
Tung Hua North Road
Taipei, Taiwan, ROC
Tel: 886-2-2717-7175 Fax: 886-2-2545-0139

EUROPE

United Kingdom

Arizona Microchip Technology Ltd.
505 Eskdale Road
Winnersh Triangle
Wokingham
Berkshire, England RG41 5TU
Tel: 44-1189-21-5858 Fax: 44-1189-21-5835

France

Arizona Microchip Technology SARL
Zone Industrielle de la Bonde
2 Rue du Buisson aux Fraises
91300 Massy, France
Tel: 33-1-69-53-63-20 Fax: 33-1-69-30-90-79

Germany

Arizona Microchip Technology GmbH
Gustav-Heinemann-Ring 125
D-81739 München, Germany
Tel: 49-89-627-144 0 Fax: 49-89-627-144-44

Italy

Arizona Microchip Technology SRL
Centro Direzionale Colleoni
Palazzo Taurus 1 V. Le Colleoni 1
20041 Agrate Brianza
Milan, Italy
Tel: 39-39-6899939 Fax: 39-39-6899883

9/8/98



Microchip received ISO 9001 Quality System certification for its worldwide headquarters, design, and wafer fabrication facilities in January, 1997. Our field-programmable PICmicro[®] 8-bit MCUs, Serial EEPROMs, related specialty memory products and development systems conform to the stringent quality standards of the International Standard Organization (ISO).

All rights reserved. © 1998 Microchip Technology Incorporated. Printed in the USA. 10/98 Printed on recycled paper.

Information contained in this publication regarding device applications and the like is intended for suggestion only and may be superseded by updates. No representation or warranty is given and no liability is assumed by Microchip Technology Incorporated with respect to the accuracy or use of such information, or infringement of patents or other intellectual property rights arising from such use or otherwise. Use of Microchip's products as critical components in life support systems is not authorized except with express written approval by Microchip. No licenses are conveyed, implicitly or otherwise, under any intellectual property rights. The Microchip logo and name are registered trademarks of Microchip Technology Inc. in the U.S.A. and other countries. All rights reserved. All other trademarks mentioned herein are the property of their respective companies.