


ScopeMeter Lab Scope Accessories




STL90 Shielded Test Lead Set

Deluxe shielded, 1:1, silicone insulated test lead set. Standard with 98. Includes 1 Red and 1 Grey lead with ground leads; red, black and grey 2 mm probes, backprobe adapters and 4 mm breakout box adapters.

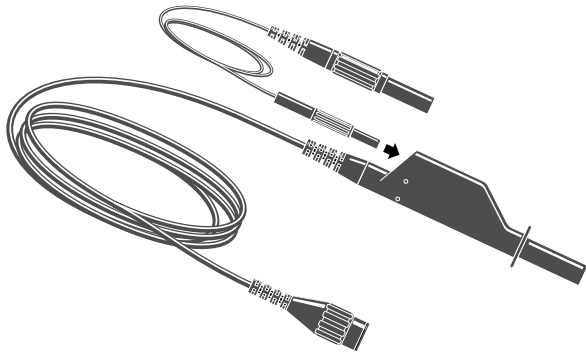

TR90 Automotive Temperature Probe (32°F to 400°F)


Flexible thermocouple designed to measure oil temperature through the dipstick tube. Resistive type.

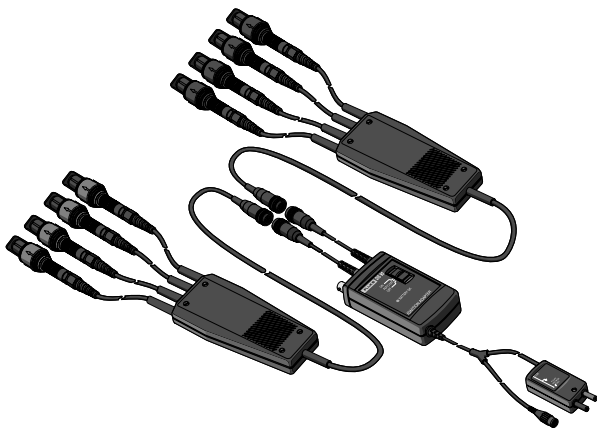

DIS90/801 Distributorless Ignition Parade Adapter

Allows single cylinder or parade display for vehicles with distributorless ignition systems. Requires Fluke 98 Series II Automotive ScopeMeter with version 2.70 firmware or later.

RPM/Trigger

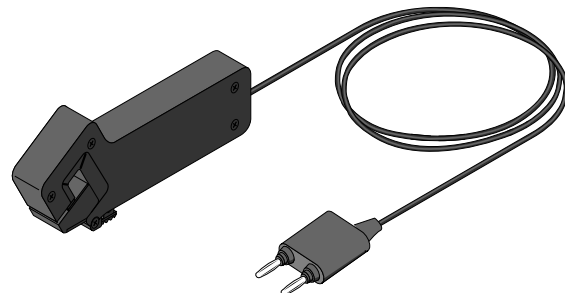

RPM90 Inductive Pick-Up/ External Trigger

Standard with the 98. Can be used as an external trigger for 97/AUTO



CAP90-2 Capacitive Secondary Pickup

Includes parade adapters to work on GM HEI, Nippondenso and Toyota ignition systems.

Software



SW98W FlukeView For Windows

Transfer waveforms to and from an IBM-compatible PC running Windows. Features a database section for cataloging waveforms by user definable fields such as make, model year, engine, signal type. Includes PM9080/001 optically isolated RS-232 interface adapter. For the 98 only. System requirements: IBM PC compatible, EGA or VGA, Windows 3.1 or higher, minimum 470 KB RAM, mouse, RS-232 port.