

Handheld Optical Fault Finder


TFS2020 FiberScout®



Features

FiberScout

- Simple Symbolic Display
 - Graphics
 - Event Descriptions
- Fast Restoration Capability
- Small, Lightweight, Easy to Handle
- Easy One-button Operation
- Low Cost – High Performance
- Long Range
- Multimode Short Range
- Dual Port Capability
- High Distance Accuracy
- User-selectable Fault Thresholds
- Internal Battery Operation
- Internal Test Result Storage
- RS-232C Output Port: PC Interface, Seiko DPU-201G Printer, Seiko DPU-411 Printer
- PC Interface Software
- Rackmount Available

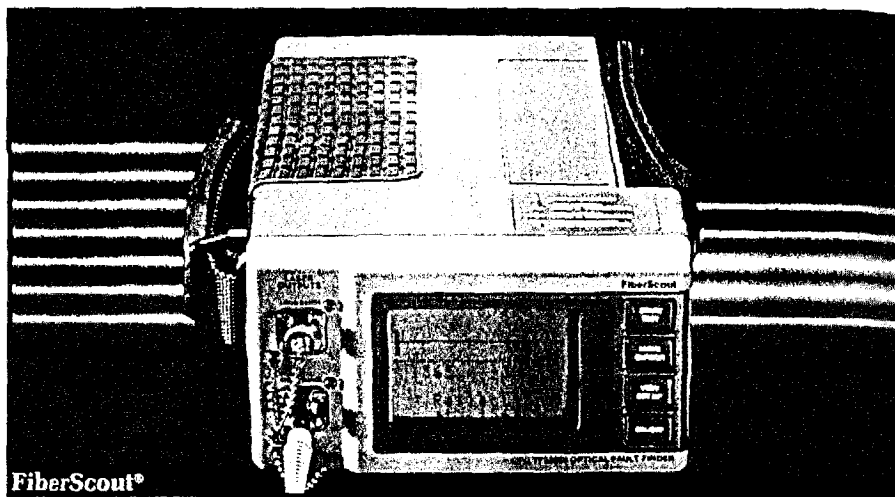

FiberScout Handheld Optical Fault Finder

Weighing just five pounds (2.3 kg), the battery-operated Tektronix TFS2020 FiberScout reports the status of the fiber through four easy-to-understand symbols.

Designed to locate events and faults in optical cable, the FiberScout is priced for widespread use in the cable restoration environment.

No waveform interpretation is necessary – making the FiberScout so simple to use, it allows fault finding by virtually any user, regardless of the person's level of training.

The FiberScout gives you faster restoration capability and greater service staff effectiveness, since it can be deployed in far greater numbers than the more complex, more expensive OTDRs.

Documentation is fast and simple when using either of the lightweight, portable Seiko thermal printers. FiberScout comes standard with non-volatile memory for internal storage of test results which can later be transferred to a PC.

For advanced documentation and storage needs, we also offer the FSTIP test interface package. Files are saved to the PC in ASCII form, which allows easy analysis of the representative trace and annotations of the results through virtually any word processor.

For your local Tektronix representative see the list in the back of this catalog or outside the U.S. call: 1-503-627-1933, inside the U.S. call: 1-800-426-2200.



See Tektronix on the World Wide Web:
<http://www.tek.com>



ISO 9001 Tektronix Measurement products are manufactured in ISO registered facilities.

Handheld Optical Fault Finder

TFS2021 FiberScout®

CHARACTERISTICS

OPERATING PERFORMANCE*1

| | Multimode Short Range | Long Range |
|-----------------------------------|--|-------------------------|
| Operating Distance Range*2 | ≥3.0 km @ 3.5 dB/km | ≥40.0 km @ 0.4 dB/km |
| Fault Detection Range (one way) | ≥10.5 dB @ 62.5 μm | ≥16 dB*3 |
| Distance Measurement Accuracy*4 | | |
| To Reflective Event | ±2 meters | ±5 meters |
| To Non-reflective Event | ±2 meters | ±5 to 20 meters*5 |
| Distance Readout Resolution | 1 meter or 1 foot | 1 meter or 1 foot |
| Two Event Resolution*6 | | |
| Distance to Detect 2nd Reflection | ≤10 meters | ≤40 meters |
| Loss Measurement Repeatability | ±0.2 dB | ±0.3 dB |
| Loss Readout Resolution | ±0.1 dB | ±0.1 dB |
| Fault Threshold Selections | 1, 2, 3, or 4 dB | 1, 2, 3, or 4 dB*7 |
| Optical Output Wavelength | 835 nm ±35 nm | 1300 nm ±25 nm |
| Output Core Size | 50 or 62.5 microns | 8 to 10 microns |
| Display | Backlit LCD, Graphics and Text | |
| Laser Safety | Complies with Class I, 21 CFR 1040.10/1040.11 | |
| Power | Internal Rechargeable NiCad Battery Pack. Typical operation life between charges: 6 hours. Typical shelf life between charges: 6 months. External AC/DC External Power/Charger Adapter. | |

*1 In some cases, varying test conditions may affect measurement performance.

*2 With no events present.

*3 At the 4 dB fault threshold setting.

*4 Actual distance accuracy includes: timebase accuracy (±0.005%) quantization error in the Index of Refraction setting.

*5 With extended averaging invoked.

*6 The FiberScout automatically uses the optimal pulse width to separate the loss measurements between two adjacent events.

*7 For singlemode fiber, the FiberScout will report any loss ≥1 dB. For multimode fiber, the FiberScout will report any significant fault.

ORDERING INFORMATION

For price information: Outside the U.S. contact your local Tektronix representative, inside the U.S. see the price list in the back of this catalog.

FiberScout

Handheld Optical Fault Finder. Order TFS2020.

Includes: Battery Pack (146-1000-01); 110 V AC/DC, Power Supply – USA/Canada (119-2731-00); Travel Case (016-1024-00); Accessory Pouch (016-0993-00); Operator Manual and Supplement (070-7167-04); Reference Label (062-9360-01).

With each FiberScout ordered, select one of the option groups listed below:

Opt. 02 – Equip with Long Range Port.

Opt. 09 – Equip with Multimode (62.5 μm) Short Range Port.

Opt. MC – Equip with Multimode (50 μm) Short Range Port.

Opt. MM – Equip with Long Range and Multimode (62.5 μm) Short Range Ports.

Opt. MN – Equip with Long Range and Multimode (50 μm) Short Range Ports.

With each FiberScout ordered, select one of the connector options:

CONNECTOR OPTIONS – LONG RANGE

Opt. 20 – Biconic.

Opt. 21 – FC.

Opt. 22 – D4.

Opt. 24 – ST.

Opt. 25 – DIN.

Opt. 28 – SC.

CONNECTOR OPTIONS – MULTIMODE SHORT RANGE

Opt. 40 – Biconic.

Opt. 41 – FC.

Opt. 42 – D4.

Opt. 44 – ST.

Opt. 45 – DIN.

Opt. 46 – SMA 905/906.

Opt. 48 – SC.

AC/DC POWER SUPPLY OPTIONS

The FiberScout is equipped for use in the U.S.A. and Canada. If use is for other than in the U.S.A. or Canada, order one of the following options:

Opt. 1C – 220 V AC/DC Power Supply (Europe).

Opt. 2C – 240 V AC/DC Power Supply (UK).

SERVICE ASSURANCE OPTIONS

REP4400 – Provides one year of post-warranty Repair Protection.

CAL4400 – Provides one year of Calibration Services.

Note: Units are not modular or customer modifiable. Any change in capability from originally ordered configuration, if available, must be performed by the factory or authorized Tektronix service center. Additional charges will apply.

For your local Tektronix representative see the list in the back of this catalog or outside the U.S. call: 1-503-627-1933, inside the U.S. call: 1-800-426-2200.



See Tektronix on the World Wide Web:
<http://www.tek.com>



Tektronix Measurement products are manufactured in ISO registered facilities.