

LOCAL  
OUT

RIT  
FM

VCO


SWR  
CAL  
MOD  
S/R  
CW KEY

UP  
DOWN  
PTT

BEEP  
MUTE  
SRV  
TV

- NOTES
1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. IN KILO OHMS, M=MEG OHMS
  2. RESISTOR WATTAGES ARE 1/8W UNLESS OTHERWISE NOTED.
  3. CAPACITANCE VALUES ARE INDICATED IN MICRO FARADS UNLESS OTHERWISE NOTED. (P=PICO-MICRO FARAD)
  4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE ZF UNLESS OTHERWISE NOTED.
  5. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE SL (LESS THAN 1000PF) OR ZF (MORE THAN 1000PF) UNLESS OTHERWISE NOTED.
  6. CHIP PARTS ARE NOT SPECIFIED IN THIS SCHEMATIC DIAGRAM. PLEASE REFER TO THE PARTS LIST FOR THE CHIP PARTS.

Downloaded by  
RadioAmateur.EU

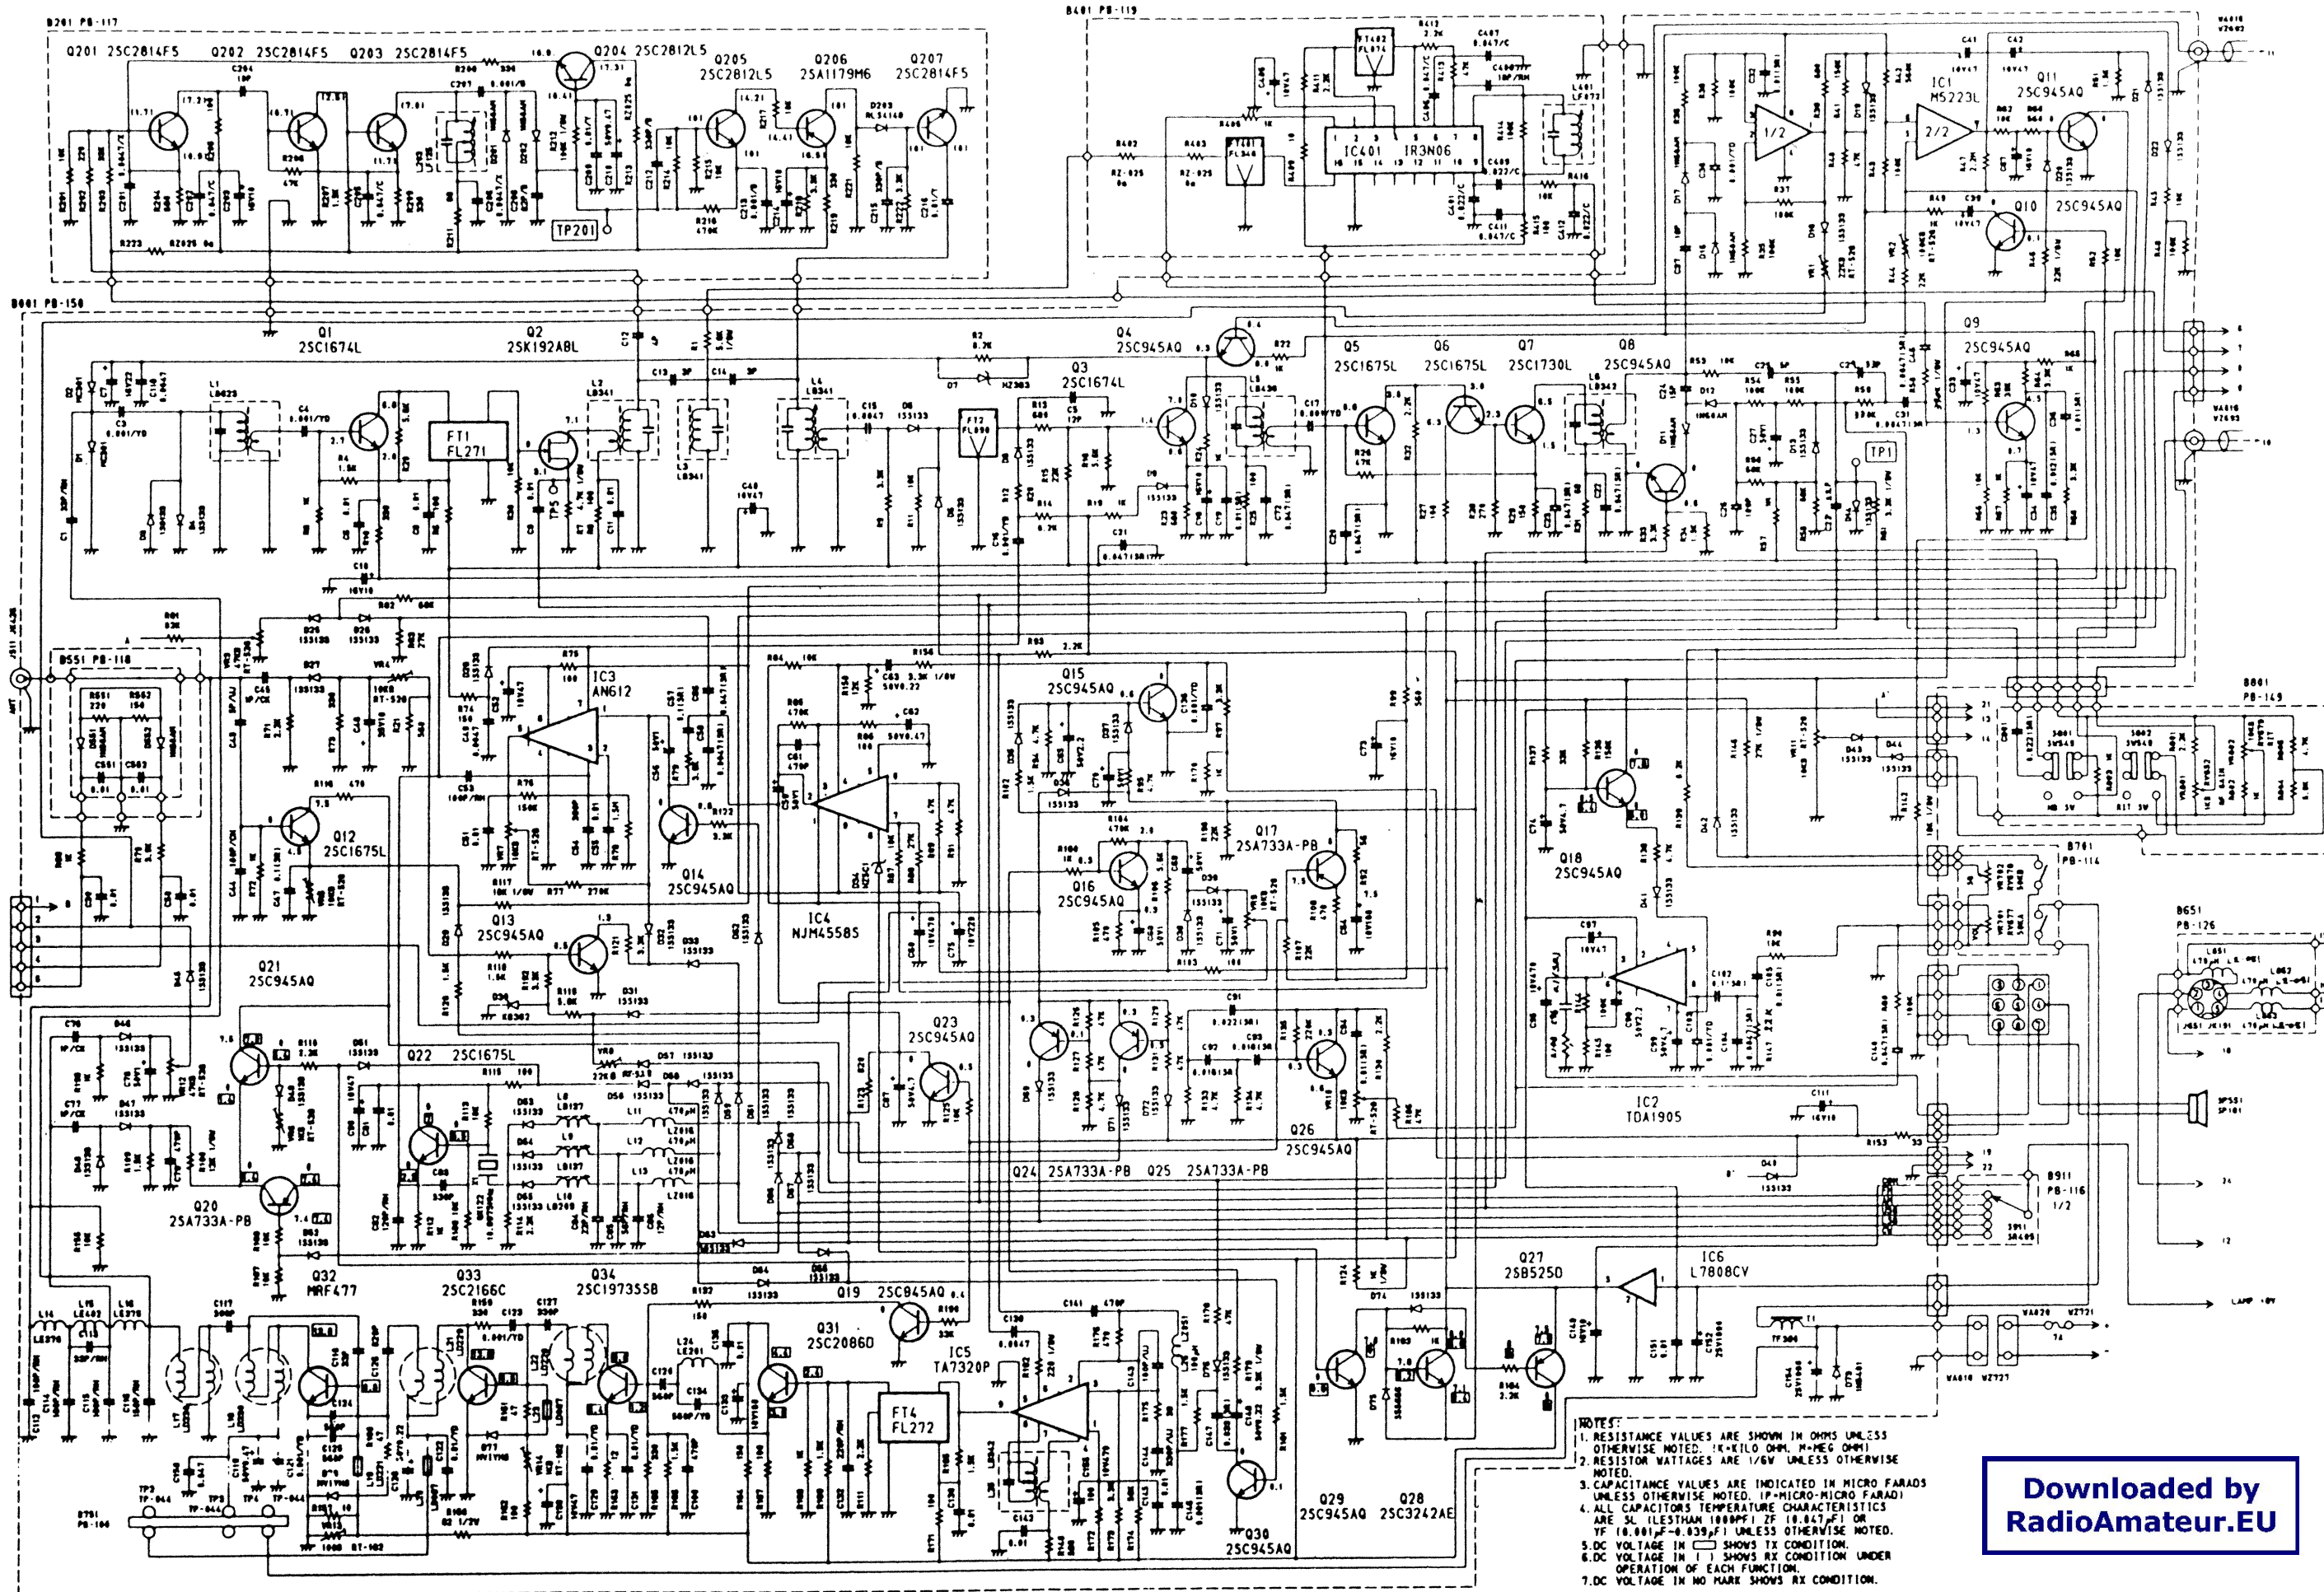

- NOTES:
1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K-KILO OHM, M-MEG OHM)
  2. RESISTOR WATTAGES ARE 1/6W UNLESS OTHERWISE NOTED.
  3. CAPACITANCE VALUES ARE INDICATED IN MICRO FARADS UNLESS OTHERWISE NOTED. (P-MICRO-MICRO FARAD)
  4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE 5% (LESTHAN 100PF) 2% (10.0KPF) OR 1% (10.0KPF-4.039F) UNLESS OTHERWISE NOTED.
  5. DC VOLTAGE IN ( ) SHOWS TX CONDITION.
  6. DC VOLTAGE IN ( ) SHOWS RX CONDITION UNDER OPERATION OF EACH FUNCTION.
  7. DC VOLTAGE IN NO MARK SHOWS RX CONDITION.

Downloaded by  
RadioAmateur.EU