

electrical measurements

10 000 points

ICO 51



The function of measurement and range, as well as put on a specific scale are programmable. The parameters thus configured are protected against all inopportune modifications

- Format 72 x 24 mm
- Function, ranges and scale programmable
- Configurable on site

functions

Measure

The ICO 51 allow upto measurements of A.C/D.C 400 V (true effective value with or without component continuous health) and measurements of A.C/D.C current (up to 5 A) using small shunt screwed on the back connector block.

Automatic ranging.....

This function allows to change automatically the range in same measuring unit.

Hold the measurement.....

It is carried out by a simple short-circuit on the back connector block.

Scaling.....

Whatever the function, the user can program a scaling. The value to be posted is entry using the two keys of the keyboard while the value of horn measurement corresponding can be introduced even way, is measured by the instrument.

Function	Range (1)	Resolution	Accuracy (2)	Input resistance
DC voltage	500 mV	100 μ V	0,1 % + 100 μ V	> 1 000 M
	5 V	1 mV	0,1 % + 1 mV	1 M
	50 V	10 mV	0,1 % + 10 mV	1 M
	400 V	100 mV	0,1 % + 100 mV	1 M
AC voltage (true effective)	500 mV	100 μ V	0,7 % + 1 mV	1 M
	5 V	1 mV	0,5 % + 6 mV	1 M
	50 V	10 mV	0,5 % + 60 mV	1 M
	400 V	100 mV	0,5 % + 0,6 V	1 M
D.C current	4-20 mA ou 0-50 mA	10 μ A	0,2 % + 10 μ A	shunt 10 incorporé
	1 A (3)	1 mA		shunt 100 mV : AN 8003
	5 A (3)	1 mA		shunt 100 mV : AN 8004
AC current (true effective) (3)	1 A	1 mA		shunt 100 mV : AN 8003
	5 A	1 mA		shunt 100 mV : AN 8004

(1) Extended from measurement : of - 40 to + 110 % gauge.

(2) \pm (% reading + a number of units) on 1 year.

Continuous: of - 40 to 100 % gauge.

Into alternate : of 4 to 100 % gauge from 25 to 500 Hz without D.C component (possible measurements up to 10 Khz on some ranges with less precision).

(3) Current measurement with external shunt.

general characteristics

Display.....

From - 1999 to 9999 with indication, LED red, yellow or green, 14 mm.

Speed of measurement : 2,5 measures/s.
Temperature coefficient 10 % pré ci- sion/°C.

Acceptable maximum voltage on the ranges
voltage : 600 V. —

Common mode

Acceptable maximum volatge: 250 V~.

Rejection 110 dB to 50 Hz on the gauge
500 mV continuous..

Climatic environnement.....

Nominal field : 0 à 50°C, of 20 to 80% HR without condensation.

DIGITAL PANEL METERS



Isolated power supply.....
 230 V~ (± 10 %) 50 à 60 Hz.
 Others power supply:
 5 V- ± 10 %, 9 à 18 V-
 18 à 36 V-, 36 à 72 V-,
 24 V~ ± 10 %, 48 V~ ± 10 %, 115 V~ ± 10 %.

Presentation.....
 Case ABS.
 Model 72 X 24: sealing IP 40.
 Weight: approximately 300 G.

Connection.....
 Removable screwing connectors supplied with instrument.

dimensions

Dimensions in mm

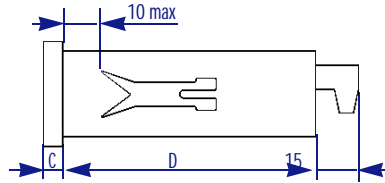

Case	A	B	C	D	Cut out panel
72 x 24	72	24	5	103	68.0 ^{+0.8} ₀ x 22.2 ^{+0.3} ₀

options and accessories


External shunts.....
 Modules screwed on the connector.
 AN 8003 : 1 A, 100 mV, accuracy 0,2 %
 AN 8004 : 5 A, 100 mV, accuracy 0,5 %
 Dimensions : 25 x 27,5 x 14,8 mm.

Transformers of current.....
 Classify 0,5.
 AN 5844 : 2/1 A,
 AN 5845 : 20/1 A,
 AN 5846 : 200/1 A.

Metal case seals.....
 Seal opposite before (IP 65), format
 99 x 36 x prof. 120 mm.

Mechanical flange of adaptation.....
 It makes it possible to adapt the instrument to a drilling of panel of higher size of a few millimetres.
 External dimensions : 80 x 32 mm.

instructions to order

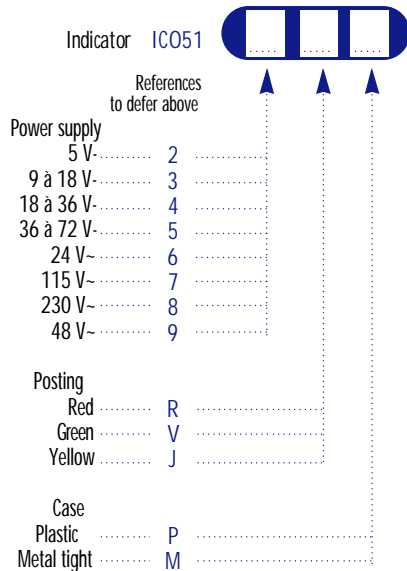

Options and accessories

Shunt 1 A	AN 8003
Shunt 5 A	AN 8004
Transformer of current 2/1 A	AN 5844
Transformer of current 20/1 A	AN 5845
Transformer of current 200/1 A	AN 5846
Flange of adaptation	AMD001
Indicator 12 ways	See note BCM 012



AOIP
BP 182
91133 Ris Orangis CEDEX
FRANCE
+33 169 028 900
www.aoip.com



The above mentioned characteristics are subject to change without prior notice

SOFIMAE laboratory on our premises of Ris-Orangis
 *Ranges available on www.cofrac.fr