


- NOTES:
1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K=KILO OHM, M=MEG OHM)
 2. RESISTOR WATTAGES ARE [1/10W] UNLESS OTHERWISE NOTED.
 3. CAPACITANCE VALUES ARE INDICATED IN MICRO FARADS UNLESS OTHERWISE NOTED. (P=MICRO-MICRO FARAD)
 4. VOLTAGE IN NO MARK SHOWS VHI HIGH BAND CONDITION.
 5. VOLTAGE IN / SHOWS LIGHT ON/OFF CONDITION.

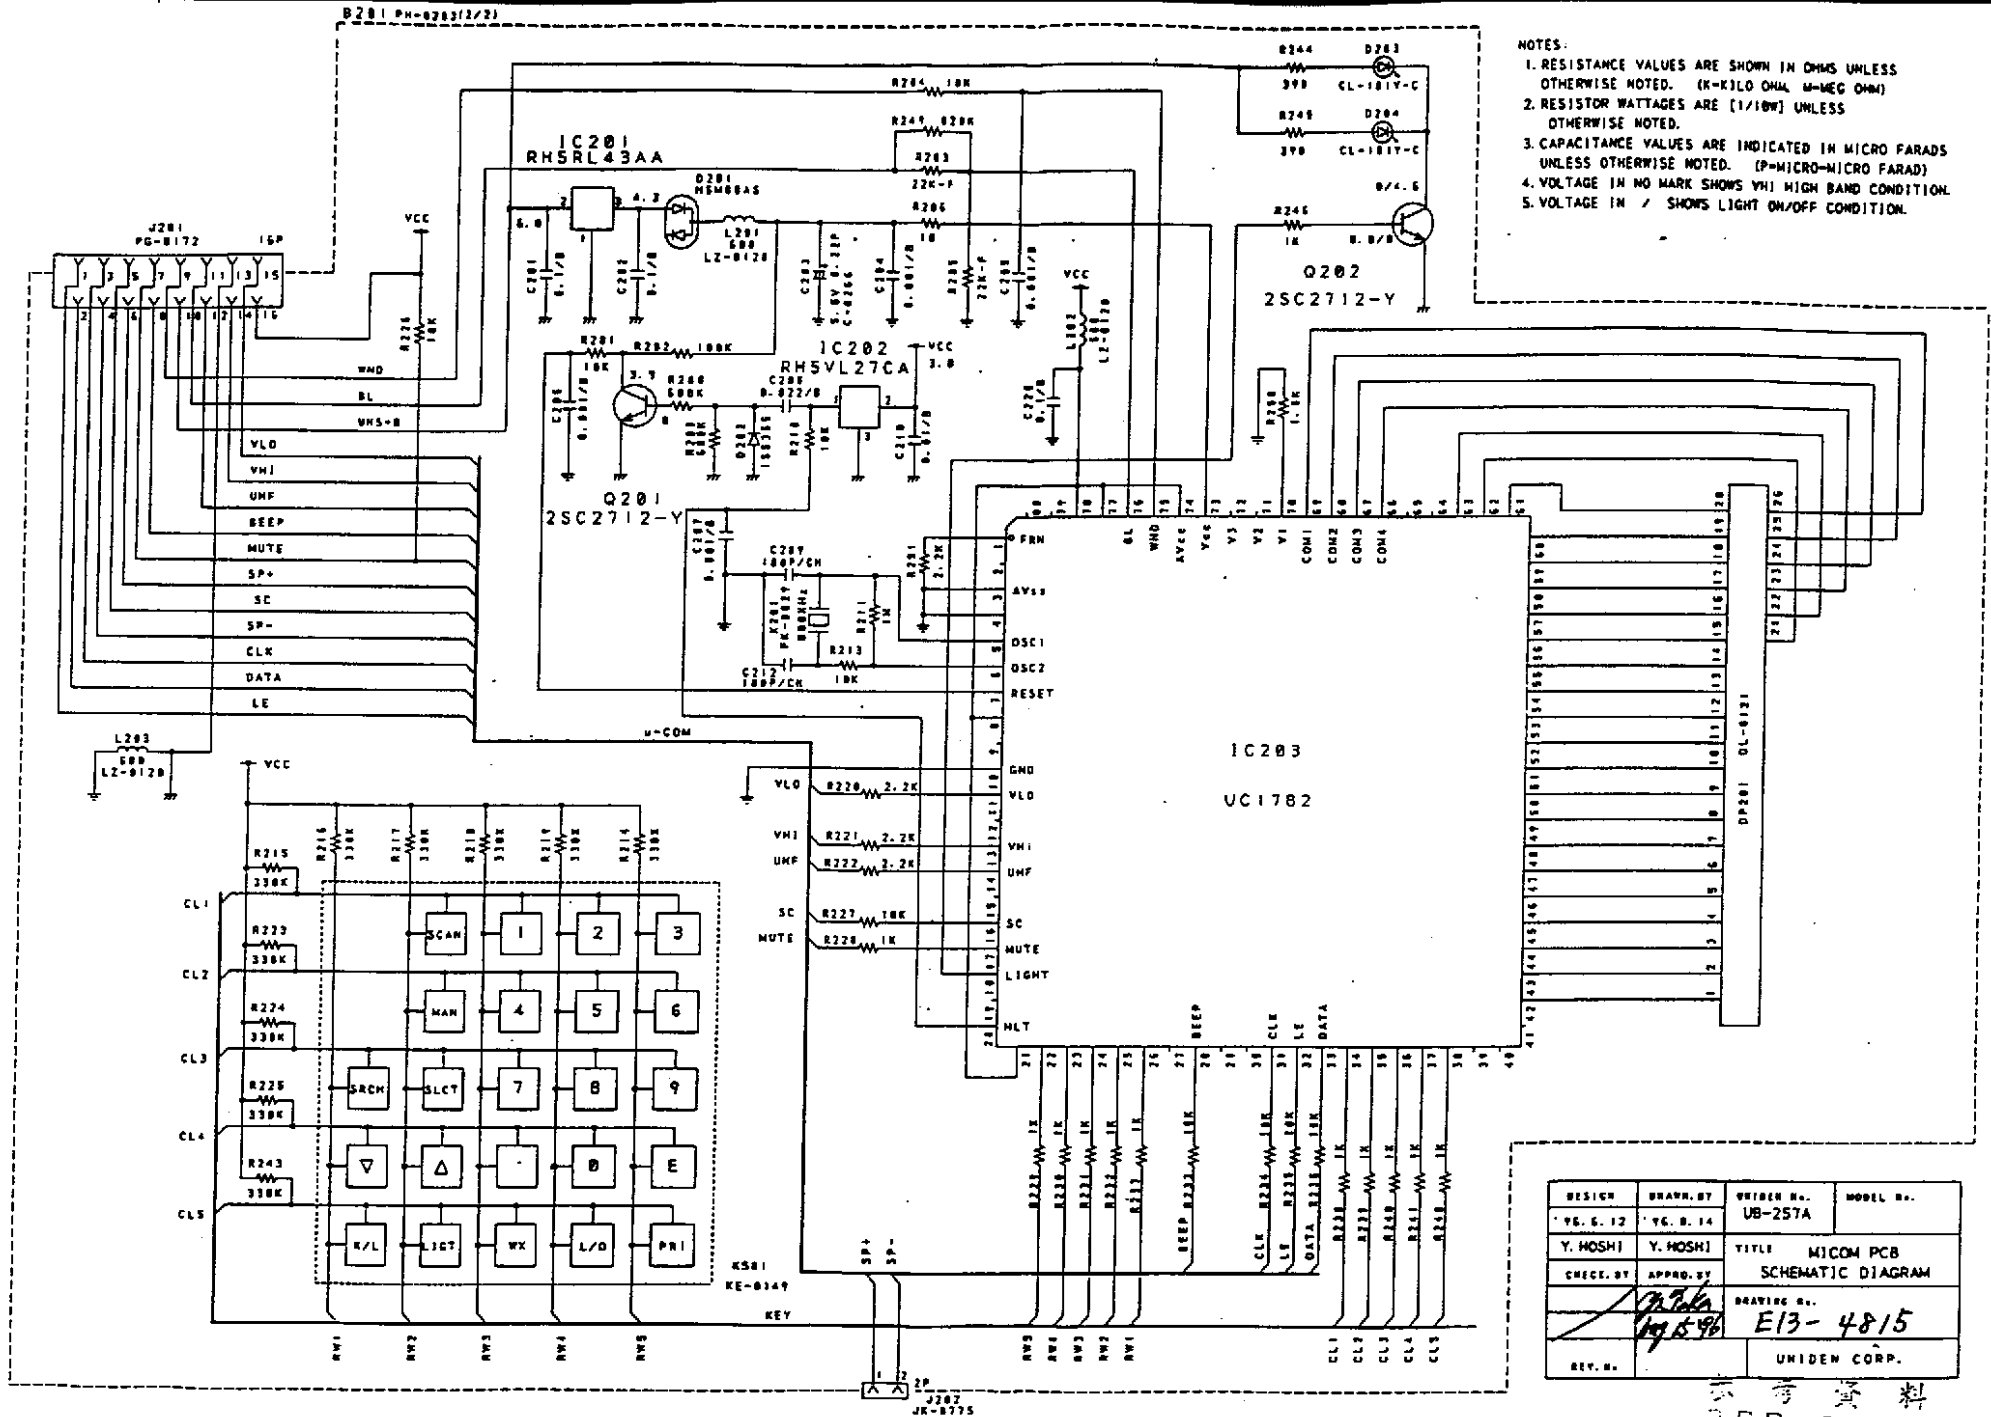

DESIGN	DRAWN BY	UIDEN NO.	MODEL NO.
Y. S. 12	Y. S. 14	UB-257A	
Y. HOSHI	Y. HOSHI	TITLE	MICOM PCB
CHECK BY	APPROV BY		SCHEMATIC DIAGRAM
		DRAWING NO.	E13-4815
REV. NO.		UIDEN CORP.	

資料
 専用
 ONLY
 AF6.5H