

DESCRIPTION

AMC MODEL AGT-2000-60DD-100 IS A BROAD BAND VARIABLE ATTENUATOR/MODULATOR, CONTROLLED BY 8 BIT POSITIVE TRUE BINARY LOGIC.

SPECIFICATIONS

- FREQUENCY RANGE 10 MHz - 2.0 GHz MINIMUM
- INSERTION LOSS 2.5 dB MAXIMUM
- ATTENUATION FLATNESS
(± dB MAXIMUM) 0-30 dB ±0.5 dB MAXIMUM
30-50 dB ±1.5 dB MAXIMUM
50-60 dB ±2.5 dB MAXIMUM
- ATTENUATION ACCURACY 0-10 dB ±2.0 dB MAXIMUM
10-20 dB ±1.0 dB MAXIMUM
20-50 dB ±1.5 dB MAXIMUM
50-60 dB ±2.0 dB MAXIMUM
- SWITCHING TIME ON: 25 μsec OFF: 10 μsec
- VSWR 2.0:1 MAXIMUM, 1.75 TYPICAL
(@ 0dB ATTENUATION)
- RF POWER RATINGS
OPERATING +10 dBm CW MAXIMUM,
+20 dBm TYPICAL
SURVIVAL +30 dBm CW MAXIMUM
- CONTROL 8 BIT TRUE BINARY LOGIC
- POWER SUPPLY +12VDC @ 250 mA MAXIMUM
(210 mA TYPICAL)
-12VDC @ 50 mA MAXIMUM
(30 mA TYPICAL)
- CONNECTORS
RF INPUT/OUTPUT SMA FEMALE
POWER AND CONTROLS 15 PIN MICRO-D SUBMINIATURE (MALE)
MATING CONNECTOR FURNISHED
- SIZE 2.00" x 1.81" x 0.50"



AVAILABLE OPTIONS

- A01 TWO SMA MALE RF CONNECTORS
- A02 J1 SMA MALE, J2 SMA FEMALE
- A03 FOR EXTENDED FREQUENCY RANGE UNITS OF
2-18 GHz, 2-19 GHz, 0.3-18 GHz, 0.2-18 GHz,
10 MHz-18 GHz REFER TO AGT-2018-60DD-100 (SLIM LINE)
DATA SHEET, FOR ANALOG VOLTAGE CONTROLLED UNITS WITH SOLDER
PINS REFER TO AGT-2018-60D-100 (SLIM LINE).
- A04 MOUNTING SURFACE UNPAINTED
- A05 ±15 VDC POWER SUPPLY
- A06 0 TO 30 dB RANGE
- A07 FOR HIGH SPEED UNITS OF ≤ 1 μsec AND EXTENDED FREQUENCY
RANGES OF 2-18 GHz, 2-19 GHz, 0.3-18 GHz, AND
0.2-18 GHz REFER TO DATA SHEETS AGT-2018-60DD-100
(SLIM LINE), FOR ANALOG VOLTAGE CONTROLLED UNIT WITH
SOLDER PINS REFER TO AGT-2018-60D-100 (SLIM LINE)
- A08 ANALOG CONTROLLED UNIT-10dB/VOLT PIN 2 IS USED
AS CONTROL (OTHER CONTROL VOLTAGES AVAILABLE).
FOR SOLDER PIN UNITS REFER TO AGT-2000-60D-100
(SLIM LINE)
- A09 9 BIT TRUE BINARY LOGIC
- A10 10 BIT TRUE BINARY LOGIC
- A11 11 BIT TRUE BINARY LOGIC
- A12 12 BIT TRUE BINARY LOGIC
- A13 BLIND MATE CONNECTORS
- SCS SPECIAL CUSTOMER SPECIFICATION

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

REVISIONS			DATE	APPROVED
ZONE	REV	DESCRIPTION		
	A	ORIGINAL RELEASE	04/29/93	AKG

MECHANICAL OUTLINE

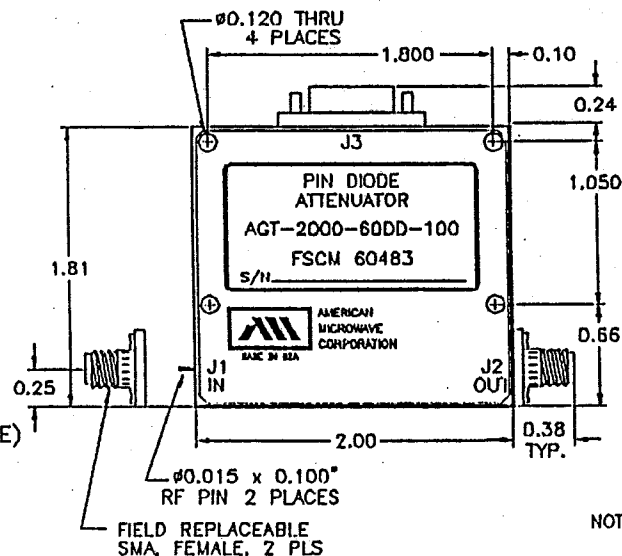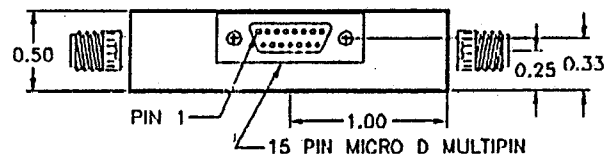

8 BIT TRUE BINARY LOGIC J3 PIN FUNCTIONS	
PIN NO.	FUNCTIONS.
1	GND
2	N/C *
3	N/C *
4	GND
5	0.25 V ₀ (LSB)
6	0.5 dB
7	1.0 dB
8	2.0 dB
9	4.0 dB
10	8.0 dB
11	16.0 dB
12	32.0 dB
13	+V
14	-V
15	N/C *

* N/C = NO CONNECTION

NOTES:

- 1) DIMENSIONS ARE IN INCHES
- 2) TOLERANCES: X.XX ±0.020
X.XXX ±0.010

ENVIRONMENTAL RATINGS

- TEMPERATURE -55°C TO +125°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY MIL-STD-202F, METHOD 103B COND. B
- SHOCK MIL-STD-202F, METHOD 213B COND. B
- VIBRATION MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE MIL-STD-202F, METHOD 107D COND. A



AMERICAN MICROWAVE CORPORATION
7311G GROVE RD., FREDERICK, MD. 21701
TEL: (301) 662-4700 FAX: (301) 662-4938

APPROVALS	DATE
W.P.P.	04/29/93
M.J.L.	04/29/93

PRODUCT FEATURE
AGT-2000-60DD-100
10 MHz - 2 GHz, PROGRAMMABLE VARIABLE ATTENUATOR

SIZE A SHEET 1 OF 2 DWG. # 100-4228