

DESCRIPTION

AMC MODEL MSN-8DR-05-STANDARD OPTION 2M372M39, HPR10W IS A REFLECTIVE SP8T PIN DIODE SWITCH DESIGNED TO MEET THE 2,380 TO 2,390 MHz FREQUENCY RANGE WITH A 10 WATT POWER HANDLING.

SPECIFICATIONS

- FREQUENCY RANGE: 2,370 MHz TO 2,390 MHz
- INSERTION LOSS: <2.5 dB
- ISOLATION: >60 dB MINIMUM
- VSWR: 1.3:1 MAXIMUM
- MAXIMUM INPUT POWER: 40 dBm *AVAILABLE AVERAGE POWER OF CONTINUOUS COMPLEX SIGNAL (PN SEQUENCE) WITHOUT NONLINEAR DISTORTION
- PEAK POWER: 46 dBm
- P1dB OUTPUT: >46 dBm (WHEN CONSIDERING 6dB BACK-OFF)
- SWITCHING TIME: <2 μSEC (UNDER HALF TIME OF 511 PN CODE LENGTH)
- MULTI PORT: 8 PORT
- POWER CONSUMPTION: +5V(500 mA) & -27V(<10 mA)
- CONTROL: TTL (HIGH: I/L, LOW: ISOLATION)
- ADDITIONAL FUNCTION: WITH ALL PORT OFF FUNCTION IF NECESSARY
- INTERFACE
 - RF: SMA FEMALE
 - POWER & CONTROL: MOLEX 48153
- SIZE: 140 X 70 X 21 (W X H X D)
- WEIGHT: 1.5 OUNCE TYPICAL

OPTIONS:

- 2M372M39: OPTIMIZED FOR 2,370 TO 2,390 MHz FREQUENCY RANGE
- HPR10W: 10 WATTS POWER HANDLING


ENVIRONMENTAL RATINGS:

- TEMPERATURE: -20°C TO +60°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	SEE ECR 07-066	05/09/07	
	A	SEE ECN# 07-105	8/19/07	

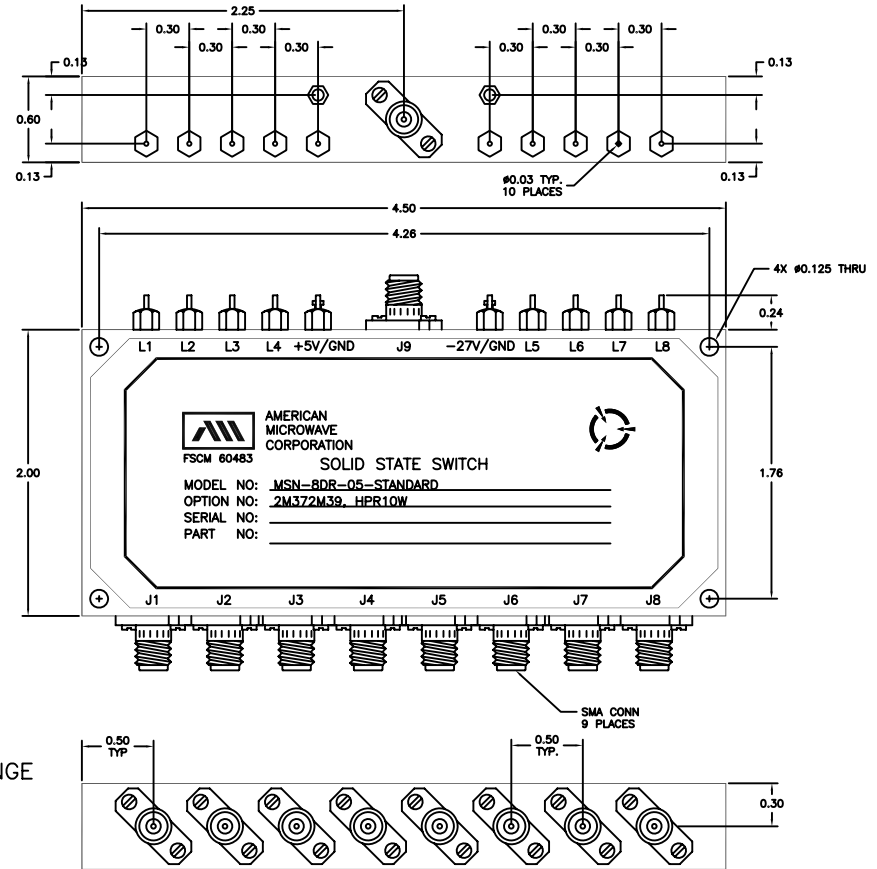

AMERICAN MICROWAVE CORPORATION


7311-G GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-4700 FAX: 301-662-4938
WEBSITE: www.americanmicrowavecorp.com
E-MAIL: sales@americanmicrowavecorp.com
ISO 9001:2000 CERTIFIED



APPROVALS		DATE	TITLE			REV.
DRAWN <i>WHS</i>		05/09/07	PRODUCT FEATURE MSN-8DR-05-STANDARD			
CHECKED			OPTIONS: 2M372M39, HPR10W SP8T PIN DIODE SWITCH			
ISSUED			SIZE	FSCM NO.	DWG NO.	REV.
			A	60483	100-M003-000	A
			SCALE	SHEET		
			N:S	1 OF 2		

DESCRIPTION

AMC MODEL MSN-8DR-05-STANDARD OPTION 2M372M39, HPR10W IS A REFLECTIVE SP8T PIN DIODE SWITCH DESIGNED TO MEET THE 2,380 TO 2,390 MHz FREQUENCY RANGE WITH A 10 WATT POWER HANDLING.

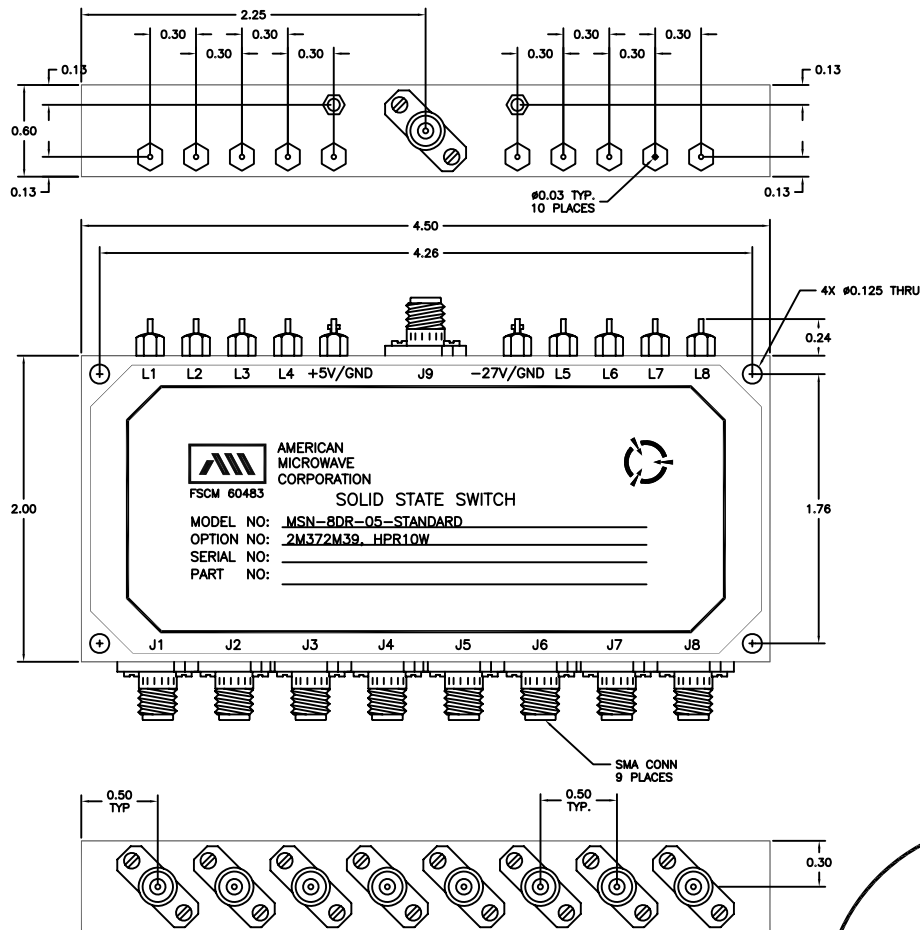

MECHANICAL OUTLINE

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010

AMERICAN MICROWAVE CORPORATION

7311-G GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-4700 FAX: 301-662-4938
WEBSITE: www.americanmicrowavecorp.com
E-MAIL: sales@americanmicrowavecorp.com
ISO 9001:2000 CERTIFIED



APPROVALS		DATE	TITLE			REV.
DRAWN <i>WJCS</i>		05/09/07	MECHANICAL OUTLINE MSN-8DR-05-STANDARD OPTIONS: 2M372M39, HPR10W SP8T PIN DIODE SWITCH			A
CHECKED			SIZE	FSCM NO.	DWG NO.	
ISSUED			A	60483	100-M003-000	
			SCALE	N:S	SHEET	2 OF 2