

JOB MODEL SW-0410-2A

SHEET NO. 1 OF 1


CALCULATED BY RLS

CHECKED BY SK-205

DATE 6-8-87

DATE

SCALE

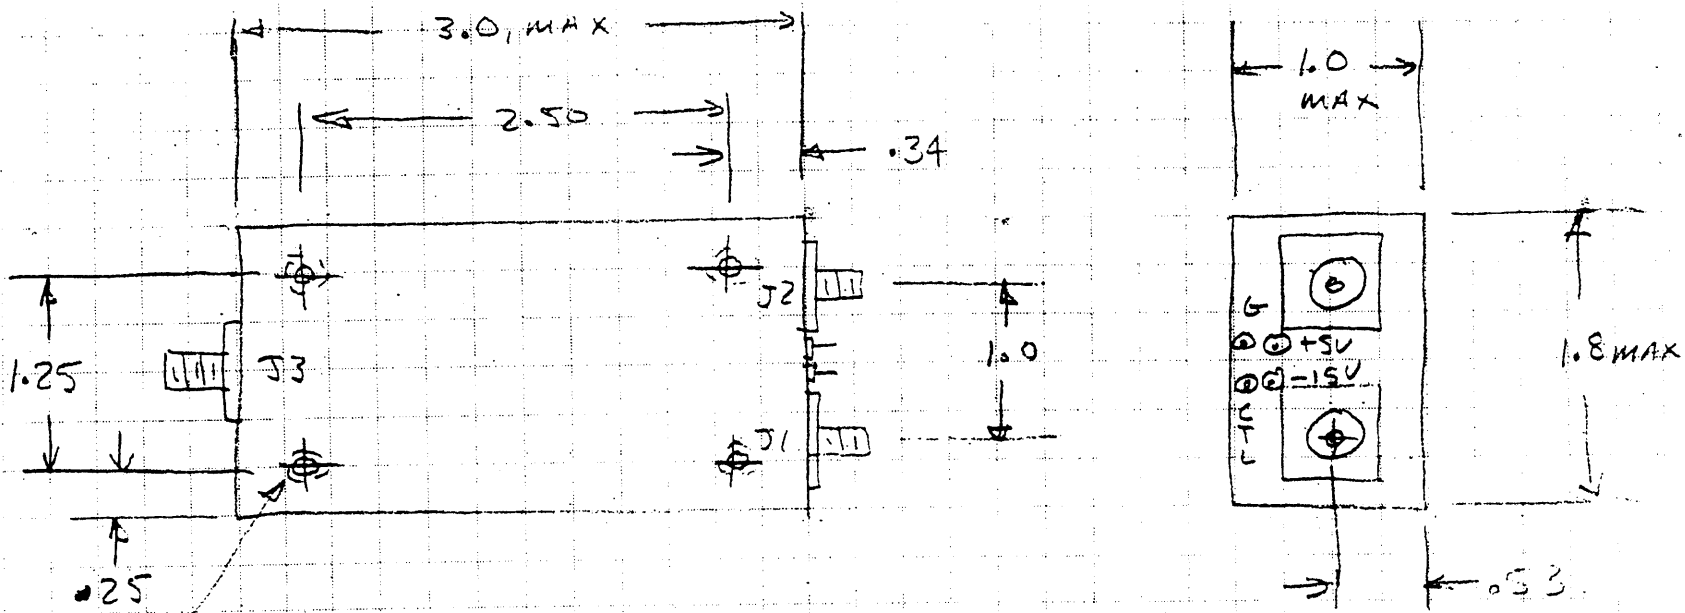

.112-40 UNC-2B (4-HOLDS)
 FARSIDE .180 MIN
 THREAD DEATH

15WATT UHF SPOT SWITCH

AME MODEL SW-0410-2A

FREQUENCY: 100 MHz - 16 GHz
 CONNECTORS: SMA FEMALE
 POWER: 15W, CW (HOT SWITCHED)
 ISOLATION: 60 dB, MIN
 INS LOSS: 0.75 dB, MAX
 SPEED: 10 μ-SEC, MAX

POWER REQ MTS: +5VDC @ 300mA
 -15VDC @ 40mA
 CONTROL: TTL, SINGLE CONTROL
 TTL HI -- J1-J3 ON
 TTL LO -- J2-J3 ON



AMERICAN
 MICROWAVE
 CORPORATION
 (301) 662-4700
 FAX: 301-662-4938

7311-G GROVE ROAD
 FREDERICK, MD 21701