

DESCRIPTION

AMC MODEL SW-1170-3D IS A REFLECTIVE BROAD BAND SP4T SWITCH MODULE WITH INTEGRAL TTL DRIVER.

SPECIFICATIONS


- FREQUENCY RANGE 1-18 GHz MINIMUM
- INSERTION LOSS
 - 1-4 GHz, 1.4 dB MAXIMUM
 - 4-8 GHz, 1.5 dB MAXIMUM
 - 8-12.4 GHz, 2.0 dB MAXIMUM
 - 12.4-18 GHz, 2.6 dB MAXIMUM
- ISOLATION
 - 1-12.4 GHz, 65 dB MINIMUM
 - 12.4-18 GHz, 55 dB MINIMUM
- VSWR (ON) 1.8:1 MAXIMUM
- RF POWER RATING 1W CW, 75W PEAK (1 μ S, PW MAXIMUM)
- SWITCHING TIME
 - RISE (10% RF TO 90% RF) 20 ns MAXIMUM
 - FALL (90% RF TO 10% RF) 20 ns MAXIMUM
 - ON (50% TTL TO 90% RF) 50 ns MAXIMUM
 - OFF (50% TTL TO 10% RF) 50 ns MAXIMUM
- CONTROL TTL, LOW POWER SCHOTTKY, (UNITY LOAD)
(SEE TRUTH TABLE)
LOGIC "0" = INSERTION LOSS
LOGIC "1" = ISOLATION
- POWER SUPPLY +5VDC \pm 5% @ 150 mA MAXIMUM
-12 TO -15VDC @ 50 mA MAXIMUM
- CONNECTORS
 - RF INPUT/OUTPUT SMA (FEMALE)
 - POWER SOLDER PIN
 - CONTROL SOLDER PIN
- SIZE 1.25" x 1.25" x 0.70"

AVAILABLE OPTIONS

- A01 50 Ω CONTROL IMPEDANCE
- A02 100 Ω CONTROL IMPEDANCE
- A03 INVERSE CONTROL LOGIC (LOGIC "0" ISOLATION)
- A04 EXTENDED FREQUENCY RANGE TO 100 MHz
- A07 VIDEO FILTER ON COMMON PORT ONLY (0.25 dB EXCESS LOSS)
- A08 VIDEO FILTER ON OUTPUT PORTS ONLY (0.25 dB EXCESS LOSS)
- A09 VIDEO FILTER ON ALL PORTS (0.5 dB EXCESS LOSS)
- A10 SMA MALE RF CONNECTORS (0.4 dB EXCESS LOSS)
- A11 SMC MALE CONTROL TERMINALS
- A13 +12 TO +18 VDC POWER SUPPLY
- A14 -5 VDC POWER SUPPLY

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
A		ORIGINAL RELEASE, JOB #30110E	3/8/95	<i>[Signature]</i>

MECHANICAL OUTLINE

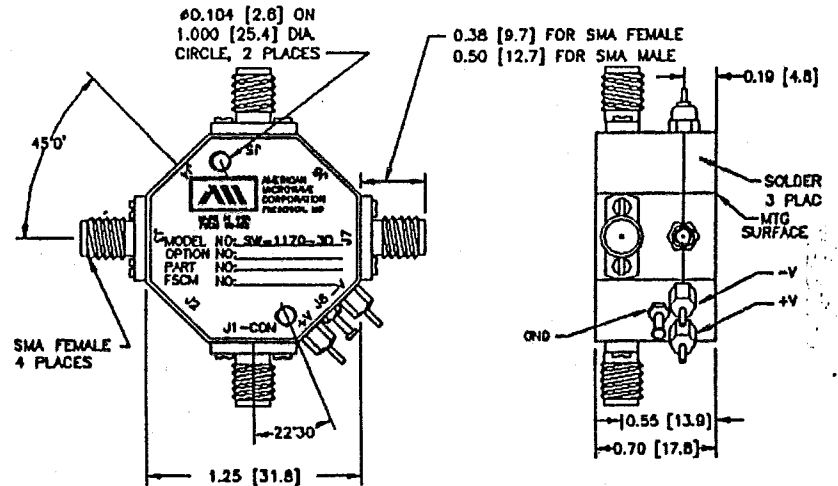


TRUTH TABLE			
E7	E5	E3	RF PATH ON
1	1	0	J1-J3
1	0	1	J1-J5
0	1	1	J1-J7

NOTES:

- 1) DIMENSIONS ARE IN INCHES [MILLIMETERS]
- 2) TOLERANCES: X.XX \pm 0.020
X.XXX \pm 0.010
- 3) WEIGHT: APPROX. 2.0 OZ

ENVIRONMENTAL RATINGS

- TEMPERATURE:
 - OPERATING -65°C TO +110°C
 - NON-OPERATING -65°C TO +125°C
- HUMIDITY MIL-STD-202F, METHOD 103B COND. B
- SHOCK MIL-STD-202F, METHOD 213B COND. B
- VIBRATION MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE MIL-STD-202F, METHOD 107D COND. A

		AMERICAN MICROWAVE CORPORATION 7311G GROVE RD., FREDERICK, MD. 21701 TEL: (301) 662-4700 FAX: (301) 662-4938		
				PRODUCT FEATURE SW-1170-3D 1.0-18 GHz, SP4T SWITCH MODULE
APPROVALS DRAWN <i>WSP</i> CHECKED	DATE 3/6/95	SIZE A	SHEET 1 OF 2	DWG. # 100-3669