



**TEST DATA**

**ON**

**500 MHz TO 18 GHz**

**AND**

**100 MHz TO 2 GHz**

**VERY LOW INSERTION LOSS**

**HIGH SPEED**

**LOW VIDEO TRANSIENT**

**REFLECTIVE**

**SP6T**

**RADIAL SOLID STATE SWITCH**

**(SURFACE MOUNTABLE)**

**AMC MODEL No:**

**SWN-1140-6DR-DEC-SP OPTION 0518, FM10**

**(Serial Number: 6MS90495)**

**REPORTED AND PREPARED**

**BY**

**RENE AFABLE**

**JUNE 23, 1999**

**WEB PAGE: [HTTP://WWW.AMWAVE.COM](http://www.amwave.com)**


**E-MAIL ADDRESS: [AMCPMI@AOL.COM](mailto:AMCPMI@AOL.COM)**

**7311 G GROVE ROAD, FREDERICK, MARYLAND 21704 • Tel. (301) 662-4700 • Fax (301) 662-4938**



**AMERICAN MICROWAVE  
CORPORATION**

## SP6T REFLECTIVE PIN-DIODE SWITCH

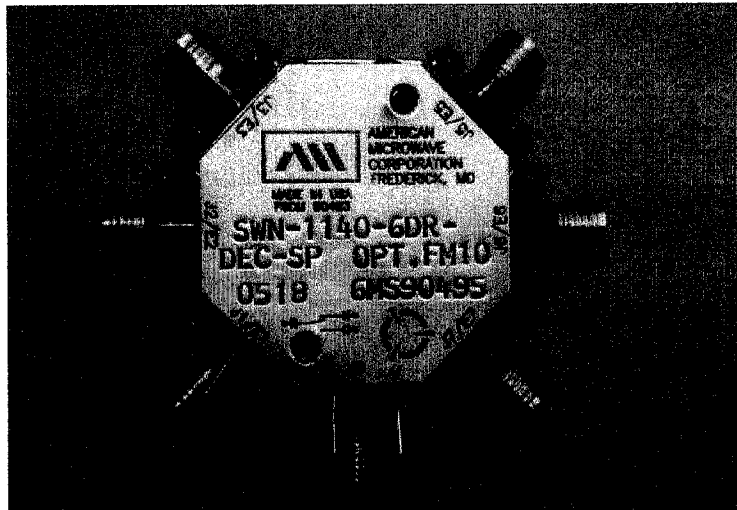

### KEY FEATURES

- 0.5 GHz TO 18 GHz  
(10MHz to 18GHz optional)
- VERY LOW INSERTION LOSS
- HIGH SPEED
- TTL LOGIC COMPATIBLE
- SURFACE MOUNTABLE
- SLIMLINE

**AMC MODEL No: SWN-1140-6DR-DEC-SP OPTION 0518, FM10**

### SPECIFICATIONS: (REFLECTIVE)

• FREQUENCY RANGE	:	0.5 GHz to 18 GHz (10MHz to 18GHz Optional)
• INSERTION LOSS	:	2.5 dB MAX.
	:	1.00 dB TYP. @ 500 MHz
	:	0.80 dB TYP. @ 2.0 GHz
	:	1.20 dB TYP. @ 6.0 GHz
	:	1.60 dB TYP. @ 12.0 GHz
	:	2.50 dB TYP. @ 18.0 GHz
• ISOLATION	:	≥ 40 dB MIN.
	:	≥ 90 dB TYP. @ 500 MHz
	:	≥ 85 dB TYP. @ 2.0 GHz
	:	≥ 75 dB TYP. @ 6.0 GHz
	:	≥ 65 dB TYP. @ 12.0 GHz
	:	≥ 40 dB TYP. @ 18.0 GHz
• VSWR	:	2.0:1
• SWITCHING SPEED	:	"RISE" 15nS MAX., 10nS TYP.
	:	"FALL" 15nS MAX., 10nS TYP.
	:	"ON" 100nS MAX., 75nS TYP.
	:	"OFF" 100nS MAX., 75nS TYP.
• CONTROL	:	3 Bit Decoder (Independent Control Available)
• VIDEO TRANSIENTS	:	≤320 mV Peak to Peak, 300 MHZ Bandwidth
	:	≤100 mV Peak to Peak, 20 MHZ Bandwidth
• RF INPUT POWER	:	+20dBm Operating, 1 Watt Survival (Other power Levels available)
• DC POWER SUPPLY	:	+5vdc @ +320mA MAX.
(Other supply voltages available)	:	- 12vdc @ -100mA MAX.
• SIZE	:	1.25" X 1.25" X 0.4"
• WEIGHT	:	≤ 2.0 oz.


**JUNE 23, 1999**

7311 G GROVE ROAD, FREDERICK, MARYLAND 21704 • Tel. (301) 662-4700 • Fax (301) 662-4938



### SUMMARY TEST DATA

<b>MODEL NUMBER</b>	<b>: SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10</b>
<b>SERIAL NUMBER</b>	<b>: 6MS90495</b>
<b>ENGINEER</b>	<b>: RENE AFABLE</b>
<b>VOLTAGE &amp; CURRENT DRAW</b>	<b>: +5vdc: +313mA; -12vdc: -44mA</b>

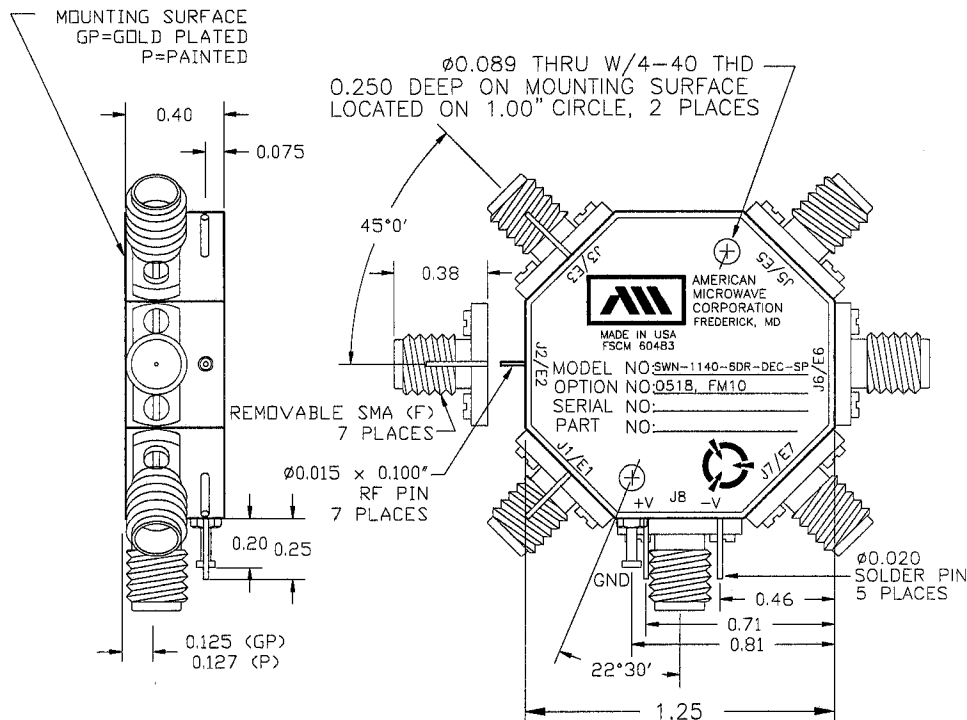

ALL DIMENSIONS ARE IN INCHES

TOLERANCES:

X.XX	±0.020
X.XXX	±0.010

**ENVIRONMENTAL RATINGS:**

- TEMPERATURE:..... -55°C TO +85°C (OPERATING)  
-65°C TO +125°C (STORAGE)
- HUMIDITY:..... MIL-STD-202F, METHOD 103B COND. B
- SHOCK:..... MIL-STD-202F, METHOD 213B COND. B
- VIBRATION:..... MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE:..... MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE:..... MIL-STD-202F, METHOD 107D COND. A

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION.


JUNE 23, 1999

**DESCRIPTION**  
 AMC MODEL SWN-1140-6DR-DEC-SP-FM10 IS A SINGLE POLE SIX THROW, REFLECTIVE SWITCH MODULE WITH VERY LOW INSERTION LOSS, HIGH SPEED, AND WITH INTEGRAL TTL DRIVER, DESIGNED FOR BROAD BAND OR NARROW BAND OPERATIONS.



**SPECIFICATIONS:**

- FREQUENCY: 5.5 GHz TO 6.0 GHz
- INSERTION LOSS: 1.0 dB MAXIMUM  
0.8 dB TYPICAL  
0.6 dB GOAL
- ISOLATION: 40 dB MINIMUM
- VSWR: 2.0:1 MAXIMUM
- SPEED: TURN ON: 60ns MAXIMUM  
TURN OFF: 60ns MAXIMUM
- RF POWER INPUT: 0.25 WATT
- CONTROL: TTL SEE LOGIC TABLE
- POWER SUPPLY: +5V @ 320 mA MAXIMUM  
-12V @ 50mA MAXIMUM
- RF CONNECTORS: REMOVABLE SMA FEMALE
- SIZE: ø1.25 POINT TO POINT x 0.400 (H)
- WEIGHT: 2.75 OUNCES

MOUNTING SURFACE  
 GP=GOLD PLATED  
 P=PAINTED

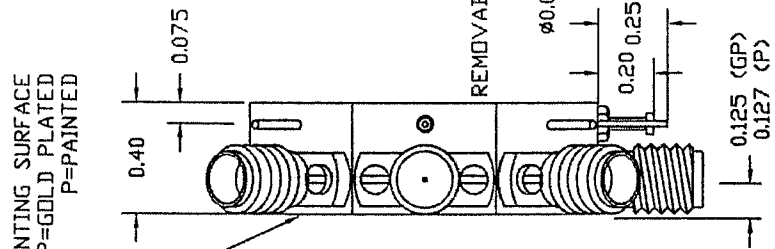

ø0.089 THRU W/4-40 THD  
 0.250 DEEP ON MOUNTING SURFACE  
 LOCATED ON 1.00" CIRCLE, 2 PLACES

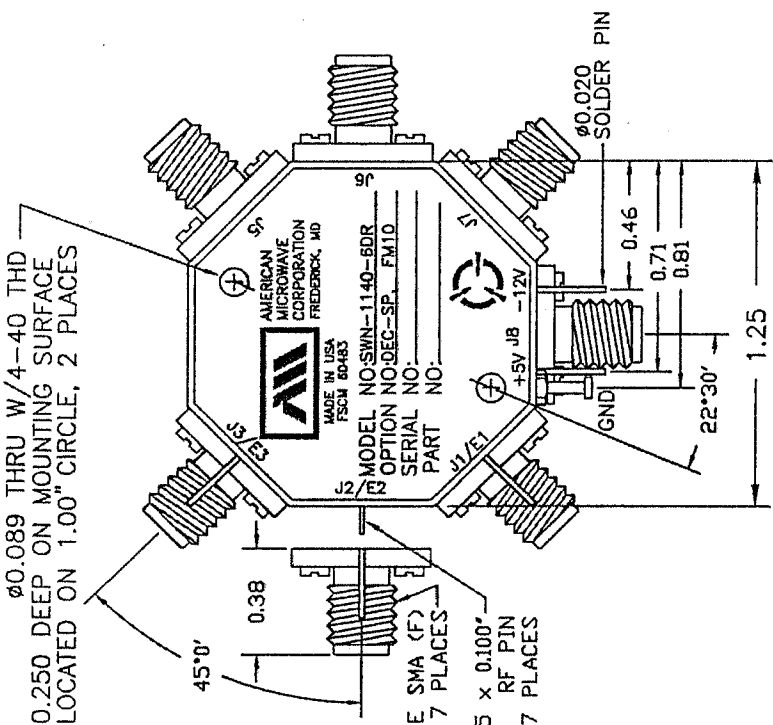

LOGIC TABLE

E1	E2	E3	PATH ON	J1	J2	J3	J5	J6	J7
L	L	L	L	L	L	L	L	H	H
H	L	L	L	L	L	L	L	L	H
L	H	L	L	L	L	L	L	L	H
H	H	L	L	L	L	L	L	L	H
L	L	L	L	L	L	L	L	L	H
H	L	L	L	L	L	L	L	L	H

NOTE:  
 DR=WITH DRIVER, REFLECTIVE  
 DT=WITH DRIVER, NON-REFLECTIVE/ABSORPTIVE

**CONFIDENTIAL AND PROPRIETARY**

CONTRACT NO.		APPROVALS		DATE
DRAWN		CHECKED		DATE
ISSUED		REV.		DATE
TITLE		AMERICAN MICROWAVE CORPORATION FREDERICK, MARYLAND		
OUTLINE DRAWING		SWN-1140-6DR-DEC-SP-FM10 REFLECTIVE RADIAL SOLID STATE SWITCH		
SIZE	FRESH NO.	DWG NO.	REV.	—
A	60483	100-4169-3	—	—
SCALE	N/S	SHEET	1 of 3	

**ENVIRONMENTAL RATINGS:**

- TEMPERATURE: -55°C TO +85°C (OPERATING)  
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A

ALL DIMENSIONS ARE IN INCHES  
 TOLERANCES:  
 X.XX ±0.020  
 X.XXX ±0.010

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE DR REVISION

**DESCRIPTION:** -1140-6DR/DT-STANDARD-FM10 IS A SINGLE POLE SIX THROW, REFLECTIVE OR NON-REFLECTIVE/ABSORPTIVE SWITCH MODULE WITH VERY LOW INSERTION LOSS, HIGH SPEED AND WITH INTEGRAL TTL DRIVER, DESIGNED FOR BROAD BAND OPERATIONS.

**SPECIFICATIONS:**


- FREQUENCY: 0.5 GHz TO 18 GHz
- INSERTION LOSS: REFLECTIVE: 2.5db  
ABSORPTIVE: 3.0db
- ISOLATION: 0.5 GHz TO 2 GHz: 85db  
2 GHz TO 6 GHz: 75db  
6 GHz TO 12 GHz: 65db  
12 GHz TO 18 GHz: 40db
- VSWR: REFLECTIVE IN/OUT: 2.0:1  
ABSORPTIVE IN/OUT: 2.0:1  
ABSORPTIVE OUT/DIFF: 2.0:1
- SPEED: RISE: 10ns TYPICAL, 15ns MAX.  
FALL: 10ns TYPICAL, 15ns MAX.  
DELAY ON: 75ns TYPICAL, 100ns MAX.  
DELAY OFF: 75ns TYPICAL, 100ns MAX.
- POWER INPUT: (CW)+20dBm (STANDARD), +10 dBm (HIGH SPEED)
- SURVIVAL POWER: 1 WATT CW, 10 WATTS PEAK 1 usec
- CONTROL: TTL LOGIC "0"=ON "1"=OFF
- POWER SUPPLY: +5V @ 320 mA MAX.  
-5V @ 75mA MAX.(REFLECTIVE)  
100mA MAX.(ABSORPTIVE/NON-REFLECTIVE)
- SIZE: 1.25" (L) x 1.25" (W) x 0.40" (H)
- WEIGHT: 2.0 oz.

**OPTIONS:**


- INDEPENDENT CONTROL WITH SOLDER PIN STANDARD
- DEC-SP 3 BIT DECODER WITH SOLDER PIN
- 10M18 10 MHz TO 18 GHz (INSERTION LOSS INCREASES BY 1.5db AT 10 GHz AND 0.5db AT 18 GHz)
- 100M18 100 MHz TO 18 GHz (INSERTION LOSS INCREASES BY 1.5db AT 100 MHz AND 0.5db AT 18 GHz)
- 118 1 GHz TO 18 GHz (NO CHANGE IN INSERTION LOSS)
- 218 2 GHz TO 18 GHz (NO CHANGE IN INSERTION LOSS)
- 412 4 GHz TO 12.4 GHz (NO CHANGE IN INSERTION LOSS)
- 618 6 GHz TO 18 GHz (NO CHANGE IN INSERTION LOSS)
- 1218 12 GHz TO 18 GHz (NO CHANGE IN INSERTION LOSS)
- 100M20 100 MHz TO 20 GHz (INSERTION LOSS INCREASES BY 1.5db AT 100 MHz AND 1.0db AT 20 GHz)
- 220 2 GHz TO 20 GHz (INSERTION LOSS INCREASES BY 1.0db AT 20 GHz)
- 1020 10 GHz TO 20 GHz (INSERTION LOSS INCREASES BY 1.0db AT 20 GHz)
- 801 -12V POWER SUPPLIES
- 802 -15V POWER SUPPLIES
- 803 REVERSE LOGIC "1"=ON "0"=OFF
- 804 DRIVERLESS, CURRENT CONTROLLED
- 805 HIGH SPEED, TURNON/TURNOFF 20 nsec MAXIMUM WHEN APPLICABLE OR OPTION HS
- 806 HIGH POWER - SPECIFY CW POWER, PULSE WIDTH, DUTY CYCLE, RF FREQUENCY AND BANDWIDTH
- 807 CUSTOM DESIGNED PRODUCT - SPECIFY INITIALS OF CUSTOMER
- 808 LOW VIDEO TRANSIENTS - SPECIFY VIDEO BANDWIDTH
- 809 LOW INSERTION LOSS VERSION
- 810 HIGHER ISOLATION VERSION
- 811 0.70" THICK VERSION
- 812 0.88" THICK VERSION

**ENVIRONMENTAL RATINGS:**

- TEMPERATURE: -55°C TO +85°C (OPERATING)  
-65°C TO +125°C (STORAGE)
  - HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
  - SHOCK: MIL-STD-202F, METHOD 213B COND. B
  - VIBRATION: MIL-STD-202F, METHOD 204D COND. B
  - ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
  - TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A
- NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

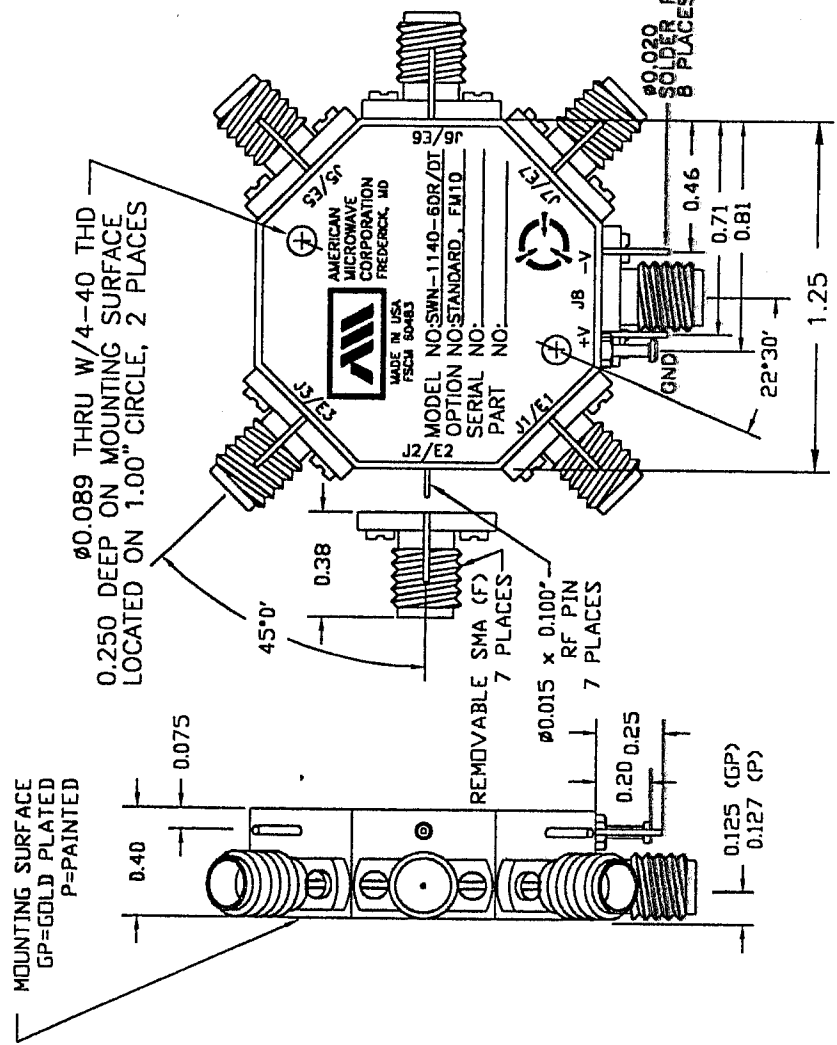

ALL DIMENSIONS ARE IN INCHES  
 TOLERANCES:  
 X.XX ±0.020  
 X.XXX ±0.010



**CONFIDENTIAL AND PROPRIETARY**

CONTRACT NO.		APPROVALS		DATE	TITLE
		WELP		08/02/00	AMERICAN MICROWAVE CORPORATION FREDERICK, MARYLAND
DRAWN		CHECKED		ISSUED	PRODUCT FEATURE
		A		1/1/00	SWN-1140-6DR/DT-STANDARD-FM10 REFLECTIVE OR NON-REFLECTIVE/ABSORPTIVE RADIAL SOLID STATE SWITCH
SIZE FROM M.A.		DWG NO.		REV.	
A		60483		100-4169-4	
SCALE		N/S		SHEET 1 of 3	

ZONE	REV.	DESCRIPTION	DATE	APPROVED
		ORIGINAL JOB # 901011E	08/02/00	

**DESCRIPTION:**  
 AMC MODEL SWN-1140-6DR/DI-DEC-SP-FM10 IS A SINGLE POLE SIX THROW, REFLECTIVE OR NON-REFLECTIVE/ABSORPTIVE SWITCH MODULE WITH VERY LOW INSERTION LOSS, HIGH SPEED AND WITH INTEGRAL TTL DRIVER, DESIGNED FOR BROAD BAND OPERATIONS.

**SPECIFICATIONS:**

- FREQUENCY: 0.5 GHz TO 18 GHz
- REFLECTIVE: 2.5db
- ABSORPTIVE: 3.0db
- INSERTION LOSS: 0.5 GHz TO 2 GHz: 85db
- 2 GHz TO 5 GHz: 75db
- 5 GHz TO 12 GHz: 65db
- 12 GHz TO 18 GHz: 40db
- VSWR: REFLECTIVE IN/OUT: 2.0:1
- ABSORPTIVE IN/OUT: 2.0:1
- ABSORPTIVE OUT/OFF: 2.0:1
- SPEED: RISE: 10ns TYPICAL, 15ns MAX.
- FALL: 10ns TYPICAL, 15ns MAX.
- DELAY ON: 75ns TYPICAL, 100ns MAX.
- DELAY OFF: 75ns TYPICAL, 100ns MAX.
- POWER INPUT: (CW)+20dbm (STANDARD), +10 dbm (HIGH SPEED)
- SURVIVAL POWER: 1 WATT CW, 10 WATTS PEAK 1 USEC
- CONTROL: TTL LOGIC "0"=ON "1"=OFF
- POWER SUPPLY: +5V @ 320 mA MAX.
- -5V @ 75mA MAX (REFLECTIVE)
- 100mA MAX (ABSORPTIVE/NON-REFLECTIVE)
- SIZE: 1.25" (L) x 1.25" (W) x 0.40" (H)
- WEIGHT: 2.0 oz.



**OPTIONS:**

- INDEPENDENT CONTROL WITH SOLDER PIN STANDARD
- DEC-SP 3 BIT DECODER WITH SOLDER PIN
- 10M18 10 MHz TO 18 GHz (INSERTION LOSS INCREASES BY 1.5db AT 10 MHz AND 0.5db AT 18 GHz)
- 100M18 100 MHz TO 18 GHz (INSERTION LOSS INCREASES BY 1.5db AT 100 MHz AND 0.5db AT 18 GHz)
- 118 1 GHz TO 18 GHz (NO CHANGE IN INSERTION LOSS)
- 218 2 GHz TO 18 GHz (NO CHANGE IN INSERTION LOSS)
- 418 4 GHz TO 18 GHz (NO CHANGE IN INSERTION LOSS)
- 618 6 GHz TO 18 GHz (NO CHANGE IN INSERTION LOSS)
- 1218 12 GHz TO 18 GHz (NO CHANGE IN INSERTION LOSS)
- 100M20 100 MHz TO 20 GHz (INSERTION LOSS INCREASES BY 1.5db AT 100 MHz AND 1.0db AT 20 GHz)
- 220 2 GHz TO 20 GHz (INSERTION LOSS INCREASES BY 1.0db AT 20 GHz)
- 1020 10 GHz TO 20 GHz (INSERTION LOSS INCREASES BY 1.0db AT 20 GHz)
- B01 -12V POWER SUPPLIES
- B02 -15V POWER SUPPLIES
- B03 REVERSE LOGIC "1"=ON "0"=OFF
- B04 DRIVERLESS, CURRENT CONTROLLED
- B05 HIGH SPEED, TURNON/TURNOFF 20 nsec MAXIMUM WHEN APPLICABLE OR OPTION HS
- B06 HIGH POWER - SPECIFY CW POWER, PEAK POWER, PULSE WIDTH, DUTY CYCLE, RF FREQUENCY AND BANDWIDTH
- B07 CUSTOM DESIGNED PRODUCT - SPECIFY INITIALS OF CUSTOMER
- B08 LOW VIDEO TRANSIENTS - SPECIFY VIDEO BANDWIDTH
- B09 LOW INSERTION LOSS VERSION
- B10 HIGHER ISOLATION VERSION
- B11 0.70" THICK VERSION
- B12 0.88" THICK VERSION

**ENVIRONMENTAL RATINGS:**

- TEMPERATURE: -55°C TO +85°C (OPERATING)
- -85°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

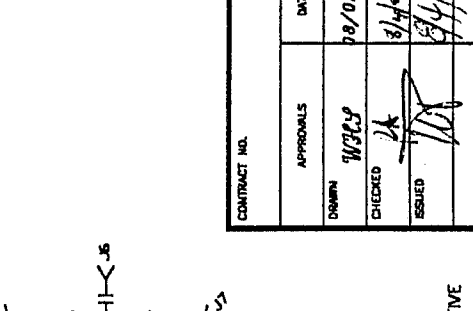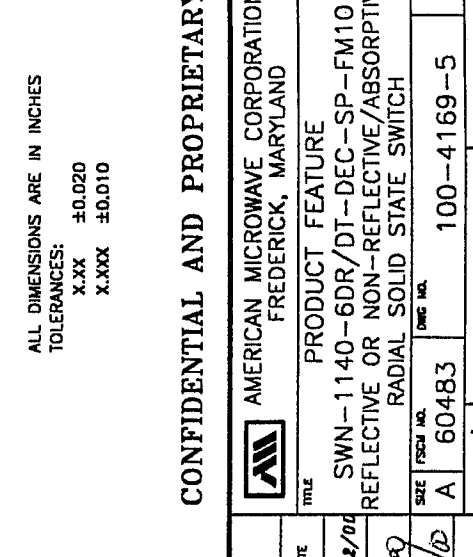

E1	E2	E3	PATH ON	J1	J2	J3	J4	J5	J6	J7
L	L	L	L	L	L	L	L	L	L	L
H	L	L	L	L	L	L	L	L	L	L
L	H	L	L	L	L	L	L	L	L	L
H	H	L	L	L	L	L	L	L	L	L
L	L	H	L	L	L	L	L	L	L	L
H	L	H	L	L	L	L	L	L	L	L

ALL DIMENSIONS ARE IN INCHES  
 TOLERANCES:  
 X.XX ±0.020  
 X.XXX ±0.010

**CONFIDENTIAL AND PROPRIETARY**

AMERICAN MICROWAVE CORPORATION  
 FREDERICK, MARYLAND

PRODUCT FEATURE  
 SWN-1140-6DR/DI-DEC-SP-FM10  
 REFLECTIVE OR NON-REFLECTIVE/ABSORPTIVE  
 RADIAL SOLID STATE SWITCH

CONTRACT NO. \_\_\_\_\_  
 TITLE \_\_\_\_\_  
 DATE 08/02/00  
 DRAWN WJG/gy  
 CHECKED JAK  
 ISSUED JLD  
 SIZE A  
 FSCM NO. 60483  
 DWG NO. 100-4169-5  
 SCALE N/S  
 SHEET 1 of 3

**DESCRIPTION**

AMC MODEL SW-1140-6DR/DT-STANDARD IS A SINGLE POLE SIX THROW, REFLECTIVE OR NON-REFLECTIVE/ABSORPTIVE SWITCH MODULE WITH HIGH ISOLATION, LOW LOSS, HIGH SPEED, AND WITH INTEGRAL TTL DRIVER, DESIGNED FOR BROAD BAND OPERATIONS.

**SPECIFICATIONS:**

- FREQUENCY: 0.5 GHz TO 18 GHz
- REFLECTIVE: 3.5db
- ABSORPTIVE: 4.25db
- ISOLATION: 0.5 GHz TO 2 GHz: 60db
- 2 GHz TO 18 GHz: 70db
- VSWR: REFLECTIVE IN/OUT: 2.0:1
- ABSORPTIVE IN/OUT: 2.0:1
- ABSORPTIVE OUT/OFF: 2.0:1
- SPEED: RISE: 10ns TYPICAL, 15ns MAX.
- FALL: 10ns TYPICAL, 15ns MAX.
- DELAY ON: 75ns TYPICAL, 100ns MAX.
- DELAY OFF: 75ns TYPICAL, 100ns MAX.
- POWER INPUT: (CW)-20dBm (STANDARD), +10 dBm (HIGH SPEED)
- SURVIVAL POWER: 1 WATT CW, 10 WATTS PEAK 1 USEC
- CONTROL: TTL LOGIC "0"=ON "1"=OFF
- POWER SUPPLY: +5V @ 300 mA MAX.
- -5V @ 75mA MAX.(REFLECTIVE)
- 100mA MAX.(ABSORPTIVE/NON-REFLECTIVE)
- SIZE: 1.25" (L) x 1.25" (W) x 0.40" (H)
- WEIGHT: 2.0 oz.

**OPTIONS:**



- INDEPENDENT CONTROL WITH SOLDER PIN STANDARD
- DEC-SF 3 BIT DECODER WITH SOLDER PIN
- 10M18 10 MHz TO 18 GHz (INSERTION LOSS INCREASES BY 1.5db AT 10 MHz AND 0.5db AT 18 GHz)
- 100M18 100 MHz TO 18 GHz (INSERTION LOSS INCREASES BY 1.5db AT 100 MHz AND 0.5db AT 18 GHz)
- 118 1 GHz TO 18 GHz (NO CHANGE IN INSERTION LOSS)
- 218 2 GHz TO 18 GHz (NO CHANGE IN INSERTION LOSS)
- 418 4 GHz TO 12.4 GHz (NO CHANGE IN INSERTION LOSS)
- 618 6 GHz TO 18 GHz (NO CHANGE IN INSERTION LOSS)
- 1218 12 GHz TO 18 GHz (NO CHANGE IN INSERTION LOSS)
- 100M20 100 MHz TO 20 GHz (INSERTION LOSS INCREASES BY 1.5db AT 100 MHz AND 1.0db AT 20 GHz)
- 220 2 GHz TO 20 GHz (INSERTION LOSS INCREASES BY 1.0db AT 20 GHz)
- 1020 10 GHz TO 20 GHz (INSERTION LOSS INCREASES BY 1.0db AT 20 GHz)
- 801 -12V POWER SUPPLIES
- 802 -15V POWER SUPPLIES
- 803 REVERSE LOGIC "1"=ON "0"=OFF
- 804 DRIVERLESS, CURRENT CONTROLLED
- 805 HIGH SPEED, TURNON/TURNOFF 20 nsec MAXIMUM WHEN APPLICABLE OR OPTION HS
- 806 HIGH POWER - SPECIFY CW POWER, PULSE WIDTH, DUTY CYCLE, RF FREQUENCY AND BANDWIDTH
- 807 CUSTOM DESIGNED PRODUCT- SPECIFY INITIALS OF CUSTOMER
- 808 LOW VIDEO TRANSIENTS - SPECIFY VIDEO BANDWIDTH
- 809 LOW INSERTION LOSS VERSION
- 810 HIGHER ISOLATION VERSION
- 811 0.70" THICK VERSION
- 812 0.88" THICK VERSION

**ENVIRONMENTAL RATINGS:**

- TEMPERATURE: -55°C TO +85°C (OPERATING)
- -55°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 2040 COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

MOUNTING SURFACE  
GP=GOLD PLATED  
P=PAINTED

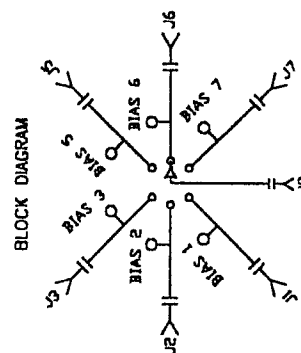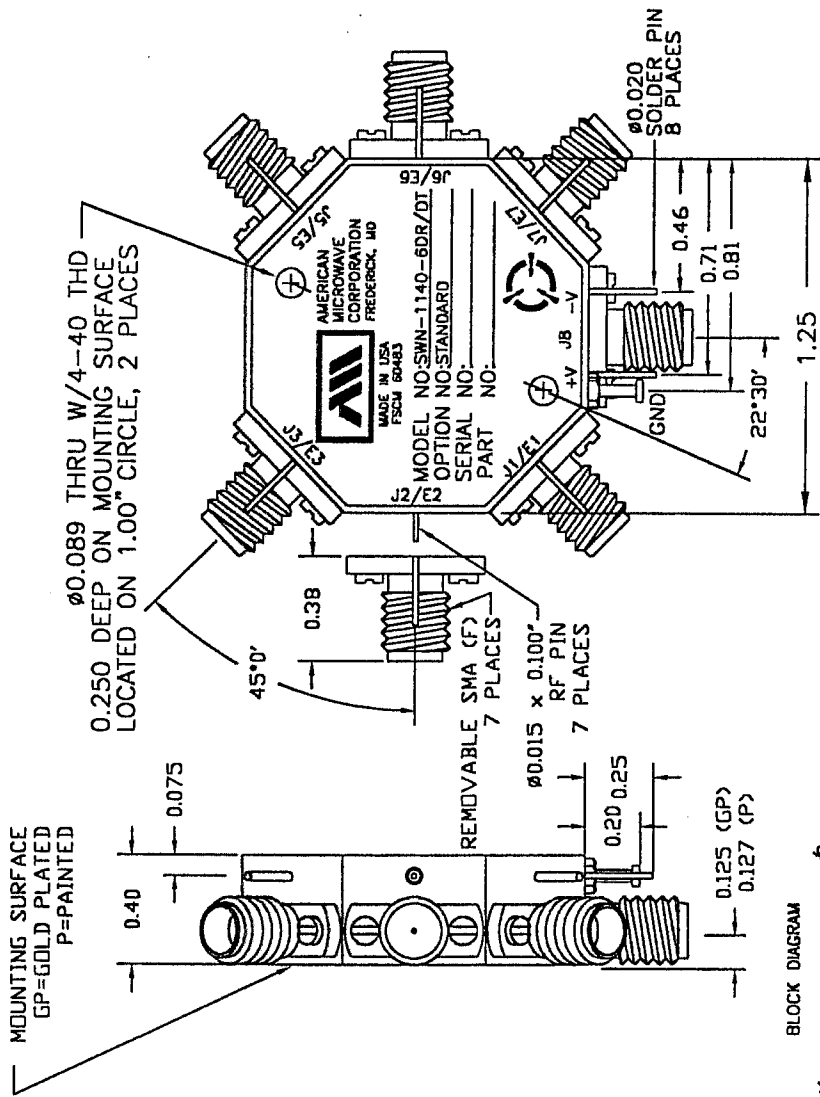

ALL DIMENSIONS ARE IN INCHES  
TOLERANCES:  
X.XX ±0.020  
X.XXX ±0.010

**CONFIDENTIAL AND PROPRIETARY**

CONTRACT NO.		TITLE	
APPROVALS	DATE	AMERICAN MICROWAVE CORPORATION FREDERICK, MARYLAND	
DRAWN: WJG	DATE: 08/08/00	PRODUCT FEATURE	
CHECKED: [Signature]	DATE: 08/08/00	SWN-1140-6DR/DT-STANDARD	
ISSUED: [Signature]	DATE: 08/08/00	REFLECTIVE OR NON-REFLECTIVE/ABSORPTIVE RADIAL SOLID STATE SWITCH	
SIZE: A	FRSM NO. 60483	QWG NO. 100-4169-1	REV. -
SCALE: N/S	SHEET: 1 of 3		

**DESCRIPTION:** AMC MODEL S-1140-6DR/DT-DEC-SP IS A SINGLE POLE SIX THROW, REFLECTIVE OR NON-REFLECTIVE/ABSORPTIVE SWITCH MODULE WITH HIGH ISOLATION, LOW LOSS, HIGH SPEED, AND WITH INTEGRAL TTL DRIVER, DESIGNED FOR BROAD BAND OPERATIONS.

**SPECIFICATIONS:**

- FREQUENCY: 0.5 GHz TO 18 GHz
- REFLECTIVE: 3.5db
- ABSORPTIVE: 4.25db
- ISOLATION: 0.5 GHz TO 2 GHz: 60db
- 2 GHz TO 18 GHz: 70db
- VSWR: REFLECTIVE IN/OUT: 2.0:1
- ABSORPTIVE IN/OUT: 2.0:1
- ABSORPTIVE OUT/OFF: 2.0:1
- SPEED: RISE: 10ns TYPICAL, 15ns MAX.
- FALL: 10ns TYPICAL, 15ns MAX.
- DELAY ON: 75ns TYPICAL, 100ns MAX.
- DELAY OFF: 75ns TYPICAL, 100ns MAX.
- POWER INPUT: (CW)+20dBm (STANDARD), +10 dBm (HIGH SPEED)
- SURVIVAL POWER: 1 WATT CW, 10 WATTS PEAK 1 USEC
- CONTROL: TTL LOGIC "0"=ON "1"=OFF
- POWER SUPPLY: +5V @ 300 mA MAX.
- -5V @ 75mA MAX.(REFLECTIVE)
- SIZE: 100mA MAX.(ABSORPTIVE/NON-REFLECTIVE)
- WEIGHT: 1.25" (L) x 1.25" (W) x 0.40" (H)
- 2.0 oz.

**OPTIONS:**

- INDEPENDENT CONTROL WITH SOLDER PIN STANDARD
- DEC-SP 3 BIT DECODER WITH SOLDER PIN
- 10M18 10 MHz TO 18 GHz (INSERTION LOSS INCREASES BY 1.5db AT 10 MHz AND 0.5db AT 18 GHz)
- 100M18 100 MHz TO 18 GHz (INSERTION LOSS INCREASES BY 1.5db AT 100 MHz AND 0.5db AT 18 GHz)
- 118 1 GHz TO 18 GHz (NO CHANGE IN INSERTION LOSS)
- 218 2 GHz TO 18 GHz (NO CHANGE IN INSERTION LOSS)
- 418 4 GHz TO 12.4 GHz (NO CHANGE IN INSERTION LOSS)
- 618 6 GHz TO 18 GHz (NO CHANGE IN INSERTION LOSS)
- 1218 12 GHz TO 18 GHz (NO CHANGE IN INSERTION LOSS)
- 100M20 100 MHz TO 20 GHz (INSERTION LOSS INCREASES BY 1.5db AT 100 MHz AND 1.0db AT 20 GHz)
- 220 2 GHz TO 20 GHz (INSERTION LOSS INCREASES BY 1.0db AT 20 GHz)
- 1020 10 GHz TO 20 GHz (INSERTION LOSS INCREASES BY 1.0db AT 20 GHz)
- B01 -12V POWER SUPPLIES
- B02 -15V POWER SUPPLIES
- B03 REVERSE LOGIC "1"=ON "0"=OFF
- B04 DRIVERLESS, CURRENT CONTROLLED
- B05 HIGH SPEED, TURNON/TURNOFF 20 nsec MAXIMUM WHEN APPLICABLE OR OPTION HS
- B06 HIGH POWER - SPECIFY CW POWER, PEAK POWER, PULSE WIDTH, DUTY CYCLE, RF FREQUENCY AND BANDWIDTH
- B07 CUSTOM DESIGNED PRODUCT- SPECIFY INITIALS OF CUSTOMER
- B08 LOW VIDEO TRANSIENTS - SPECIFY VIDEO BANDWIDTH
- B09 LOW INSERTION LOSS VERSION
- B10 HIGHER ISOLATION VERSION
- B11 0.70" THICK VERSION
- B12 0.68" THICK VERSION



**ENVIRONMENTAL RATINGS:**

- TEMPERATURE: -55°C TO +85°C (OPERATING)
- -65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A


NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

MOUNTING SURFACE  
GP=GOLD PLATED  
P=PAINTED

Ø0.089 THRU W/4-40 THD  
0.250 DEEP ON MOUNTING SURFACE  
LOCATED ON 1.00" CIRCLE, 2 PLACES

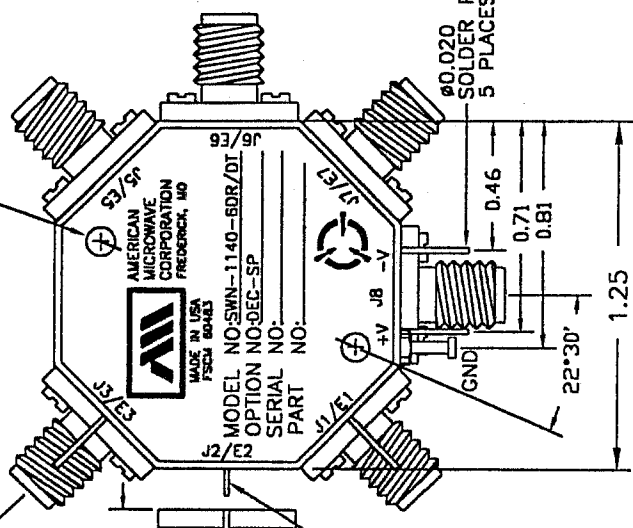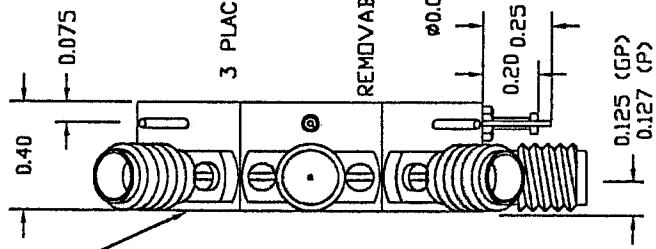

BLOCK DIAGRAM

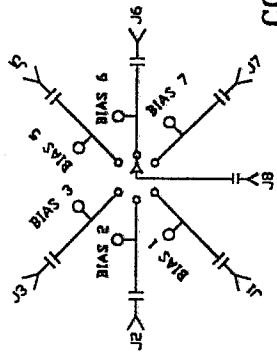

E1	E2	E3	PATH ON	J1	J2	J3	J5	J6	J7
L	L	L	L	L	L	L	L	L	L
H	L	L	L	L	L	L	L	L	L
L	H	L	L	L	L	L	L	L	L
H	H	L	L	L	L	L	L	L	L
L	L	H	L	L	L	L	L	L	L
H	L	H	L	L	L	L	L	L	L

ALL DIMENSIONS ARE IN INCHES  
TOLERANCES: X.XX ±0.020  
X.XXX ±0.010

CONFIDENTIAL AND PROPRIETARY

CONTRACT NO.		AMERICAN MICROWAVE CORPORATION FREDERICK, MARYLAND	
APPROVALS	DATE	TITLE	
DESIGNED	08/08/00	SWN-1140-6DR/DT-DEC-SP	
CHECKED	08/08/00	REFLECTIVE OR NON-REFLECTIVE/ABSORPTIVE	
ISSUED	08/08/00	RADIAL SOLID STATE SWITCH	
SIZE	FSCAL NO.	QWG NO.	REV.
A	60483	100-4169-2	-
SCALE	N/S	SHEET	1 of 3






### SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

#### INSERTION LOSS & RETURN LOSS\*

J8-J1

CH1: A -M REF - 2.35 dB 1.0 dB/ REF - 3.00 dB  
 CH2: B -M REF - 17.88 dB 5.0 dB/ REF - 9.54 dB

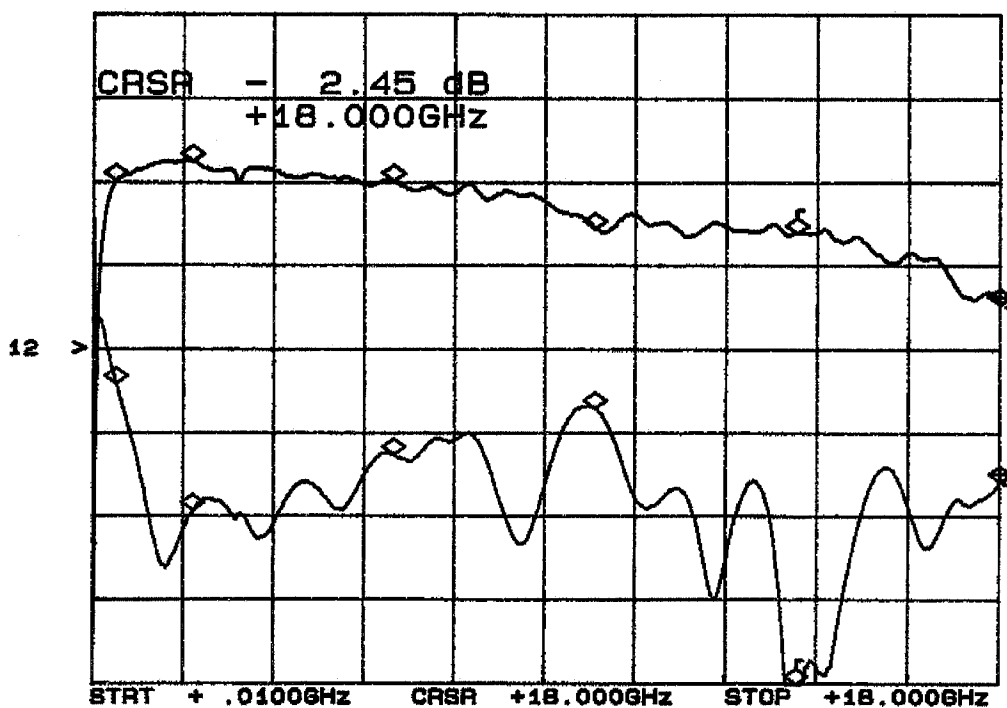

\*J8: INPUT ARM

FREQUENCY	INSERTION LOSS	RETURN LOSS
0.5 GHz	0.98 dB	11.5 dB
2.0 GHz	0.73 dB	19.1 dB
6.0 GHz	0.97 dB	15.7 dB
10.0 GHz	1.54 dB	12.9 dB
14.0 GHz	1.60 dB	33.4 dB
18.0 GHz	2.45 dB	17.8 dB




### SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

#### INSERTION LOSS & RETURN LOSS\*

J8-J2

CH1: A -M REF - 2.28 dB 1.0 dB/ REF - 3.00 dB  
 CH2: B -M REF - 20.76 dB 5.0 dB/ REF - 9.54 dB

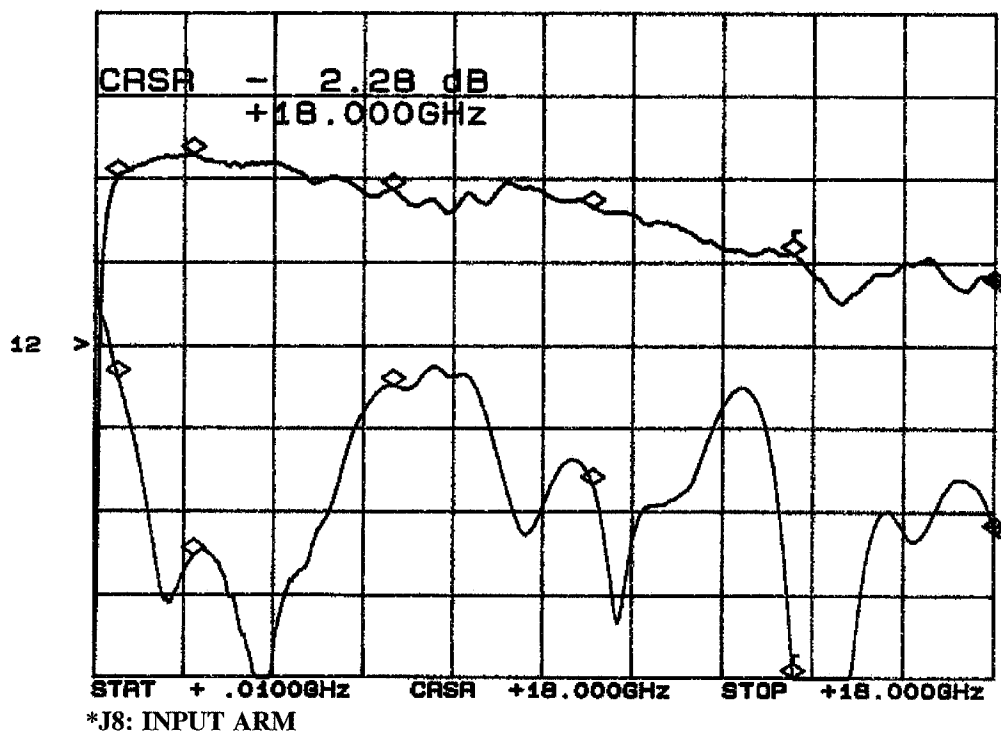

FREQUENCY	INSERTION LOSS	RETURN LOSS
0.5 GHz	0.98 dB	11.4 dB
2.0 GHz	0.71 dB	22.0 dB
6.0 GHz	1.13 dB	11.8 dB
10.0 GHz	1.33 dB	17.6 dB
14.0 GHz	1.87 dB	29.9 dB
18.0 GHz	2.28 dB	20.7 dB

JUNE 23, 1999

PAGE 10




### SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

#### INSERTION LOSS & RETURN LOSS\*

J8-J3

CH1: A -M - 1.96 dB      CH2: B -M - 40.14 dB  
 1.0 dB/ REF - 3.00 dB      5.0 dB/ REF - 9.54 dB

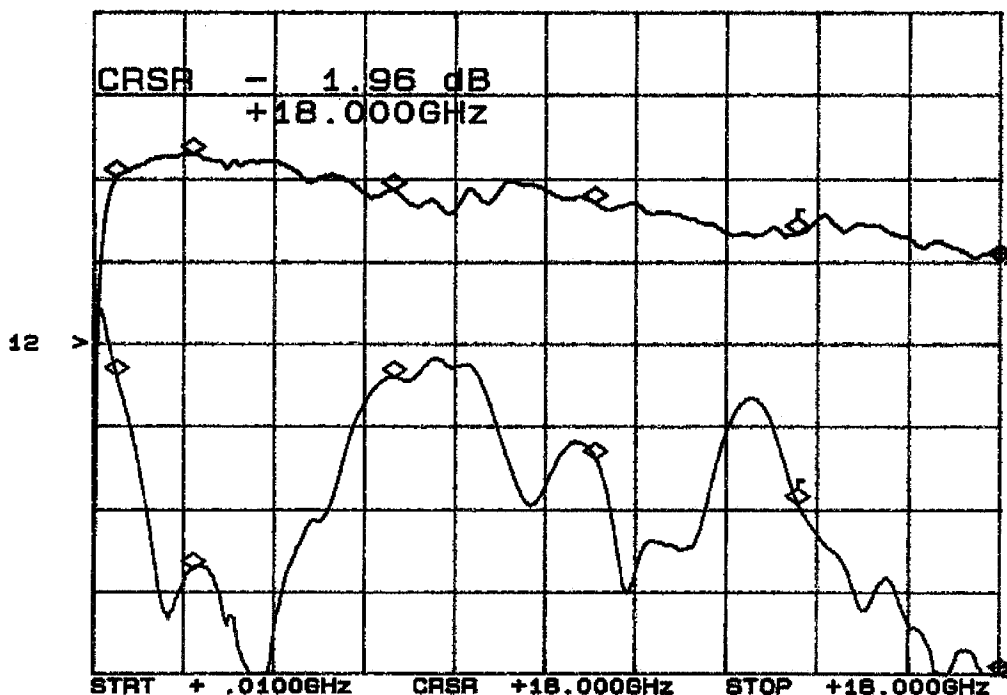

\*J8: INPUT ARM

FREQUENCY	INSERTION LOSS	RETURN LOSS
0.5 GHz	0.98 dB	11.4 dB
2.0 GHz	0.70 dB	22.8 dB
6.0 GHz	1.11 dB	11.5 dB
10.0 GHz	1.28 dB	16.3 dB
14.0 GHz	1.64 dB	19.0 dB
18.0 GHz	1.96 dB	40.1 dB




## SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

### INSERTION LOSS & RETURN LOSS\*

J8-J5

CH1: A -M - 2.17 dB      CH2: B -M - 21.13 dB  
 1.0 dB/ REF - 3.00 dB      5.0 dB/ REF - 9.54 dB

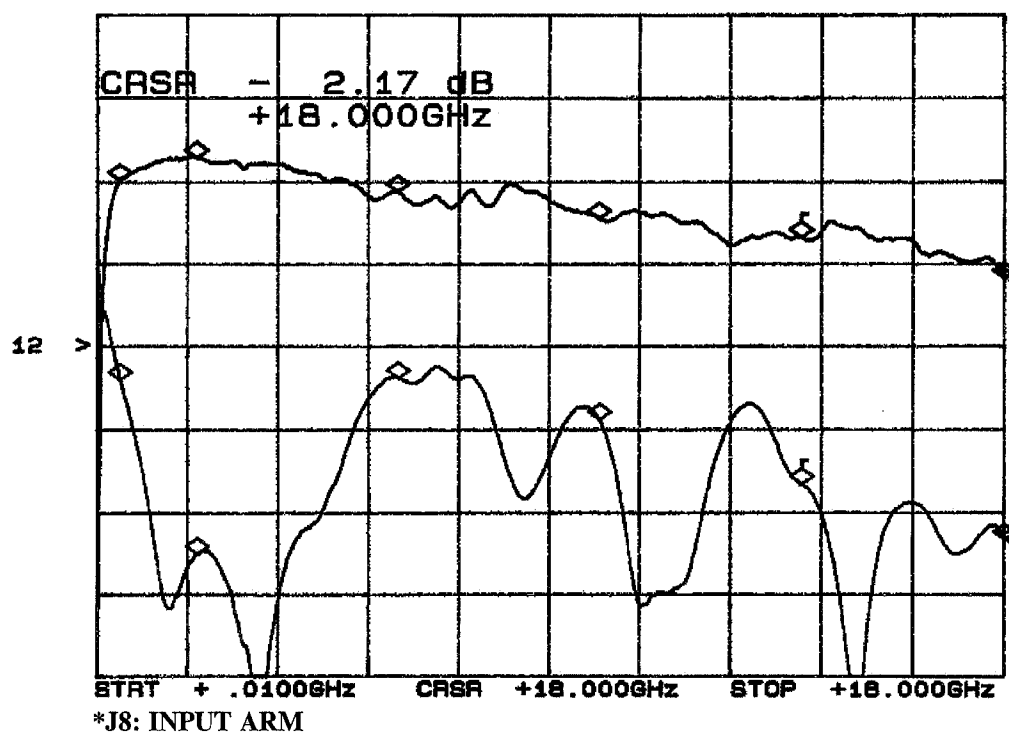

FREQUENCY	INSERTION LOSS	RETURN LOSS
0.5 GHz	0.97 dB	11.4 dB
2.0 GHz	0.69 dB	21.8 dB
6.0 GHz	1.11 dB	11.3 dB
10.0 GHz	1.44 dB	13.9 dB
14.0 GHz	1.66 dB	17.8 dB
18.0 GHz	2.17 dB	21.1 dB

JUNE 23, 1999

PAGE 12




## SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

### INSERTION LOSS & RETURN LOSS\*

J8-J6

CH1: A -M REF - 2.28 dB 1.0 dB/ REF - 3.00 dB  
 CH2: B -M REF - 19.71 dB 5.0 dB/ REF - 9.54 dB

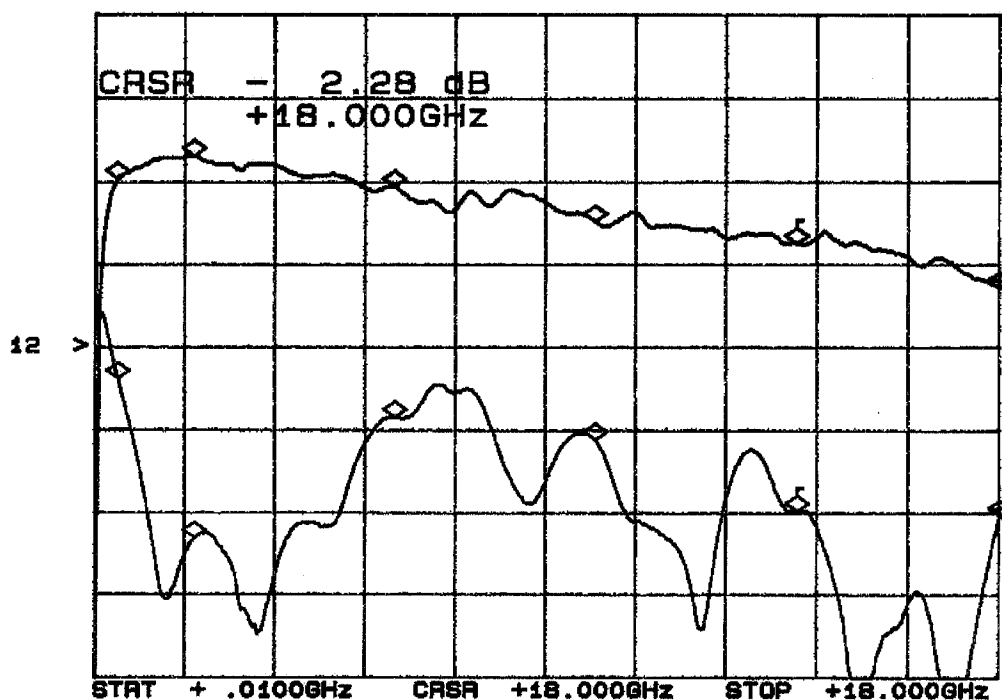

\*J8: INPUT ARM

FREQUENCY	INSERTION LOSS	RETURN LOSS
0.5 GHz	0.95 dB	11.4 dB
2.0 GHz	0.67 dB	21.0 dB
6.0 GHz	1.04 dB	13.7 dB
10.0 GHz	1.48 dB	15.1 dB
14.0 GHz	1.73 dB	19.3 dB
18.0 GHz	2.28 dB	19.7 dB

JUNE 23, 1999

PAGE 13




### SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

#### INSERTION LOSS & RETURN LOSS\*

J8-J7

CH1: A -M REF = 2.32 dB      CH2: B -M REF = 19.70 dB  
 1.0 dB/ REF = 3.00 dB      5.0 dB/ REF = 9.54 dB

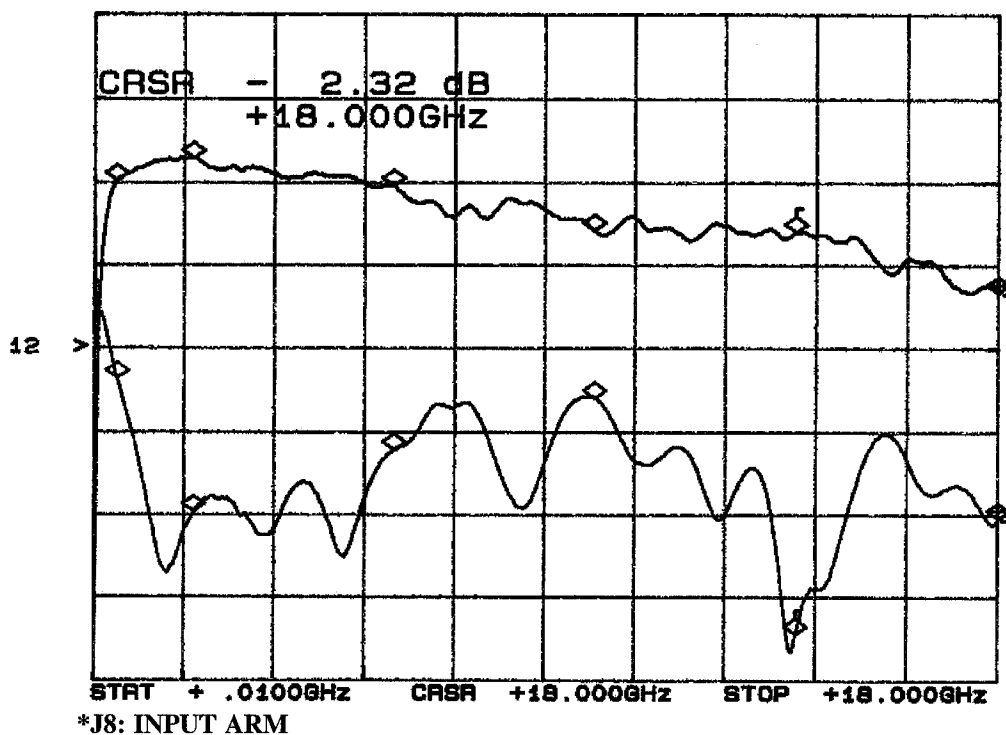

FREQUENCY	INSERTION LOSS	RETURN LOSS
0.5 GHz	0.97 dB	11.3 dB
2.0 GHz	0.70 dB	19.3 dB
6.0 GHz	1.03 dB	15.5 dB
10.0 GHz	1.57 dB	12.4 dB
14.0 GHz	1.59 dB	26.8 dB
18.0 GHz	2.32 dB	19.7 dB



## SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

### ISOLATION\*

(AS MEASURED ON A SPECTRUM ANALYZER)

FREQUENCY	J1	J2	J3	J5	J6	J7
500 MHZ	98 dB	92 dB	90 dB	96 dB	94 dB	90 dB
1 GHz	90 dB	92 dB	89 dB	102 dB	102 dB	88 dB
2 GHz	90 dB	90 dB	102 dB	100 dB	100 dB	88 dB
4 GHz	82 dB	85 dB	94 dB	94 dB	92 dB	84 dB
6 GHz	78 dB	80 dB	90 dB	92 dB	90 dB	80 dB
8 GHz	72 dB	80 dB	86 dB	84 dB	82 dB	75 dB
10 GHz	68 dB	73 dB	86 dB	80 dB	78 dB	70 dB
12 GHz	67 dB	72 dB	78 dB	76 dB	74 dB	70 dB
14 GHz	68 dB	64 dB	72 dB	66 dB	66 dB	60 dB
16 GHz	60 dB	62 dB	66 dB	62 dB	62 dB	58 dB
18 GHz	40 dB	38 dB	56 dB	60 dB	62 dB	56 dB

\* J8: INPUT ARM


JUNE 23, 1999



## SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

**ISOLATION\***  
 (AS MEASURED ON A SPECTRUM ANALYZER)  
**J8-J1**

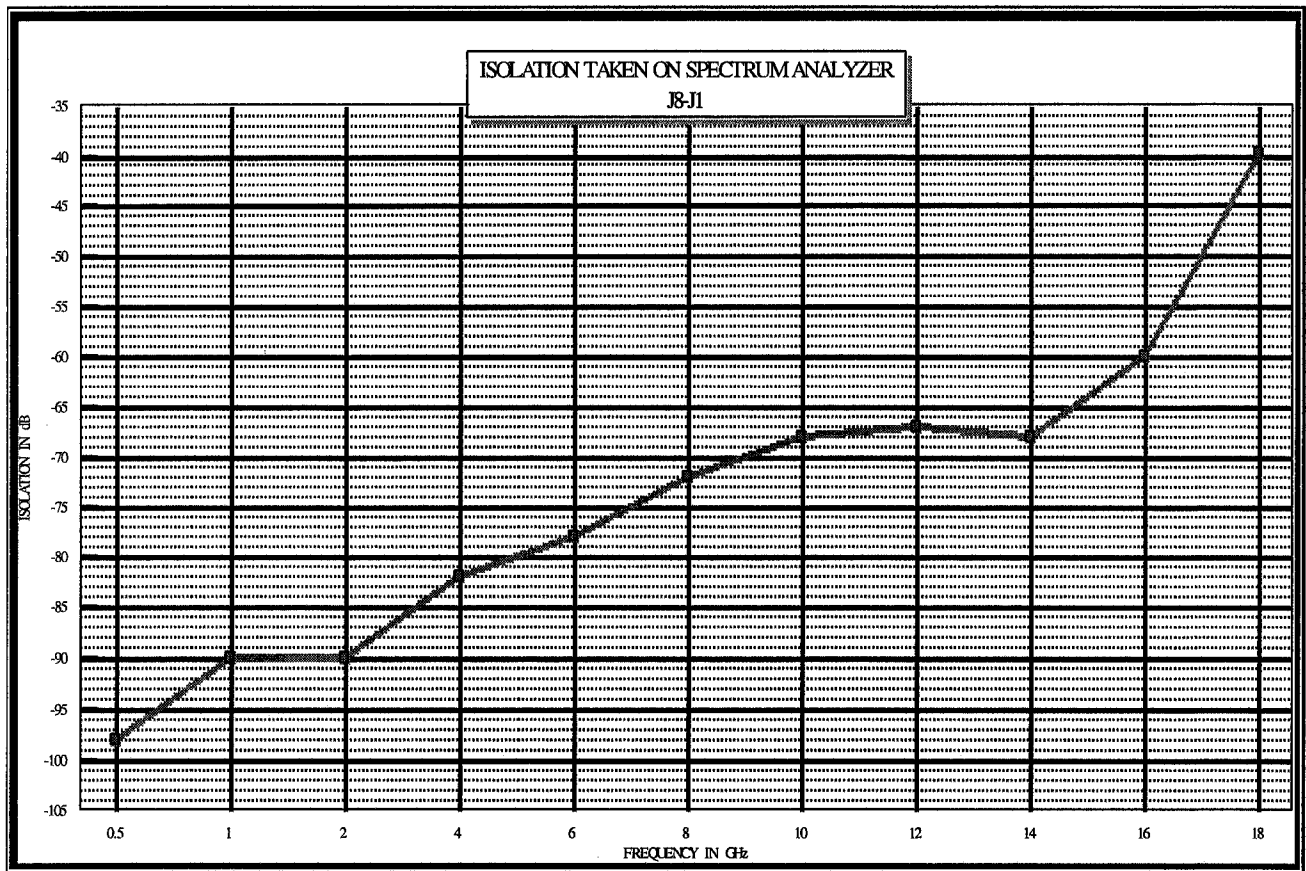

\*J8: INPUT ARM

JUNE 23, 1999






# SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

**ISOLATION\***  
 (AS MEASURED ON A SPECTRUM ANALYZER)  
**J8-J2**

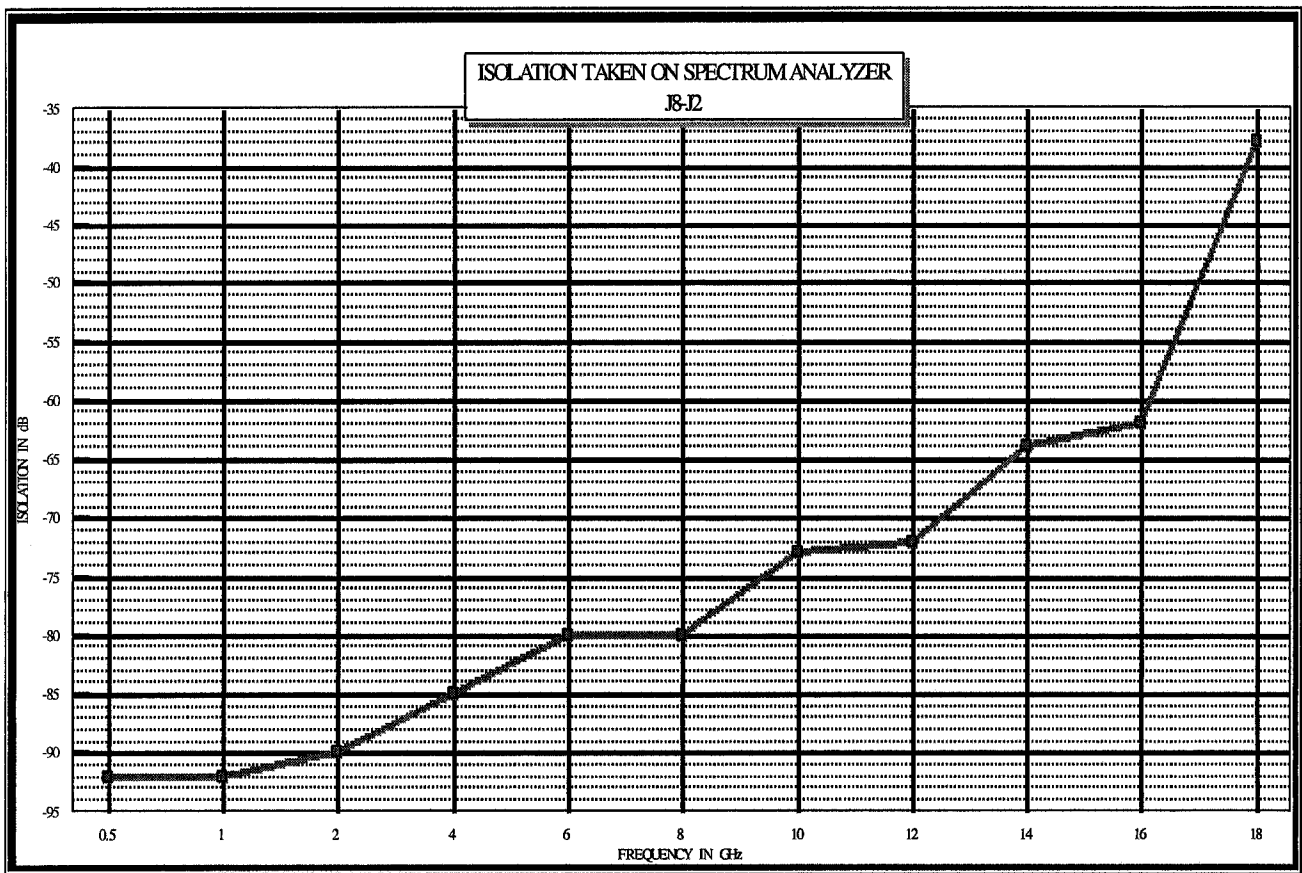

\*J8: INPUT ARM


JUNE 23, 1999



# SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

**ISOLATION\***  
 (AS MEASURED ON A SPECTRUM ANALYZER)  
**J8-J3**

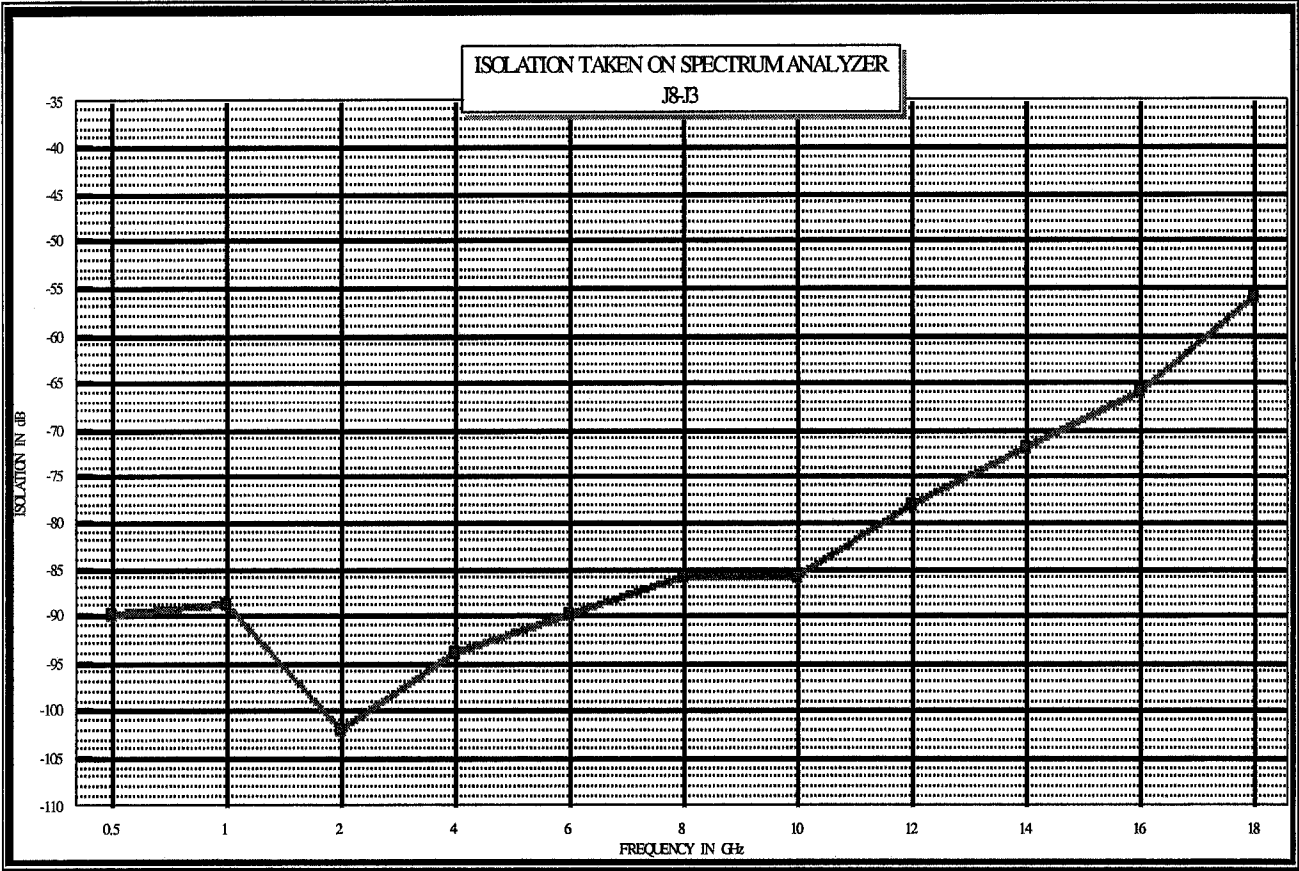

\*J8: INPUT ARM


JUNE 23, 1999



# SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

**ISOLATION\***  
 (AS MEASURED ON A SPECTRUM ANALYZER)  
**J8-J5**

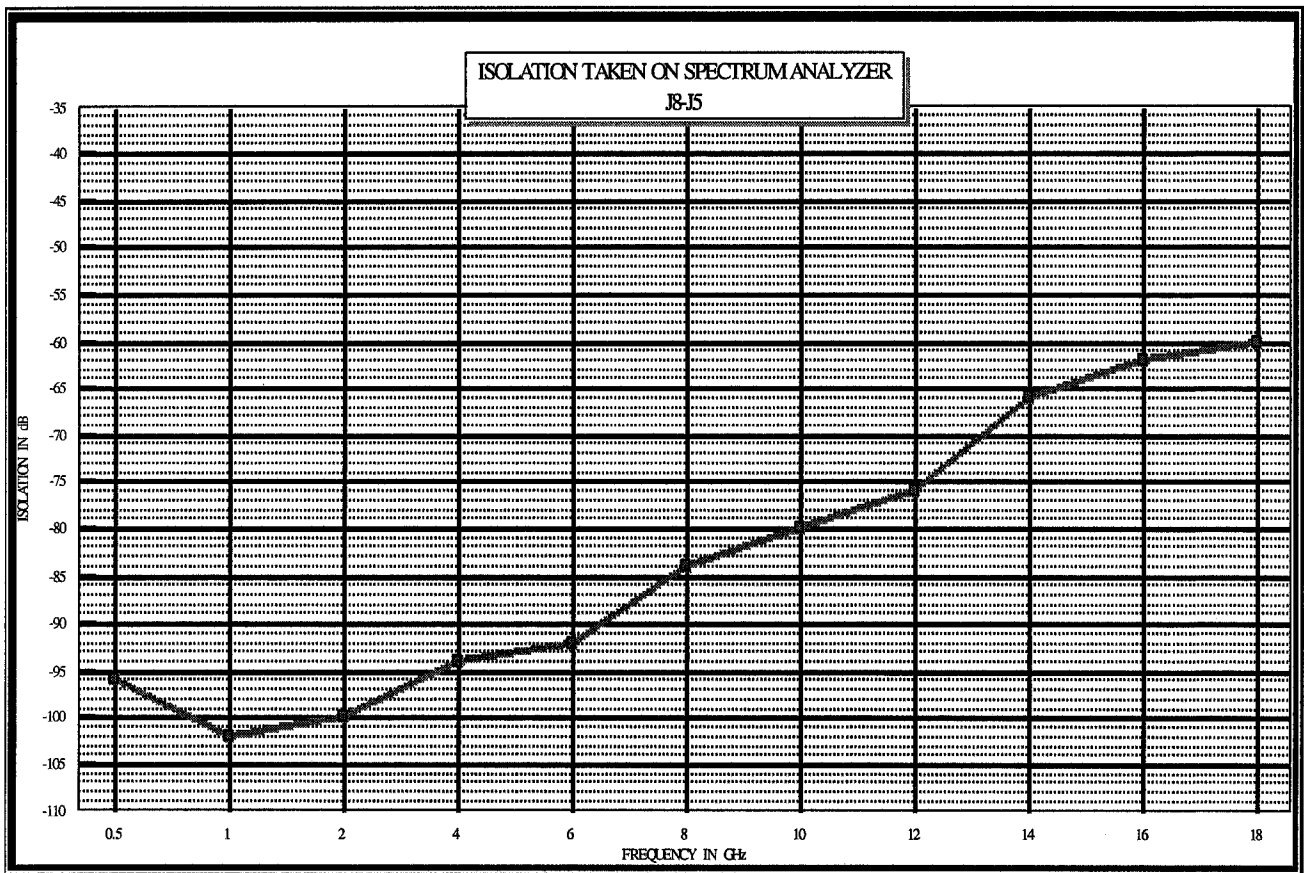

\*J8: INPUT ARM


JUNE 23, 1999



## SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

**ISOLATION\***  
 (AS MEASURED ON A SPECTRUM ANALYZER)  
**J8-J6**

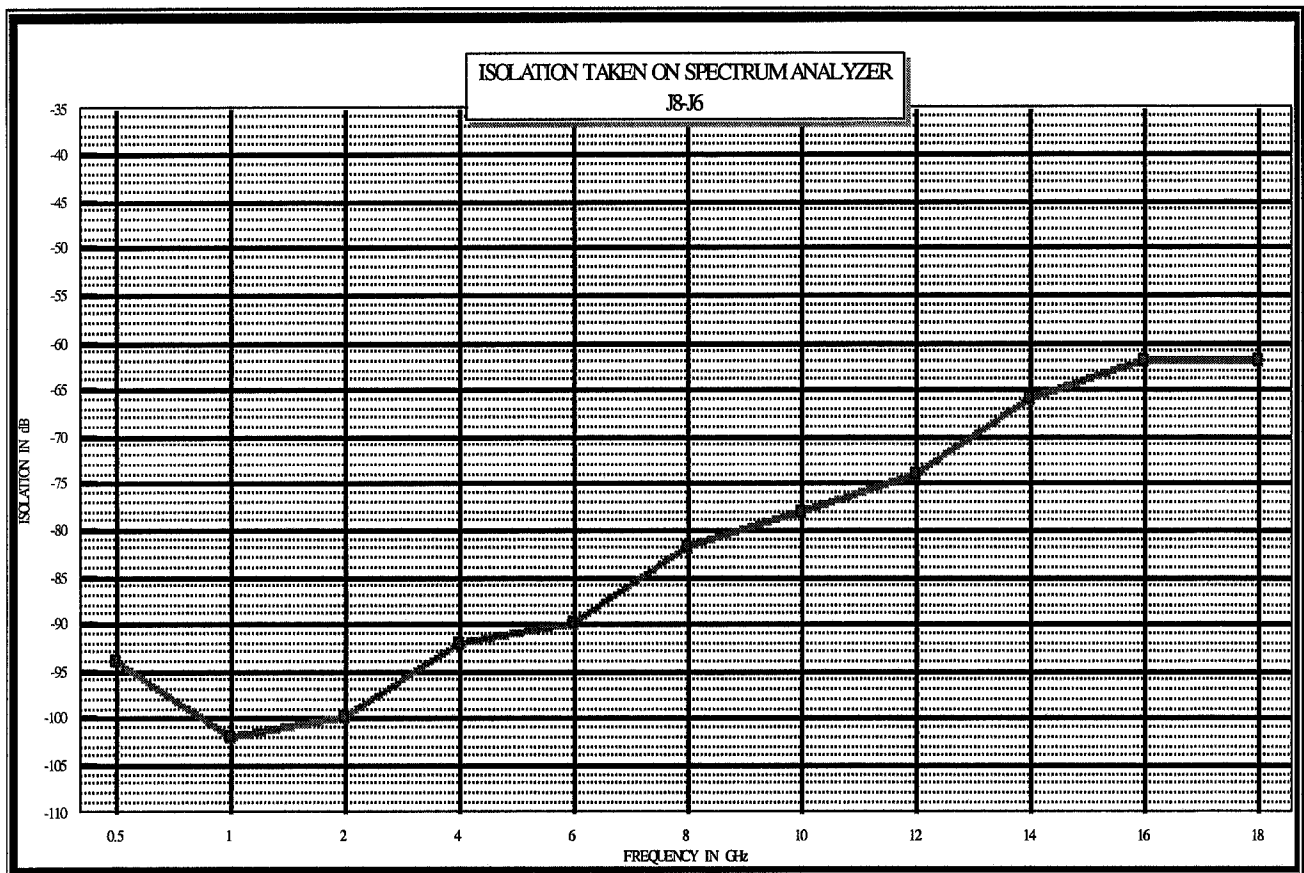

\*J8: INPUT ARM


JUNE 23, 1999



# SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

**ISOLATION\***  
 (AS MEASURED ON A SPECTRUM ANALYZER)  
**J8-J7**

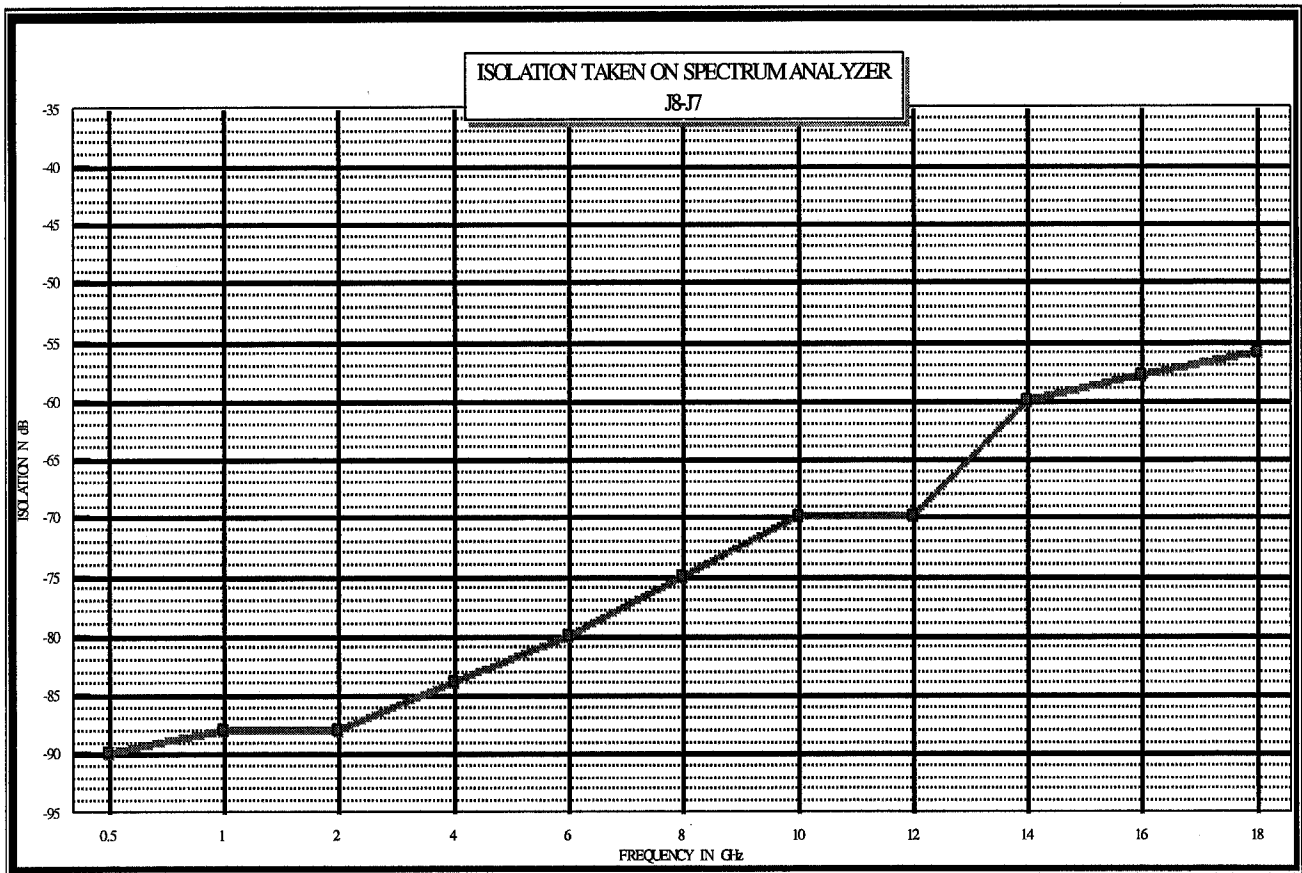

\*J8: INPUT ARM

JUNE 23, 1999



**TEST DATA**

**FROM**

**100 MHz TO 2 GHz**

**SP6T**

**RADIAL SOLID STATE SWITCH**  
**(SURFACE MOUNTABLE)**

**AMC MODEL No:**  
**SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10**  
**(Serial Number: 6MS90495)**

**REPORTED AND PREPARED**  
**BY**  
**RENE AFABLE**

**JUNE 23, 1999**




## SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

### INSERTION LOSS & RETURN LOSS\*

J8-J1

CH1: A --M REF = 3.73 dB      CH2: B --M REF = 18.93 dB  
 1.0 dB/ REF = 3.00 dB      5.0 dB/ REF = 9.54 dB

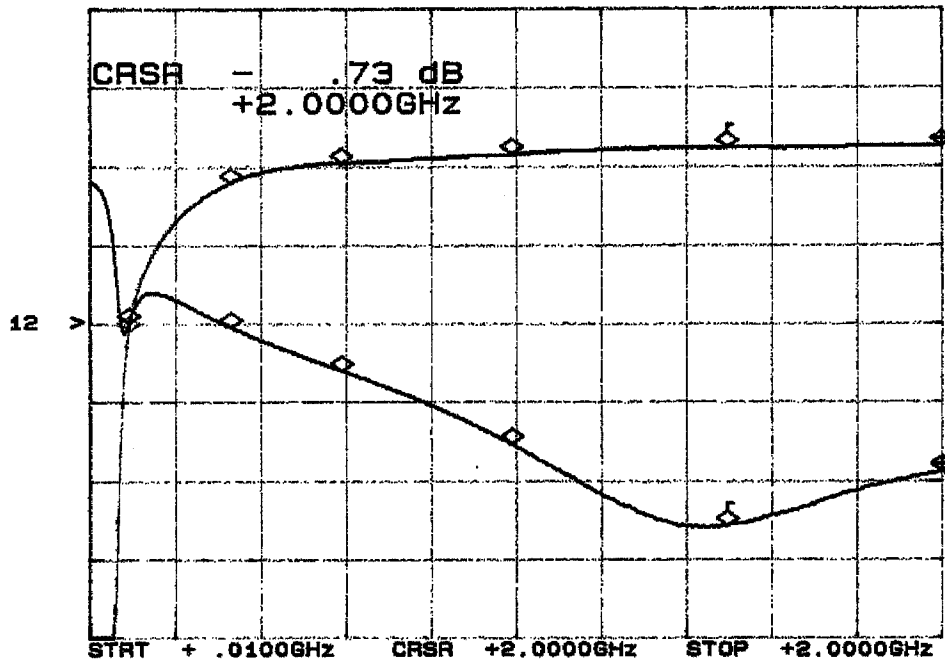

\*J8: INPUT ARM

FREQUENCY	INSERTION LOSS	RETURN LOSS
100 MHz	3.09 dB	9.45 dB
340 MHz	1.19 dB	9.76 dB
600 MHz	0.95 dB	12.5 dB
1.0 GHz	0.84 dB	17.2 dB
1.5 GHz	0.75 dB	22.2 dB
2.0 GHz	0.73 dB	18.9 dB

JUNE 23, 1999

PAGE 23




### SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

#### INSERTION LOSS & RETURN LOSS\*

J8-J2

CH1: A -M REF - .72 dB      CH2: B -M REF - 21.81 dB  
 1.0 dB/      3.00 dB      5.0 dB/      9.54 dB

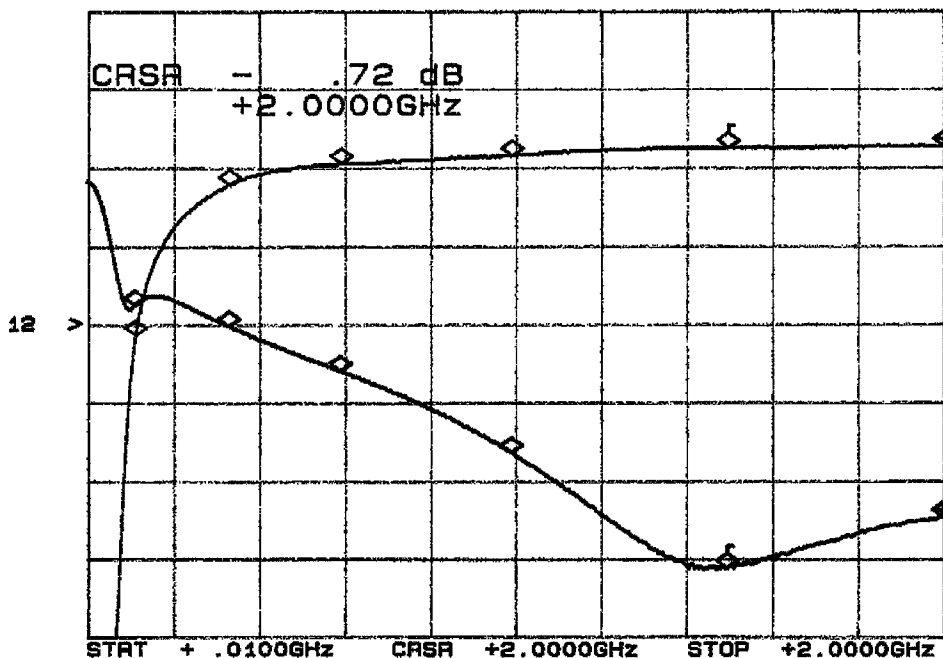

\*J8: INPUT ARM

FREQUENCY	INSERTION LOSS	RETURN LOSS
100 MHz	3.13 dB	8.25 dB
340 MHz	1.20 dB	9.63 dB
600 MHz	0.95 dB	12.5 dB
1.0 GHz	0.83 dB	17.6 dB
1.5 GHz	0.73 dB	24.8 dB
2.0 GHz	0.72 dB	21.8 dB






### SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

#### INSERTION LOSS & RETURN LOSS\*

J8-J3

CH1: A -M REF = 3.70 dB      CH2: B -M REF = 22.56 dB  
 1.0 dB/ REF = 3.00 dB      5.0 dB/ REF = 9.54 dB

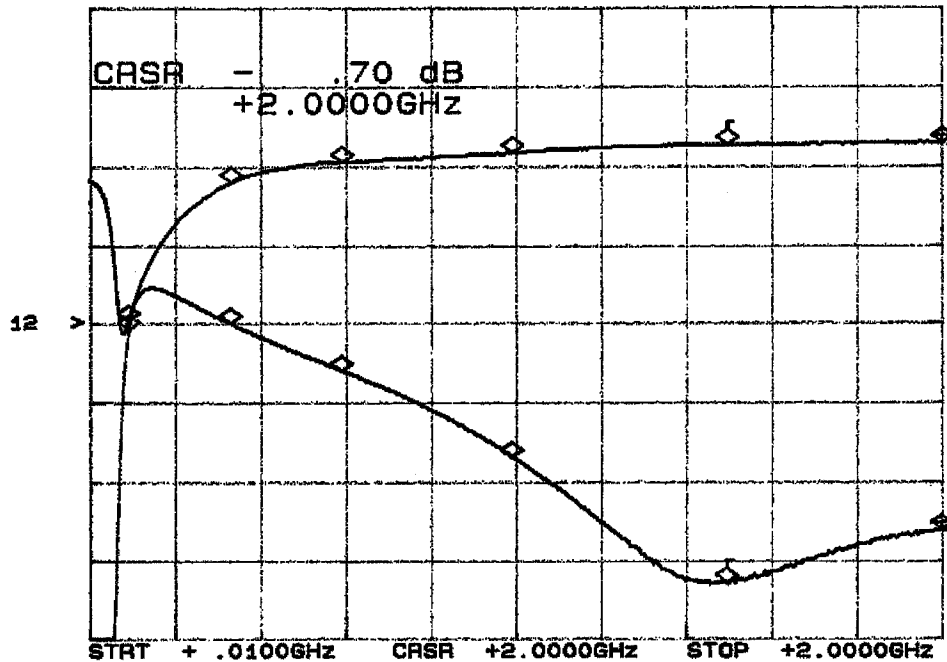

\*J8: INPUT ARM

FREQUENCY	INSERTION LOSS	RETURN LOSS
100 MHz	3.08 dB	9.27 dB
340 MHz	1.18 dB	9.53 dB
600 MHz	0.93 dB	12.5 dB
1.0 GHz	0.82 dB	17.9 dB
1.5 GHz	0.71 dB	25.8 dB
2.0 GHz	0.70 dB	22.5 dB




### SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

#### INSERTION LOSS & RETURN LOSS\*

J8-J5

CH1: A -M REF - .68 dB      CH2: B -M REF - 21.60 dB  
 1.0 dB/ REF - 3.00 dB      5.0 dB/ REF - 9.54 dB

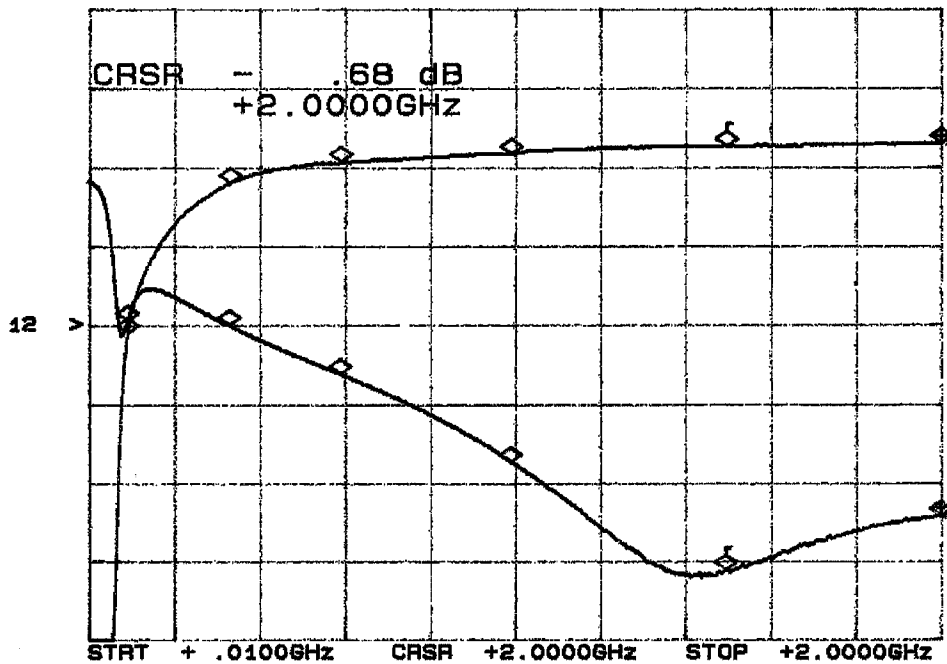

\*J8: INPUT ARM

FREQUENCY	INSERTION LOSS	RETURN LOSS
100 MHz	3.09 dB	9.17 dB
340 MHz	1.18 dB	9.54 dB
600 MHz	0.92 dB	12.5 dB
1.0 GHz	0.81 dB	18.1 dB
1.5 GHz	0.71 dB	25.2 dB
2.0 GHz	0.68 dB	21.6 dB




### SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

#### INSERTION LOSS & RETURN LOSS\*

J8-J6

CH1: A -M REF - .69 dB 1.0 dB/ REF - 3.00 dB  
 CH2: B -M REF - 20.71 dB 5.0 dB/ REF - 9.54 dB

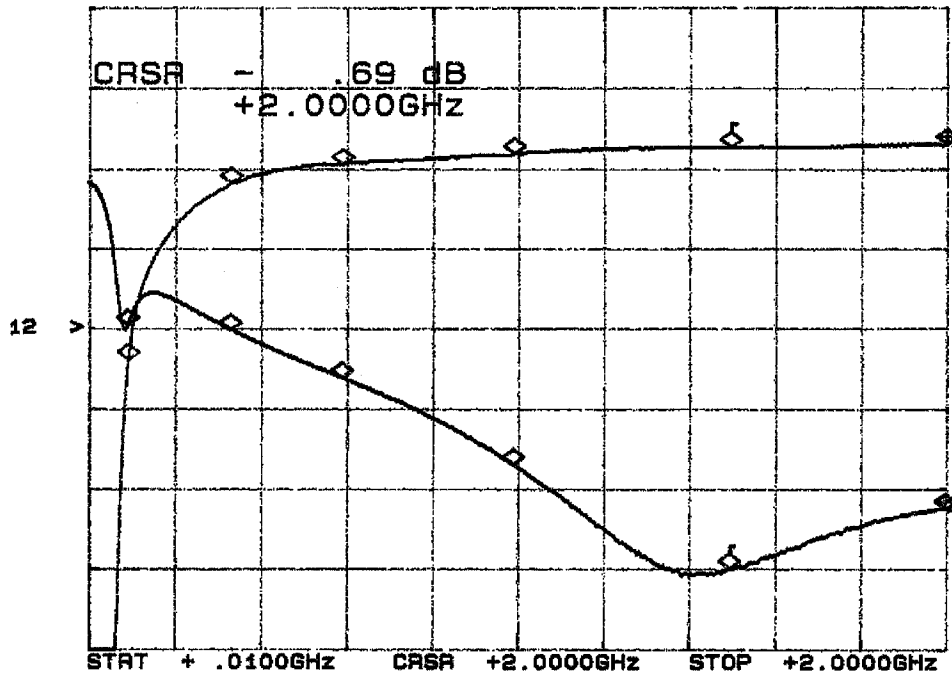

\*J8: INPUT ARM

FREQUENCY	INSERTION LOSS	RETURN LOSS
100 MHz	3.37 dB	9.32 dB
340 MHz	1.18 dB	9.55 dB
600 MHz	0.92 dB	12.5 dB
1.0 GHz	0.80 dB	17.9 dB
1.5 GHz	0.71 dB	24.4 dB
2.0 GHz	0.69 dB	20.7 dB




## SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

### INSERTION LOSS & RETURN LOSS\*

J8-J7

CH1: A -M REF = 3.70 dB      CH2: B -M REF = 19.07 dB  
 1.0 dB/ REF = 3.00 dB      5.0 dB/ REF = 9.54 dB

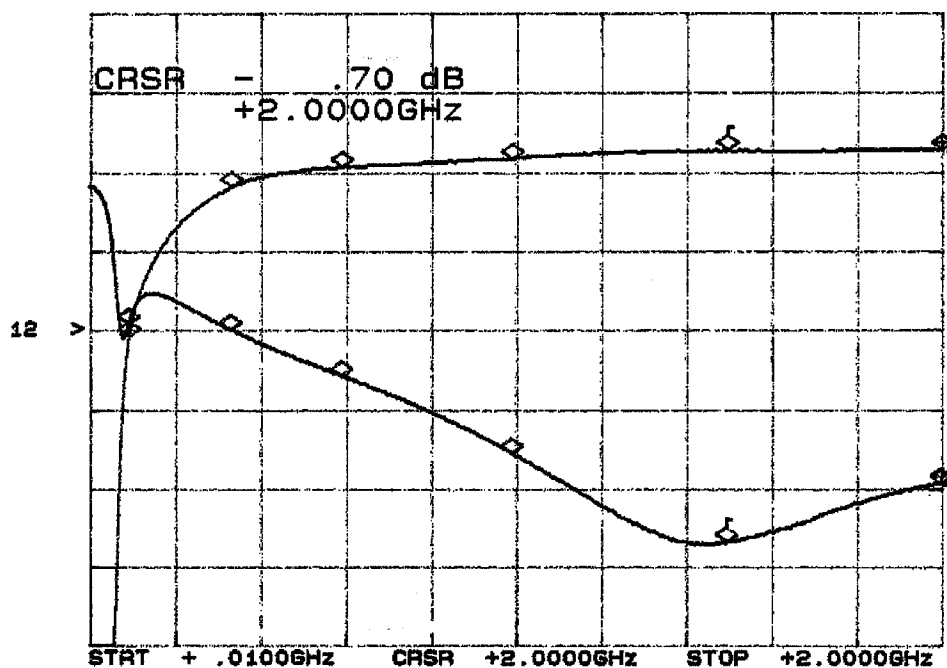

\*J8: INPUT ARM

FREQUENCY	INSERTION LOSS	RETURN LOSS
100 MHz	3.07 dB	9.06 dB
340 MHz	1.17 dB	9.47 dB
600 MHz	0.92 dB	12.3 dB
1.0 GHz	0.81 dB	17.1 dB
1.5 GHz	0.71 dB	22.8 dB
2.0 GHz	0.70 dB	18.0 dB

JUNE 23, 1999

PAGE 28



## SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

### SWITCHING SPEED


"Rise/Fall" Time: 10% RF to 90% RF & 90% RF to 10% RF  
 "On/Off" Time: 50% TTL to 90% RF or 10% RF

### TYPICAL OF ALL ARMS

"DELAY ON": 54 nS  
 "RISE TIME": 9 nS

HORIZONTAL SCALE:  
 20 nS PER DIVISION


VERTICAL SCALE:  
 10 mV PER DIVISION

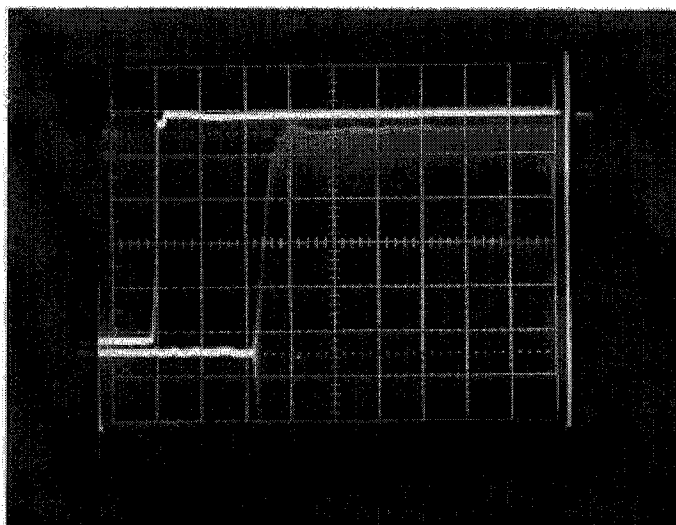

"DELAY OFF": 36 nS  
 "FALL TIME": 5 nS

HORIZONTAL SCALE:  
 20 nS PER DIVISION

VERTICAL SCALE:  
 10 mV PER DIVISION

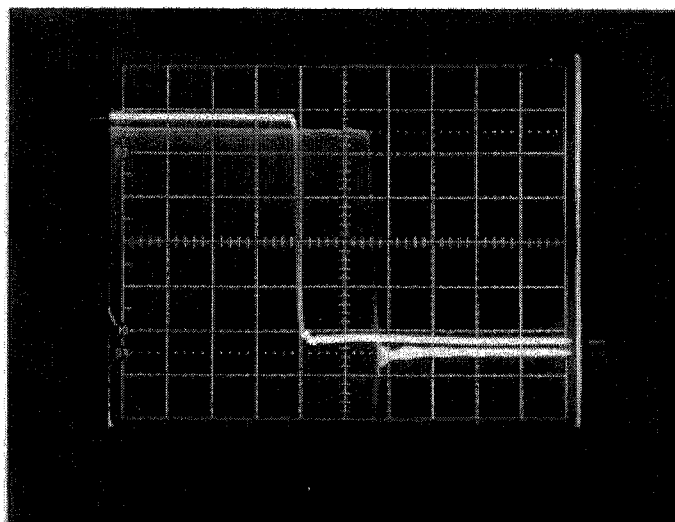

JUNE 23, 1999



## SUMMARY TEST DATA

<b>MODEL NUMBER</b>	<b>: SWN-1140-6DR-DEC-SP OPTION 0518, FM10</b>
<b>SERIAL NUMBER</b>	<b>: 6MS90495</b>
<b>ENGINEER</b>	<b>: RENE AFABLE</b>
<b>VOLTAGE &amp; CURRENT DRAW</b>	<b>: +5vdc: +313mA; -12vdc: -44mA</b>


### VIDEO TRANSIENTS

TYPICAL OF ALL ARMS

**≤320 mV P-P**  
**MEASURED IN A**  
**300 MHZ BANDWIDTH**

**VERTICAL SCALE:**  
**100 mV PER DIVISION**


**HORIZONTAL SCALE:**  
**50 nS PER DIVISION**

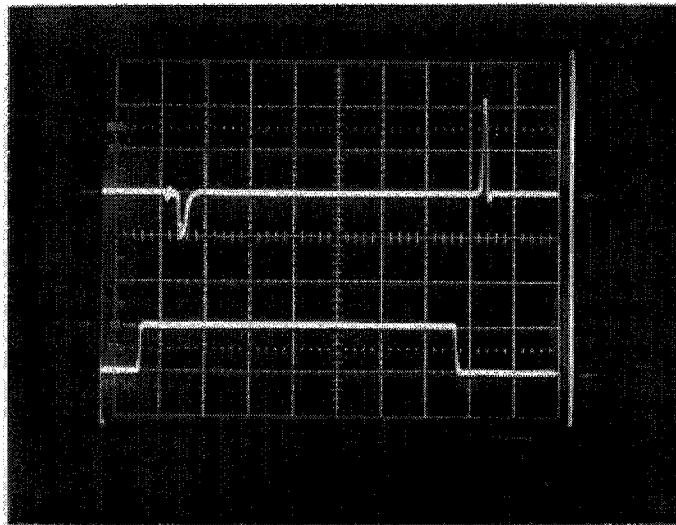

**≤100 mV P-P**  
**MEASURED IN A**  
**20 MHZ BANDWIDTH**

**VERTICAL SCALE:**  
**20 mV PER DIVISION**

**HORIZONTAL SCALE:**  
**20 nS PER DIVISION**

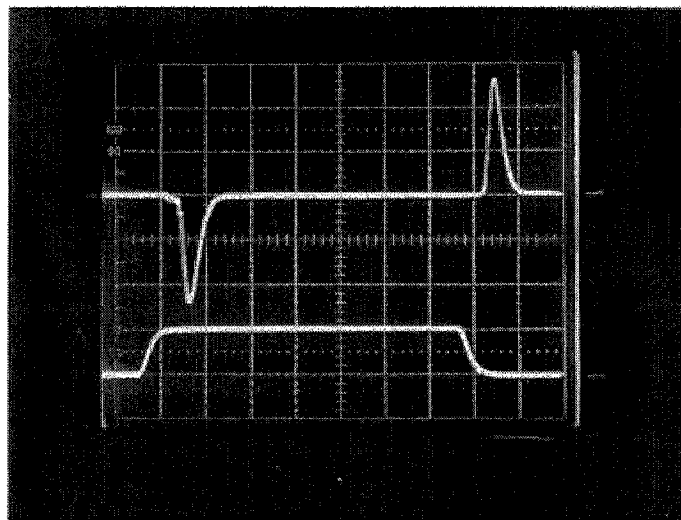

JUNE 23, 1999



**APPENDIX A**  
**MISCELLANEOUS**  
**TEST DATA AND PLOTS**  
**ON**  
**ISOLATION**  
**AS**  
**MEASURED**  
**ON A SCALAR NETWORK**  
**ANALYZER**  
**(NOISE FLOOR OF SCALAR NETWORK ANALYZER IS -70 dB)**  
**ON A**  
**SP6T**  
**RADIAL SOLID STATE SWITCH**  
**(SURFACE MOUNTABLE)**  
**AMC MODEL No:**  
**SWN-1140-6DR-DEC-SP OPTION 0518, FM10**  
**(Serial Number: 6MS90495)**  
**FROM 500 MHz TO 18 GHz**  
**AND**  
**FROM 100 MHz TO 2 GHz**

**JUNE 23, 1999**



## SUMMARY TEST DATA


**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

### ISOLATION\*

(AS MEASURED ON A SCALAR NETWORK ANALYZER)

J8-J1

CH1: A -M - 39.10 dB  
 20.0 dB/ REF - 80.00 dB

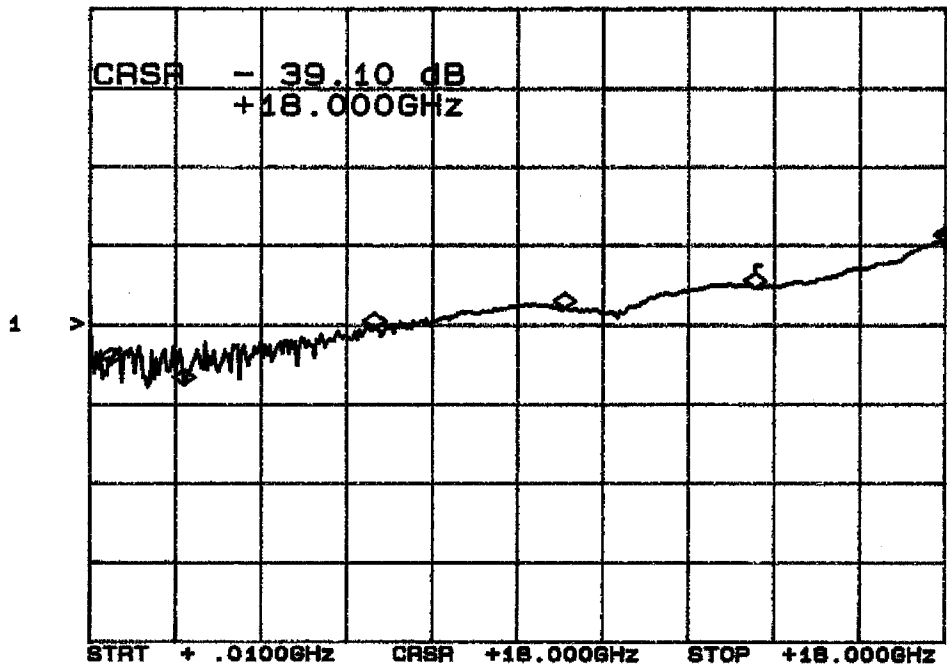

\*J8: INPUT ARM

FREQUENCY	ISOLATION
0.5 GHz	70.2 dB
2.0 GHz	73.0 dB
6.0 GHz	60.4 dB
10.0 GHz	55.7 dB
14.0 GHz	50.2 dB
18.0 GHz	39.1 dB

JUNE 23, 1999






### SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

**ISOLATION\***  
 (AS MEASURED ON A SCALAR NETWORK ANALYZER)  
 J8-J2

CH1: A -M - 40.31 dB  
 20.0 dB/ REF - 60.00 dB

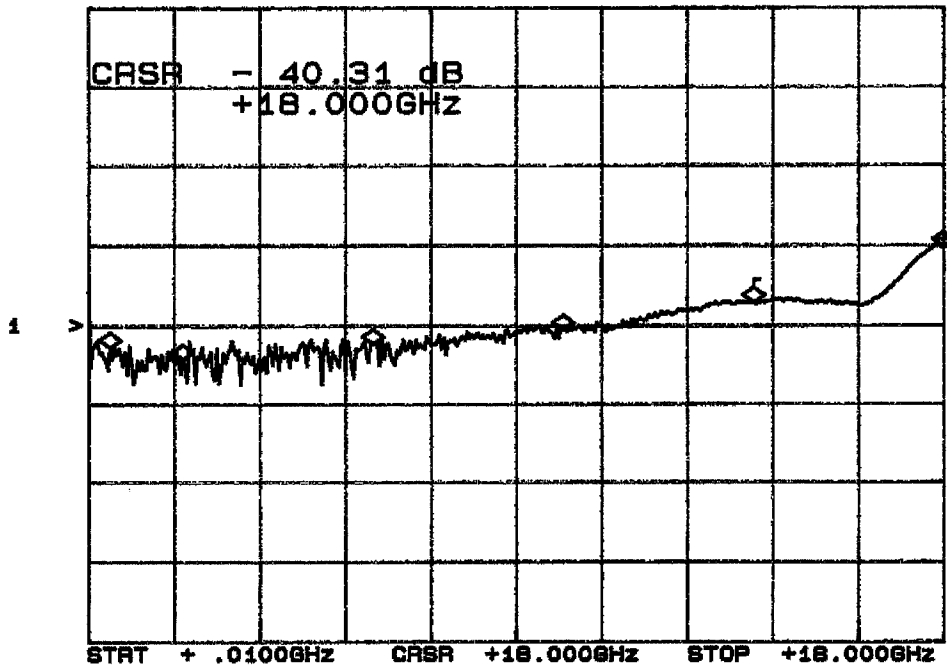

\*J8: INPUT ARM

FREQUENCY	ISOLATION
0.5 GHz	64.5 dB
2.0 GHz	66.1 dB
6.0 GHz	64.5 dB
10.0 GHz	61.4 dB
14.0 GHz	54.1 dB
18.0 GHz	40.3 dB

JUNE 23, 1999




### SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

**ISOLATION\***  
 (AS MEASURED ON A SCALAR NETWORK ANALYZER)  
 J8-J3

CH1: A -M - 50.88 dB  
 20.0 dB/ REF - 80.00 dB

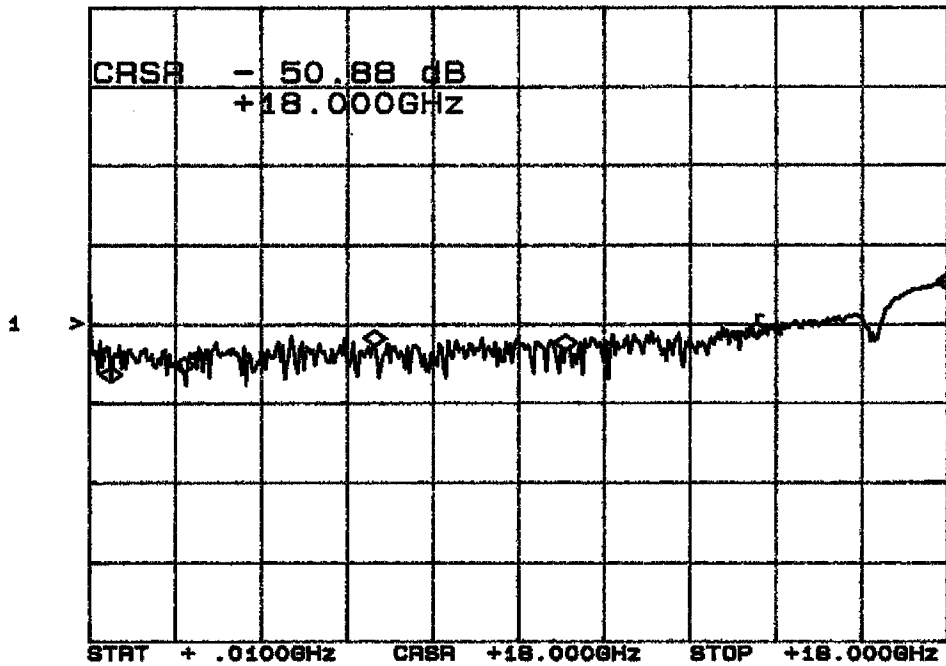

\*J8: INPUT ARM

FREQUENCY	ISOLATION
0.5 GHz	72.0 dB
2.0 GHz	71.8 dB
6.0 GHz	67.3 dB
10.0 GHz	63.6 dB
14.0 GHz	61.9 dB
18.0 GHz	50.8 dB

JUNE 23, 1999




### SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

**ISOLATION\***  
 (AS MEASURED ON A SCALAR NETWORK ANALYZER)  
 J8-J5

CH1: A -M - 49.96 dB  
 20.0 dB/ REF - 60.00 dB

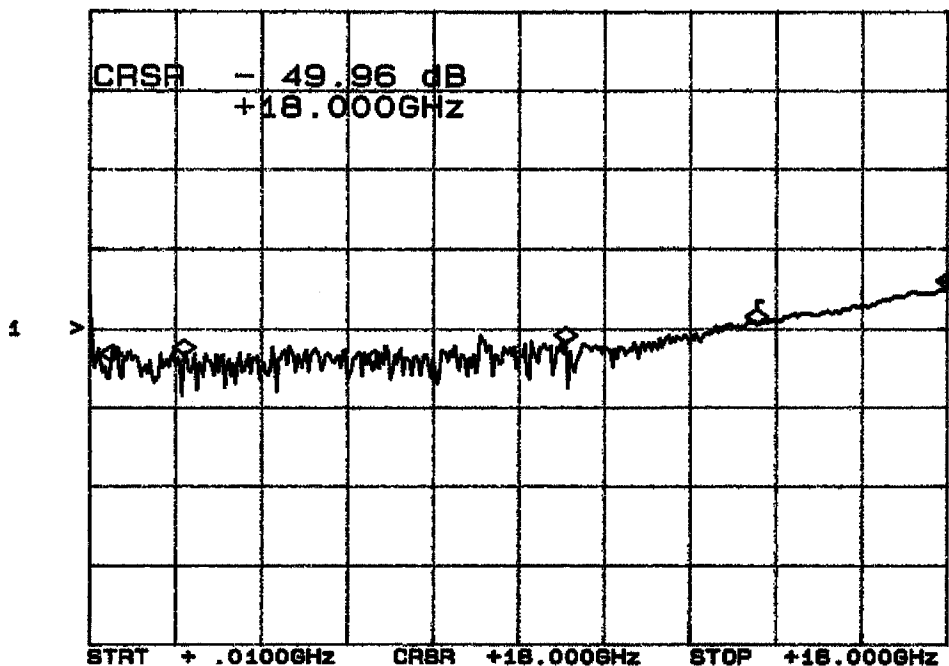

\*J8: INPUT ARM

FREQUENCY	ISOLATION
0.5 GHz	68.1 dB
2.0 GHz	66.8 dB
6.0 GHz	63.7 dB
10.0 GHz	67.7 dB
14.0 GHz	58.6 dB
18.0 GHz	49.9 dB

JUNE 23, 1999




### SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

**ISOLATION\***  
 (AS MEASURED ON A SCALAR NETWORK ANALYZER)  
 J8-J6

CH1: A -M - 51.89 dB  
 20.0 dB/ REF - 60.00 dB

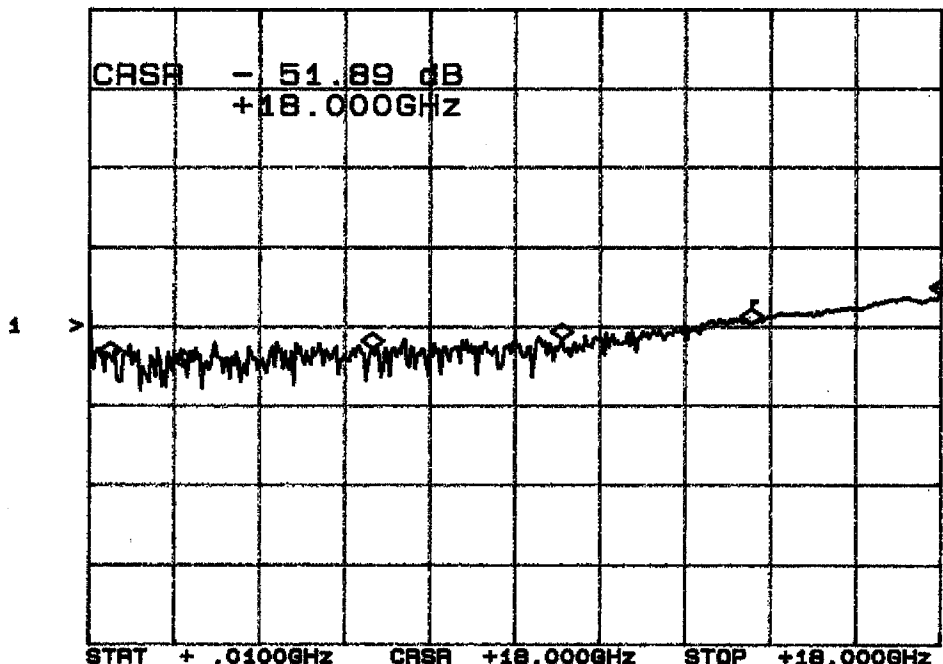

\*J8: INPUT ARM

FREQUENCY	ISOLATION
0.5 GHz	66.9 dB
2.0 GHz	71.4 dB
6.0 GHz	69.2 dB
10.0 GHz	63.2 dB
14.0 GHz	57.8 dB
18.0 GHz	51.8 dB

JUNE 23, 1999




### SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

**ISOLATION\***  
 (AS MEASURED ON A SCALAR NETWORK ANALYZER)  
 J8-J7

CH1: A -M - 48.34 dB  
 20.0 dB/ REF - 60.00 dB

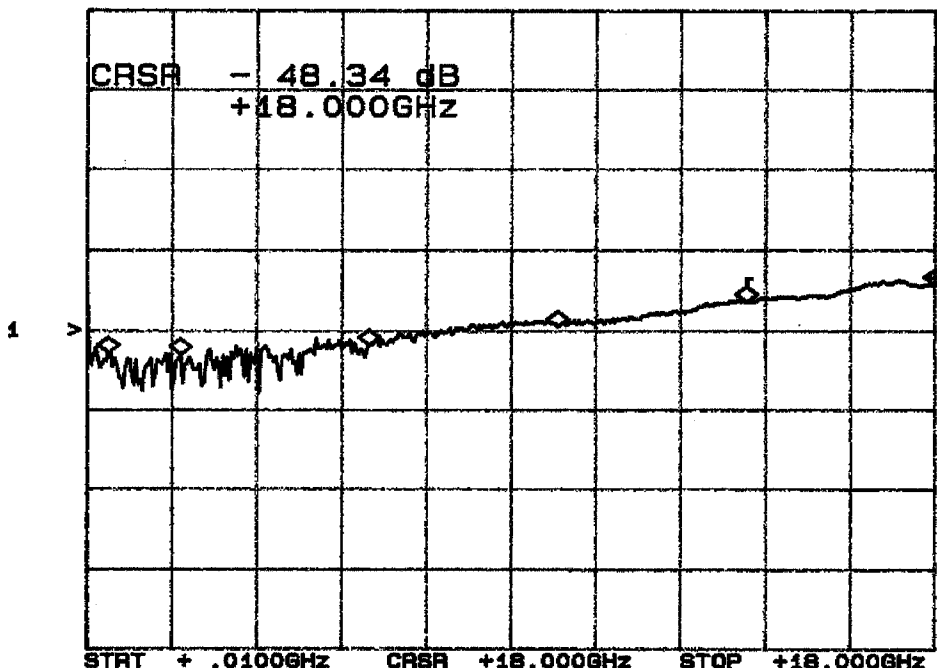

\*J8: INPUT ARM

FREQUENCY	ISOLATION
0.5 GHz	68.2 dB
2.0 GHz	68.0 dB
6.0 GHz	63.0 dB
10.0 GHz	57.7 dB
14.0 GHz	52.5 dB
18.0 GHz	48.3 dB

JUNE 23, 1999



**ISOLATION  
DATA AND PLOTS  
FROM  
100 MHz TO 2 GHz  
AS  
MEASURED  
ON A SCALAR NETWORK  
ANALYZER  
(NOISE FLOOR OF SCALAR NETWORK ANALYZER IS -70 dB)  
ON A  
SP6T  
RADIAL SOLID STATE SWITCH  
(SURFACE MOUNTABLE)  
AMC MODEL No:  
SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
(Serial Number: 6MS90495)**

**JUNE 23, 1999**



## SUMMARY TEST DATA


**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

### ISOLATION\*

(AS MEASURED ON A SCALAR NETWORK ANALYZER)

J8-J1

CH1: A -M - 70.84 dB  
 20.0 dB/ REF - 60.00 dB

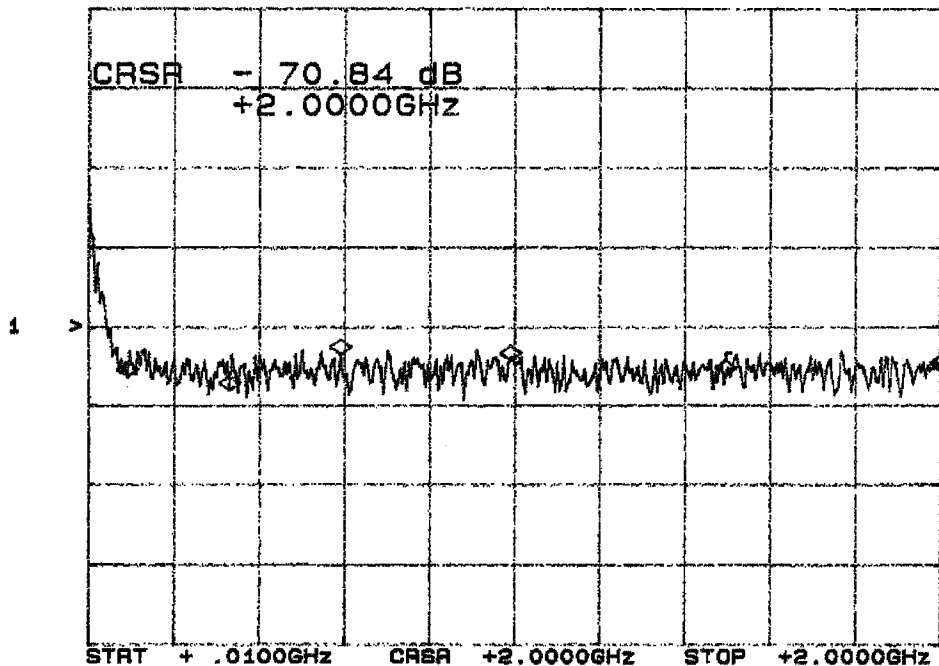

\*J8: INPUT ARM

FREQUENCY	ISOLATION
100 MHz	69.2 dB
340 MHz	68.9 dB
600 MHz	75.3 dB
1.0 GHz	71.6 dB
1.5 GHz	69.8 dB
2.0 GHz	70.8 dB

JUNE 23, 1999




### SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

**ISOLATION\***  
 (AS MEASURED ON A SCALAR NETWORK ANALYZER)  
 J8-J2

CH1: A -M - 77.03 dB  
 20.0 dB/ REF - 60.00 dB

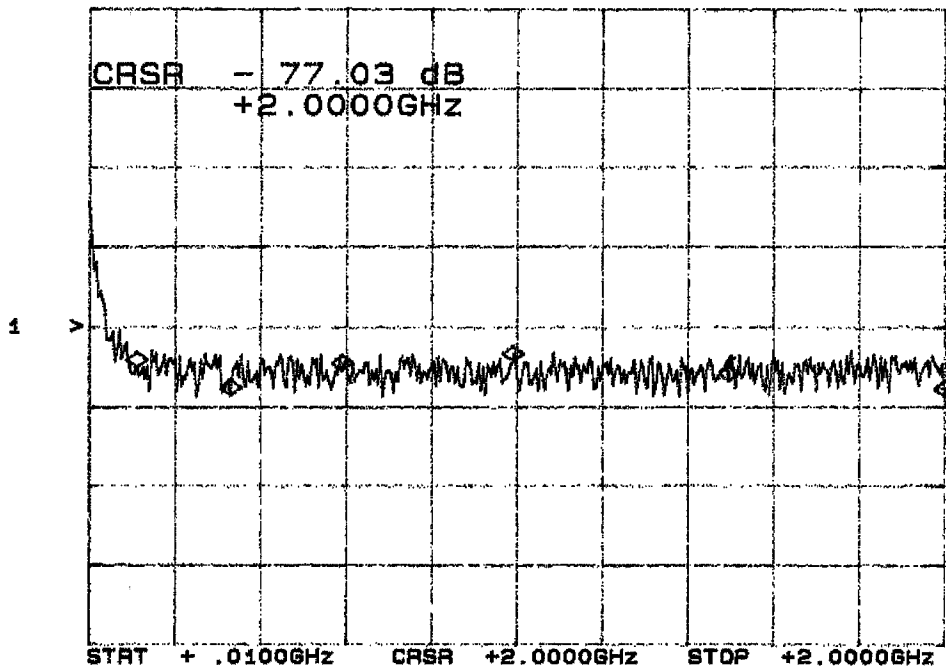

\*J8: INPUT ARM

FREQUENCY	ISOLATION
100 MHz	66.6 dB
340 MHz	72.5 dB
600 MHz	69.3 dB
1.0 GHz	76.3 dB
1.5 GHz	72.9 dB
2.0 GHz	77.0 dB

JUNE 23, 1999






### SUMMARY TEST DATA

**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

**ISOLATION\***  
 (AS MEASURED ON A SCALAR NETWORK ANALYZER)  
 J8-J3

CH1: A -M - 75.33 dB  
 20.0 dB/ REF - 60.00 dB

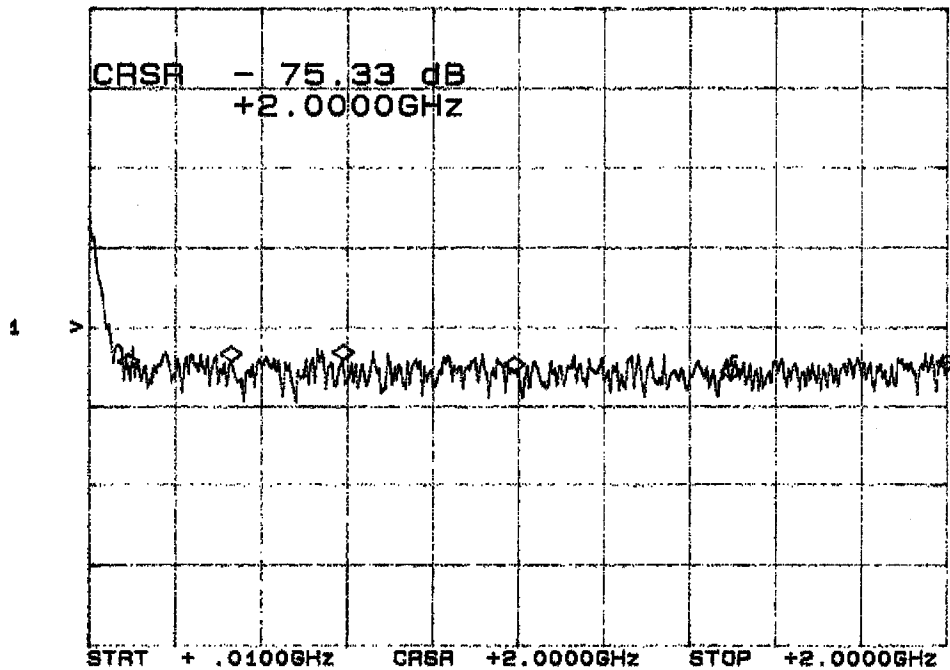

\*J8: INPUT ARM

FREQUENCY	ISOLATION
100 MHz	67.1 dB
340 MHz	70.9 dB
600 MHz	68.5 dB
1.0 GHz	69.2 dB
1.5 GHz	68.7 dB
2.0 GHz	75.3 dB

JUNE 23, 1999



## SUMMARY TEST DATA


**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

### ISOLATION\*

(AS MEASURED ON A SCALAR NETWORK ANALYZER)

J8-J5

CH1: A -M - 73.13 dB  
 20.0 dB/ REF - 60.00 dB

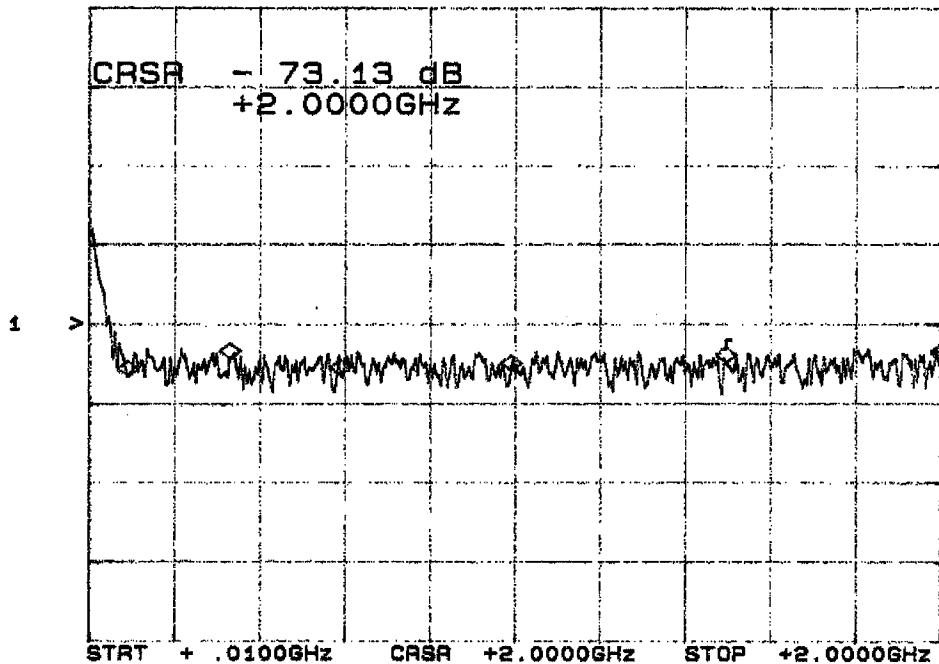

\*J8: INPUT ARM

FREQUENCY	ISOLATION
100 MHz	73.0 dB
340 MHz	68.3 dB
600 MHz	69.8 dB
1.0 GHz	71.2 dB
1.5 GHz	70.2 dB
2.0 GHz	73.1 dB

JUNE 23, 1999



## SUMMARY TEST DATA


**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

### ISOLATION\*

(AS MEASURED ON A SCALAR NETWORK ANALYZER)

J8-J6

CH1: A -M - 66.55 dB  
 20.0 dB/ REF - 60.00 dB

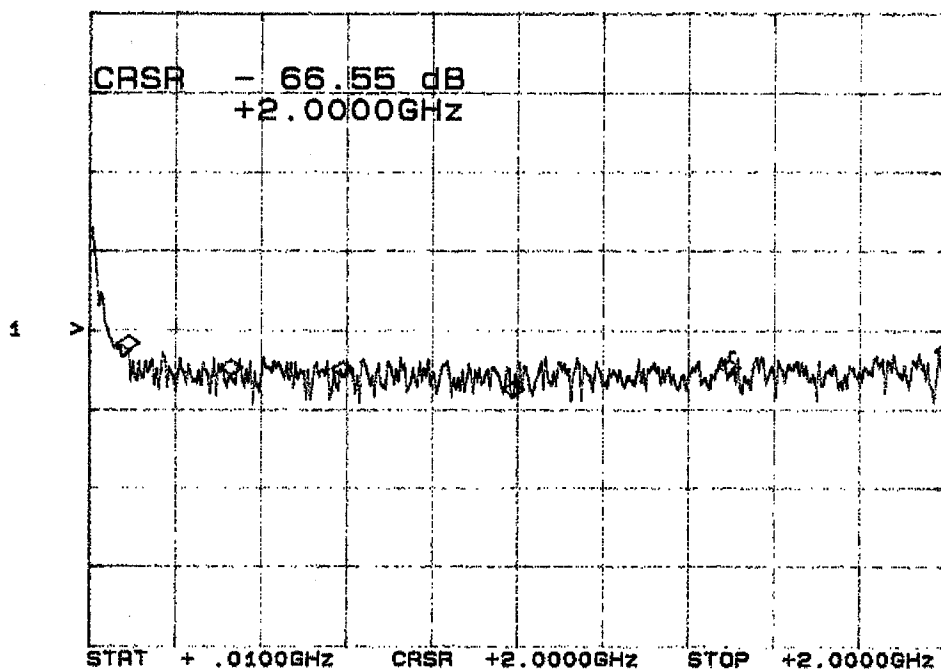

\*J8: INPUT ARM

FREQUENCY	ISOLATION
100 MHz	72.4 dB
340 MHz	68.5 dB
600 MHz	67.8 dB
1.0 GHz	72.1 dB
1.5 GHz	67.7 dB
2.0 GHz	66.5 dB

JUNE 23, 1999



## SUMMARY TEST DATA


**MODEL NUMBER** : SWN-1140-6DR-DEC-SP OPTIONS 0518, FM10  
**SERIAL NUMBER** : 6MS90495  
**ENGINEER** : RENE AFABLE  
**VOLTAGE & CURRENT DRAW** : +5vdc: +313mA; -12vdc: -44mA

### ISOLATION\*

(AS MEASURED ON A SCALAR NETWORK ANALYZER)

J8-J7

CH1: A -M - 76.28 dB  
 20.0 dB/ REF - 60.00 dB

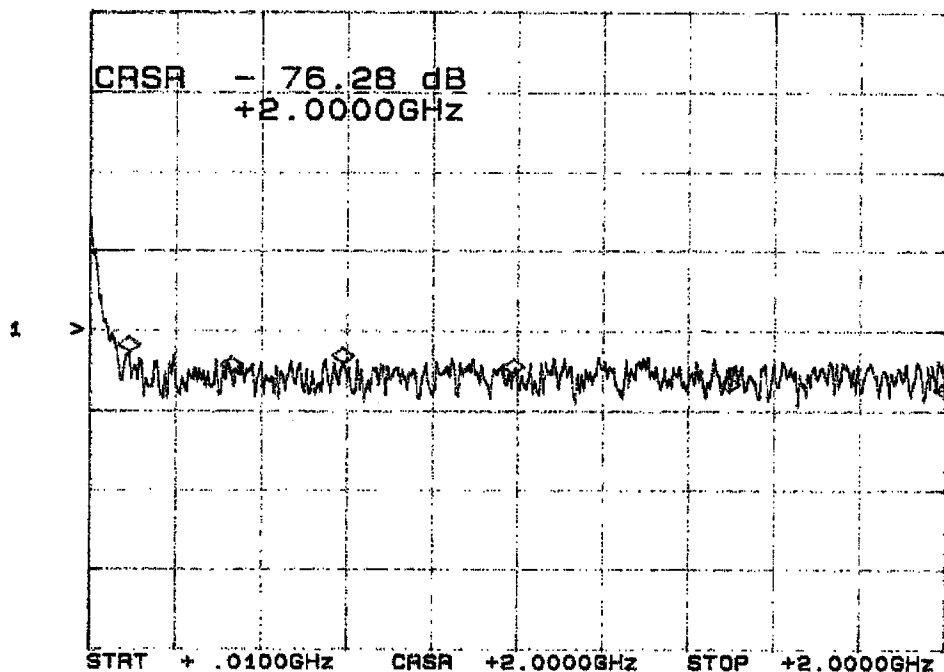

\*J8: INPUT ARM

FREQUENCY	ISOLATION
100 MHz	70.5 dB
340 MHz	72.2 dB
600 MHz	69.8 dB
1.0 GHz	66.5 dB
1.5 GHz	72.4 dB
2.0 GHz	76.2 dB

JUNE 23, 1999