


LJT SRD suitable for LJT, MIL-DTL-38999 series 1, HE308, RNJ connectors

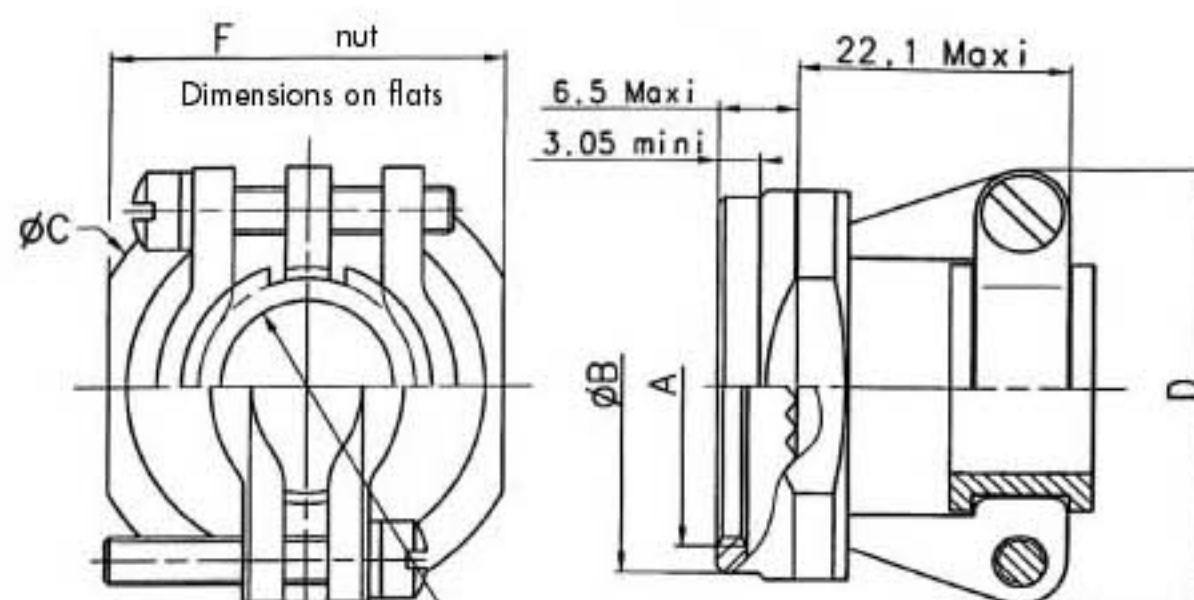

Size	A UNEF	ØB Maxi	ØC Maxi	ØD Maxi	E	F ^{+0.05} _{-0.13}	G ^{+0.2} _{-0.5}
09	.4375-28	15.2	20.8	20.8	5	16.7	3.2
11	.5625-24	18.3	23.9	24.4	5	20.7	4.8
13	.6875-24	21.3	26.9	27.2	10	22.7	8
15	.8125-20	24.6	30	30.2	9.5	25.7	9.5
17	.9375-20	27.7	32.8	33.8	12	28.7	12.7
19	1.0625-18	31	35.8	35.8	17	31.7	15.9
21	1.1875-18	34	39.9	39.4	15.5	35.7	15.9
23	1.3125-18	37.3	42.2	42.2	16	38.7	19
25	1.4375-18	39.6	45.2	45.7	21	41.7	20.3

E: Interior diameter of the strain relief sleeve

F: Interior dimensions of the clamp

Dimensions in mm

Series	LJT	SRD	11	014
Type of backshell				
SRD: straight cable clamp backshell				
Size of backshell	9-11-13-15-17-19-21-23-25			
Finish				
014: olive-drab cadmium plating				
023: electroless nickel plating				

Do not hesitate to contact us for further information

Amphenol

Amphenol Socapex
Mil/Aero & Industrial Business Unit

948, Promenade de l'Arve - BP 29

F - 74311 Thyez Cedex

Tel.: +33 (0) 4 50 89 28 00 - Fax: +33 (0) 4 50 96 19 41

<http://www.amphenol.com>

Sales office in Paris

Tel.: +33 (0) 1 49 05 30 00 - Fax: +33 (0) 1 49 05 30 43