

AMPROBE® THWD-2

Humidity Temperature Meter



- ▶ Dual LCD display with Bargraph indication
- ▶ Dew Point Reading
- ▶ Wet bulb Reading
- ▶ MAX/MIN with Time Stamp
- ▶ Data Hold function
- ▶ °F / °C unit select
- ▶ DATA memory and read function (99 readings from LCD display)
- ▶ Auto Power Off


| SPECIFICATIONS | |
|-----------------------------|--|
| Measuring Range | Temperature : -20° ~ 60° C (-4° ~ 140° F) Humidity : 1%RH ~ 99%RH |
| Resolution | 0.1°C/0.1°F/0.1%RH |
| Accuracy | Temperature : ±0.8°C, ±1.5°F Humidity: ±3%RH |
| Data Memory Capacity | Manual recording : 99 data sets. (Direct reading from LCD display.) |
| Sampling Rate | 2 times/sec |
| Operating Conditions | 0°C ~ 60°C (32°F ~ 140°F) & 10 ~ 80% R.H. |
| Power Source | 9V Battery |
| Battery Life | Approx. 200 hours. |
| Size & Weight | 225mm(L) x 50mm(W) x 38mm(H) & Approx. 200g |
| Standard Accessories | Instruction Manual, Battery, Carrying case. |



Miramar, FL
www.AMPROBE.com
 Phone: 954-499-5400
 Fax: 954-499-5454

AMPROBE® TH-2A Humidity Temperature Meter

CE

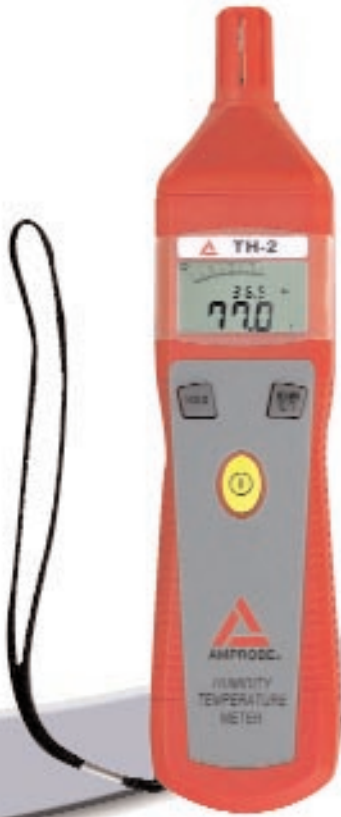

- ▶ Temperature and Humidity Readings
- ▶ Dual LCD display
- ▶ MAX/MIN with Time Stamp
- ▶ Data Hold function
- ▶ °F/°C unit select
- ▶ Auto Power Off

| SPECIFICATIONS | |
|-----------------------------|--|
| Measuring Range | Temperature : -20°C ~ 60°C (-4°F ~ 140°F) Humidity : 1%RH ~ 99%RH |
| Resolution | 0.1°C/0.1°F/0.1%RH |
| Accuracy | Temperature : ±0.8°C, ±1.5°F Humidity : ±3%RH |
| Sampling Rate | 2 times/sec |
| Operating Conditions | 0°C ~ 60°C (32°F ~ 140°F) & 10 ~ 80% R.H. |
| Power Source | 9V Battery |
| Battery Life | Approx. 200 hours. |
| Size & Weight | 225mm(L) x 50mm(W) x 38mm(H) & Approx. 200g |
| Standard Accessories | Instruction Manual, Battery, Carrying case. |



Miramar, FL
www.AMPROBE.com
 Phone: 954-499-5400
 Fax: 954-499-5454