T ²M SERIES Microphones



Conneaut Technologies, Inc.

T²M-914 Speaker/ Microphone

DESCRIPTION

Model T2M-914 is a speaker/microphone designed to match virtually any transmitter; for portables.

SPECIFICATIONS:

Type:

Electref Cartridge.

Switch:

Micro switch with positive snap action.

Coil Cord:

6 wire neoprene coil cord that extends to 5 1/2 Ft.

Impedance:

Low impedance

Power Required:

Power requirements, 3 to 12 volts D.C.

Mounting:

Rotatable spring clip on back.

Speaker:

Tailored response voice range speaker.

Housing:

Lightweight Durable Noryl® Housings.

Noryl® is a registered trade name of General Electric.

Hook-up as follows; White - Audio Hi

Red - PTT Shield - Ground

Blue - Speaker Hi


Yellow & Black not used




Model T²M-914 (Approx. 3" H. x 2" W. x 1.3" D.)

SPECIFICATIONS

MODEL T²M-914

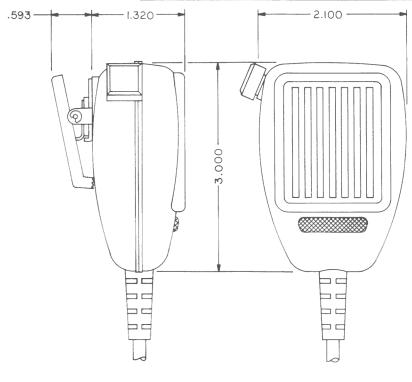



WARRANTY (LIMITED)

ASTATIC DTMF Microphones are warranted by Conneaut Technologies, Inc. for one year from date of purchase. In the event of a defect in material or workmanship, the product will be repaired or replaced at our option with a new unit of equal or superior value. This will be at no charge if carefully packed and delivered prepaid to Conneaut Technologies, Inc. The unit will be returned promptly prepaid. Warranty excludes exterior finish, appearance items, or malfunction due to abuse or operation under other than specified conditions. Consequential or incidental damages are excluded.

Conneaut Technologies, Inc. also maintains complete facilities for non-warranty service of ASTATIC products. For repair information please write:

Service Department ASTATIC/CTI P.O. Box 120 Harbor & Jackson Streets Conneaut, Ohio 44030-0120

Through the continued efforts of our engineering staff, we are constantly making improvements and changes to these specifications. We reserve the right to do so without prior notice or obligation.



Conneaut Technologies, Inc. Harbor and Jackson Streets Post Office Box 120 Conneaut, Ohio 44030 Telephone (216) 593-1111 FAX (216) 593-5395