
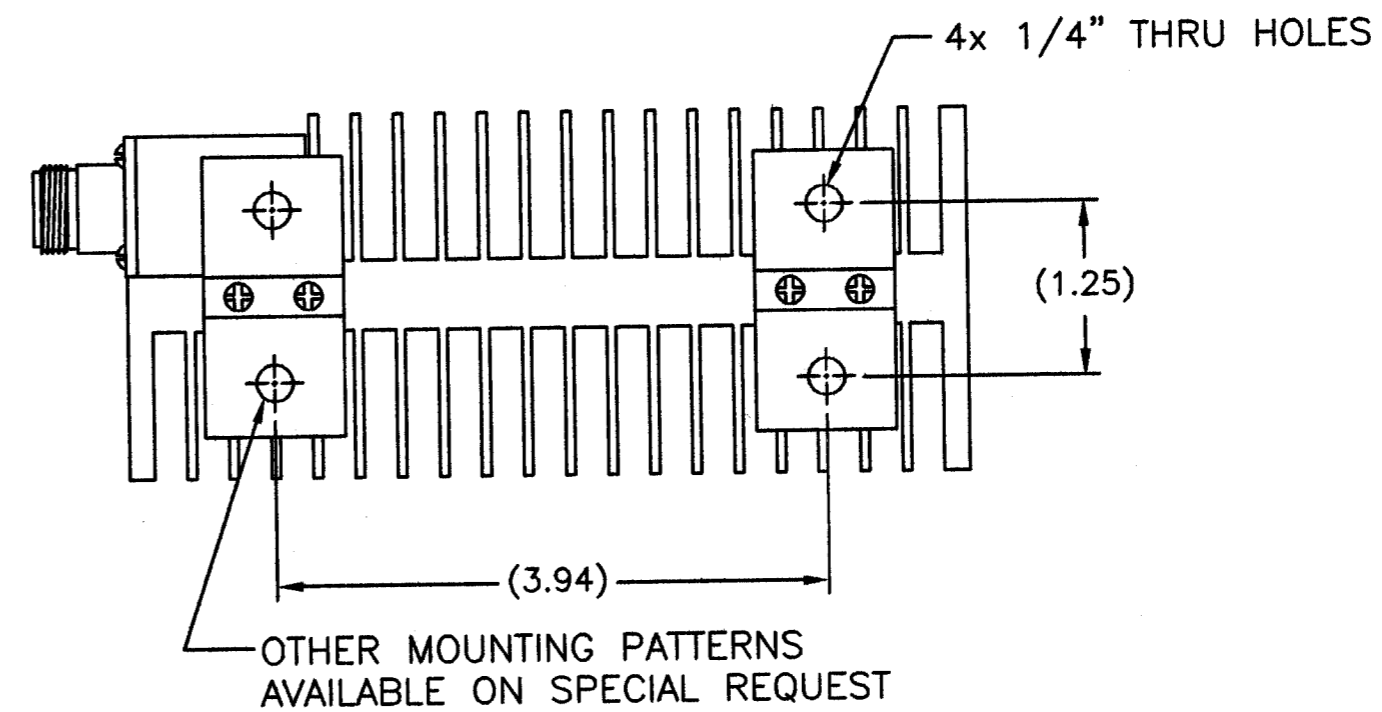
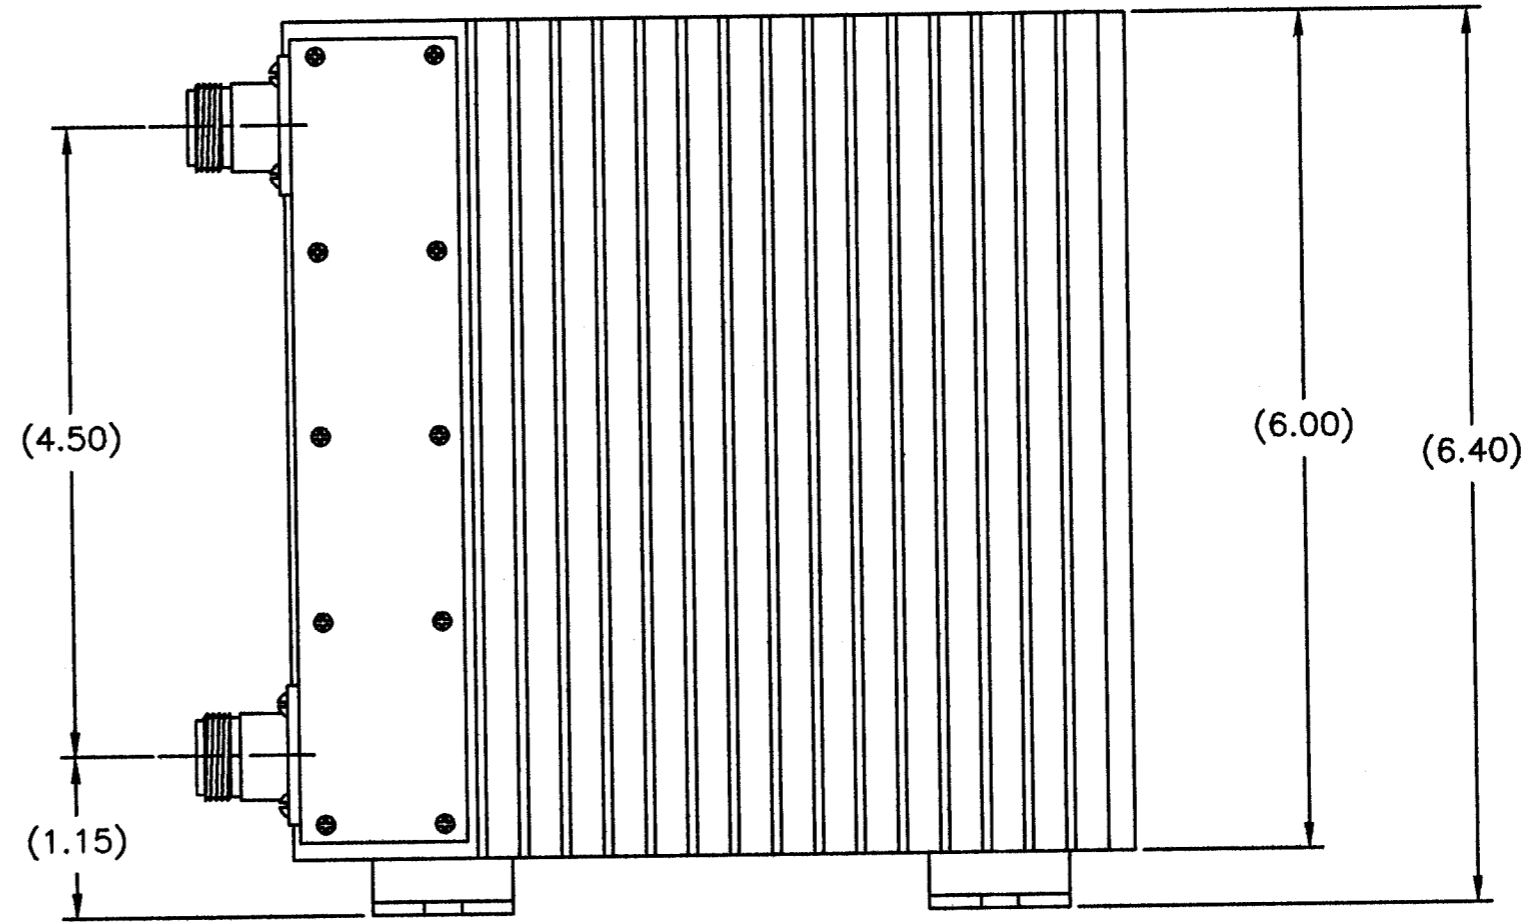
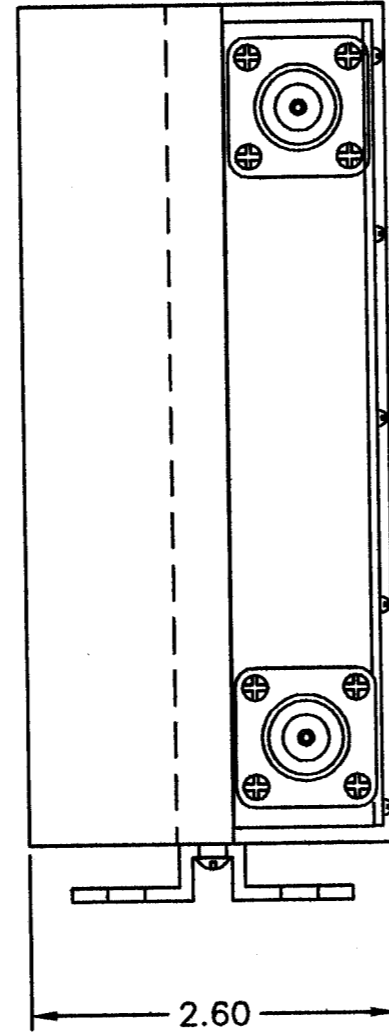


SPECIFICATIONS:

IMPEDANCE: 75 OHMS NOMINAL
 FREQUENCY RANGE: DC TO 1 GHz
 VSWR: 1.25:1 DC TO 1 GHz MAX.
 ATTENUATION ACCURACY: ± 0.75 dB
 POWER RATING: 100 WATTS MAX. @ 40°C.
 125 WATTS MAX. @ 25°C.
 COOLING FIN: ALUMINUM, BLACK ANODIZED
 HEAT SPREADER: ALUMINUM, SILVER PLATED
 CONNECTOR: 75 OHM N-TYPE FEMALES, SILVER PLATED

REVISIONS		DWG. NO.	SHEET	REV
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A	CONVERT TO BEC FORMAT	DMR 2-20-03	<i>MRW</i>

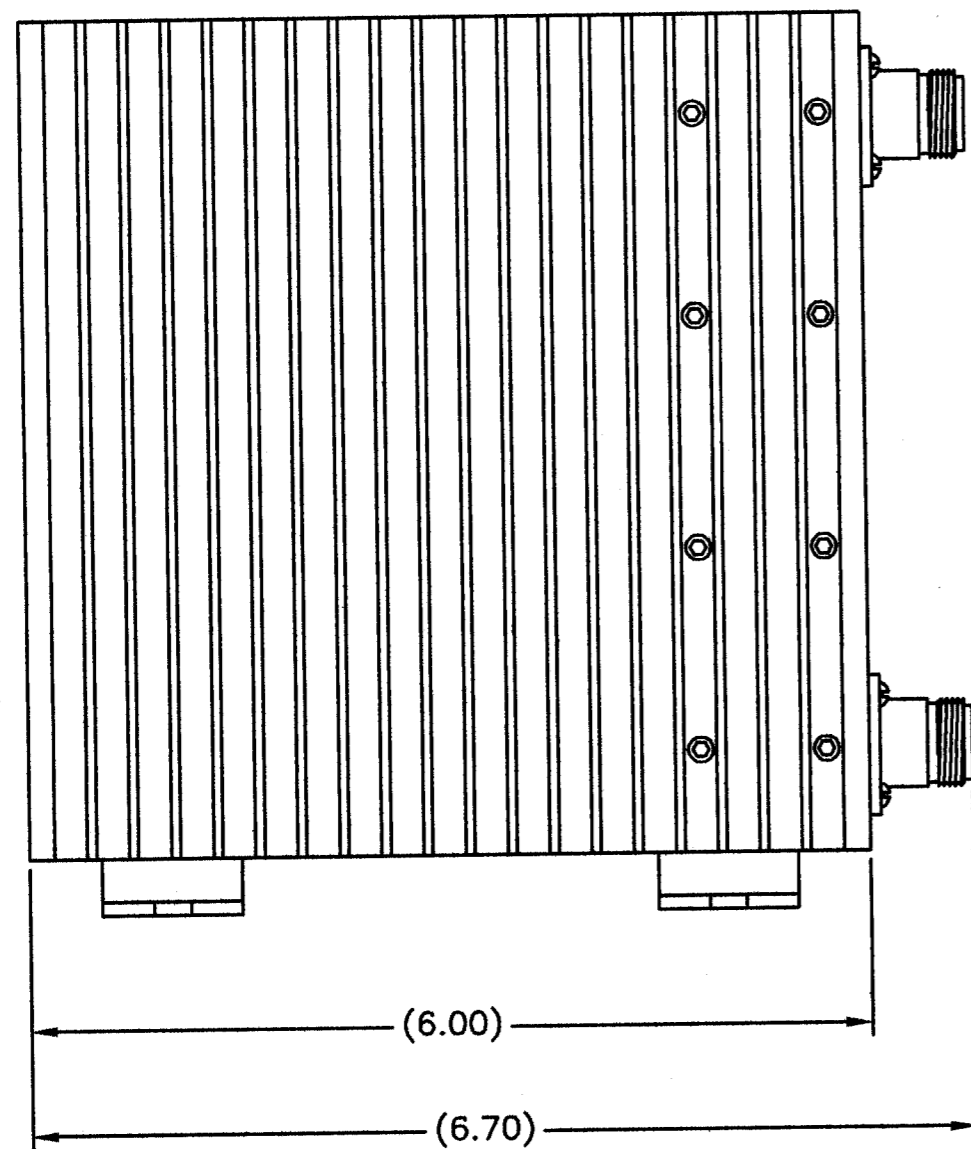

OTHER MOUNTING PATTERNS AVAILABLE ON SPECIAL REQUEST

XX = dB VALUE

DIMENSIONS HEREON ARE FOR CUSTOMER CONVENIENCE AND REFERENCE ONLY. TOLERANCE TO BE APPLIED ONLY WHERE INDIVIDUALLY STATED ON THE RESPECTIVE DIMENSION. -DO NOT SCALE DRAWING-

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		MILLIMETERS X = ±.4 XX = ±.12		THIS DRAWING IS THE PROPERTY OF THE BIRD ELECTRONIC CORPORATION. THE DESIGNS AND SPECIFICATIONS DISCLOSED HEREON ARE PROPRIETARY AND SHALL NOT BE REPRODUCED, NOR COPIED, NOR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.		BIRD Electronic Corporation Cleveland (Solon) Ohio USA	
DO NOT SCALE DRAWING		APPROVALS		DATE		TITLE	
MATERIAL		DRAWN		DATE		ATTENUATOR, CONVECTION COOLED 75 OHM, 100W	
FINISH		CHECKED		DATE		REV	
		APPROVED		DATE		REV	
		<i>MRW</i>		6-23-03		A	
		AUTOCAD		SCALE		SHEET	
		1:1		AT1		1 OF 1	