

4


3

2

1

SPECIFICATIONS:  
 FREQUENCY RANGE: 470 TO 860 MHz  
 INPUT POWER: 1000W AVG., 4000W PEAK (PEAK SIGNALS CONSIST OF RANDOMLY OCCURRING PULSES OF 100ns IN DURATION)  
 ATTENUATION: 40dB ±0.5dB  
 IMPEDANCE: 50 OHMS NOMINAL  
 VSWR: 1.20:1 MAX. OVER THE FREQUENCY RANGE  
 COOLING: ATTENUATOR MUST BE MOUNTED TO A HEAT SINK CAPABLE OF MAINTAINING A 100°C. CASE TEMPERATURE AT 1000W AVG. INPUT  
 CONNECTORS: INPUT: N-TYPE FEMALE  
 OUTPUT: SMA FEMALE  
 LABELING: LABELED WITH NOMINAL ATTENUATION (40dB)  
 MATERIALS: ALUMINUM BASE AND COVER  
 FINISH: SILVER PLATED BASE, IRRIDATED COVER

REVISIONS		DWG. NO.	SHEET	REV
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A	CONVERT TO BEC FORMAT	DMR 2-3-03	<i>MRW</i>

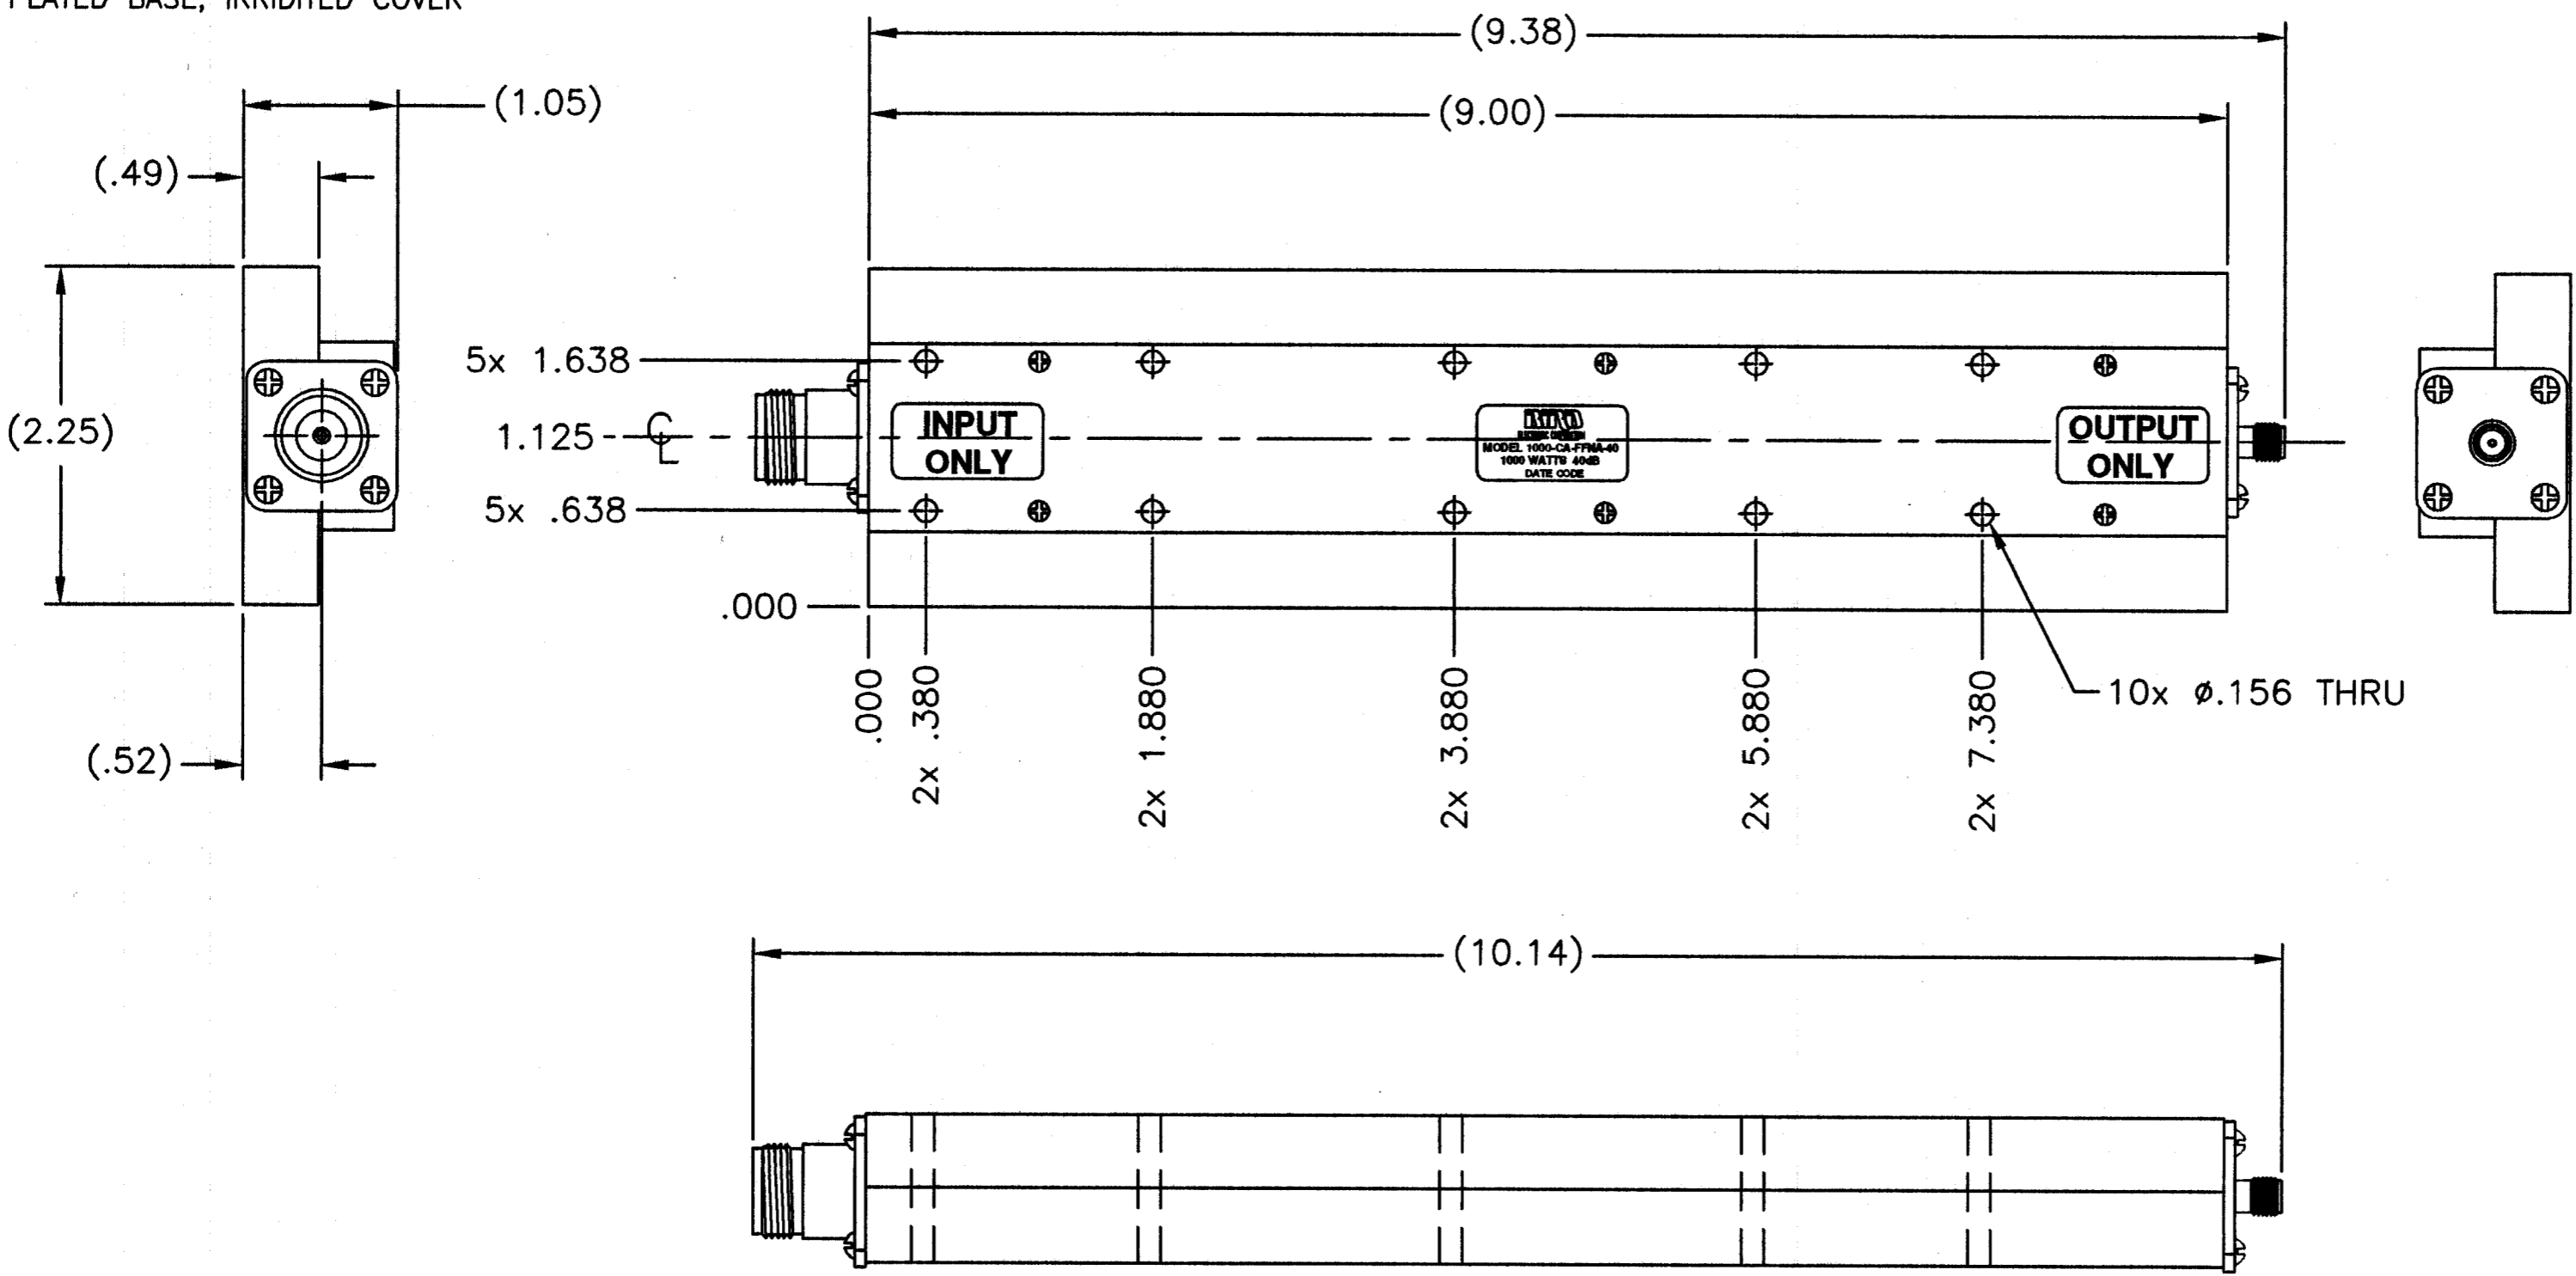

DIMENSIONS HEREON ARE FOR CUSTOMER CONVENIENCE AND REFERENCE ONLY. TOLERANCE TO BE APPLIED ONLY WHERE INDIVIDUALLY STATED ON THE RESPECTIVE DIMENSION. -DO NOT SCALE DRAWING-

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± 1/64 ± .010 ± 30'	MILLIMETERS X= ±.4 XX= ±.12	THIS DRAWING IS THE PROPERTY OF THE BIRD ELECTRONIC CORPORATION. THE DESIGNS AND SPECIFICATIONS DISCLOSED HEREON ARE PROPRIETARY AND SHALL NOT BE REPRODUCED, NOR COPIED, NOR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.	
DO NOT SCALE DRAWING		APPROVALS	DATE
MATERIAL	DRAWN D.M.RINK	2-3-03	TITLE ATTENUATOR, CONDUCTION COOLED 40dB, 1000W
FINISH	CHECKED	APPROVED <i>MRW</i>	DATE 6-15-03
	SCALE 1:1	SIZE C	FSCM NO. 70998
	COMM CODE AT1	DWG. NO. 1000-CA-FFNA-40	REV A
	SHEET 1 OF 1		

4

3

2

1