

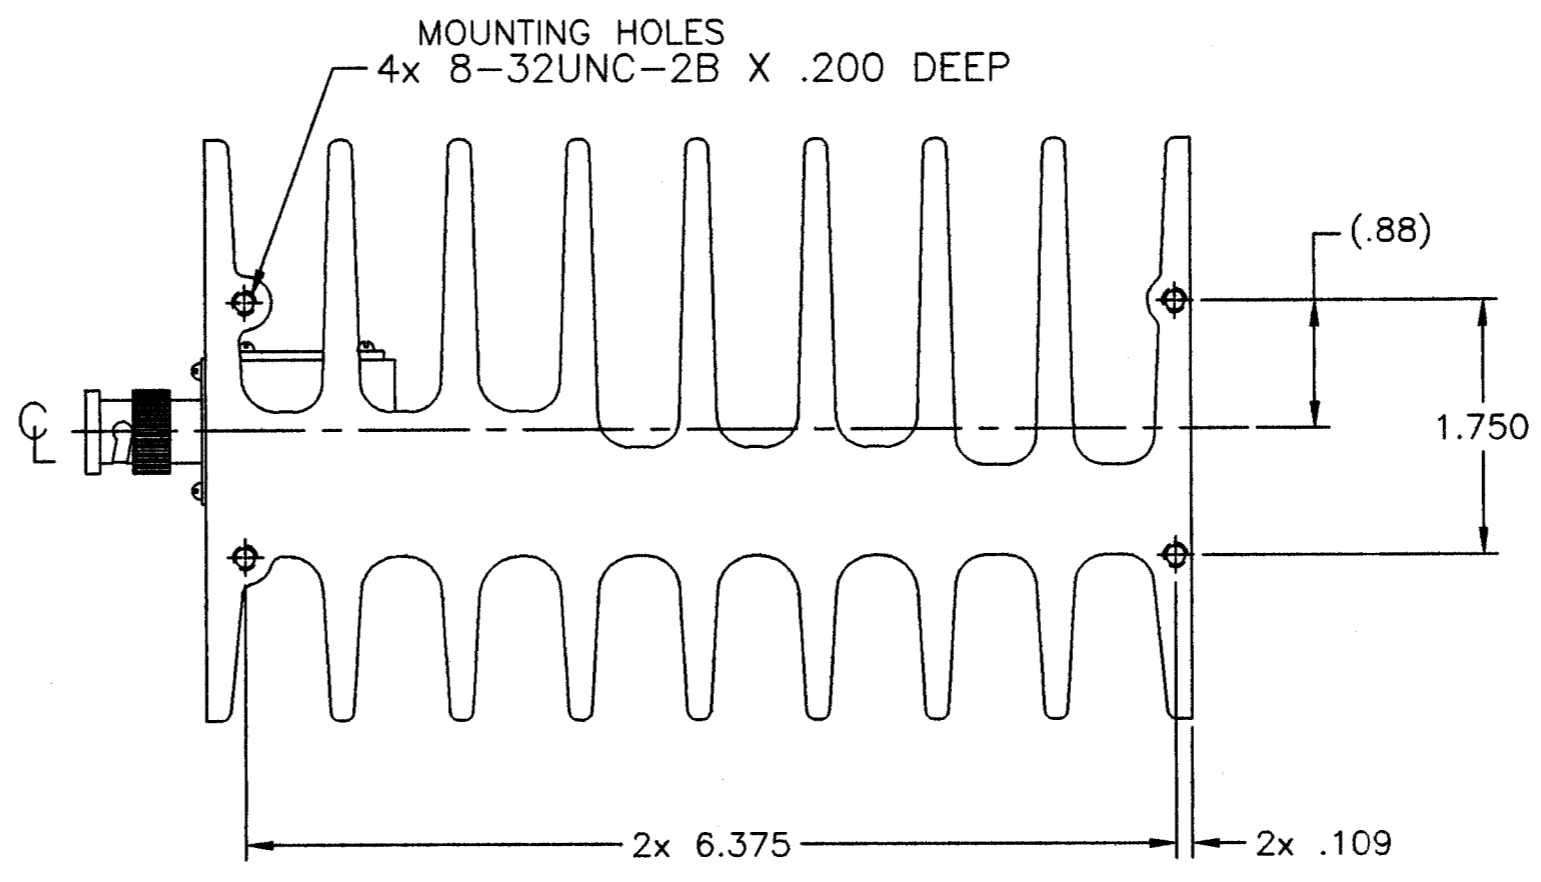
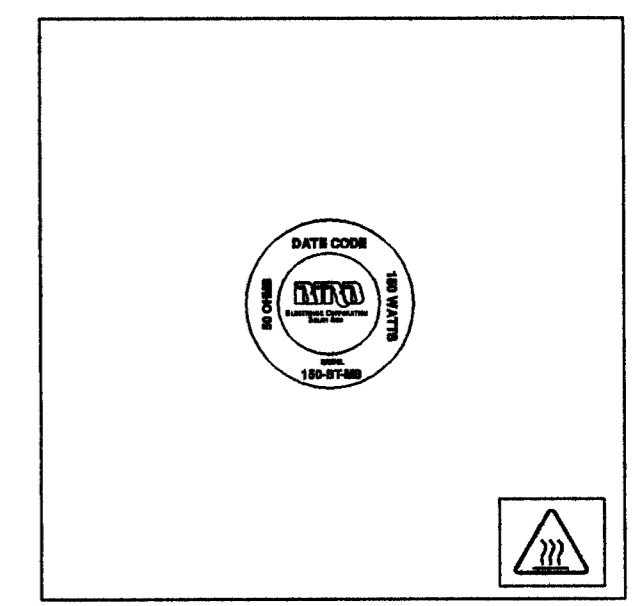


SPECIFICATIONS:  
 IMPEDANCE: 50 OHMS NOMINAL  
 FREQUENCY RANGE: DC TO 2.4GHz  
 VSWR: DC TO 1GHz AT 1.10:1 MAX.  
 1GHz TO 2.4GHz AT 1.25:1 MAX.  
 POWER RATING: 150 WATTS MAX. @ 40°C.  
 180 WATTS MAX. @ 25°C.  
 COOLING FIN: ALUMINUM, BLACK ANODIZED  
 HEAT SPREADER: ALUMINUM, TRI-ALLOY PLATED  
 CONNECTOR: BNC MALE  
 OPERATING POSITION: VERTICALLY  
 NOMINAL SIZE: APPROX. 7.57" L X 4" SQ.  
 WEIGHT: APPROX. 5 LBS.

REVISIONS		DWG. NO.	150-ST-MB	SHEET	REV
ZONE	REV	DESCRIPTION	DATE	1	A
	A	RELEASED TO PRODUCTION/DMD	DMR 8-30-04		<i>MBV</i>

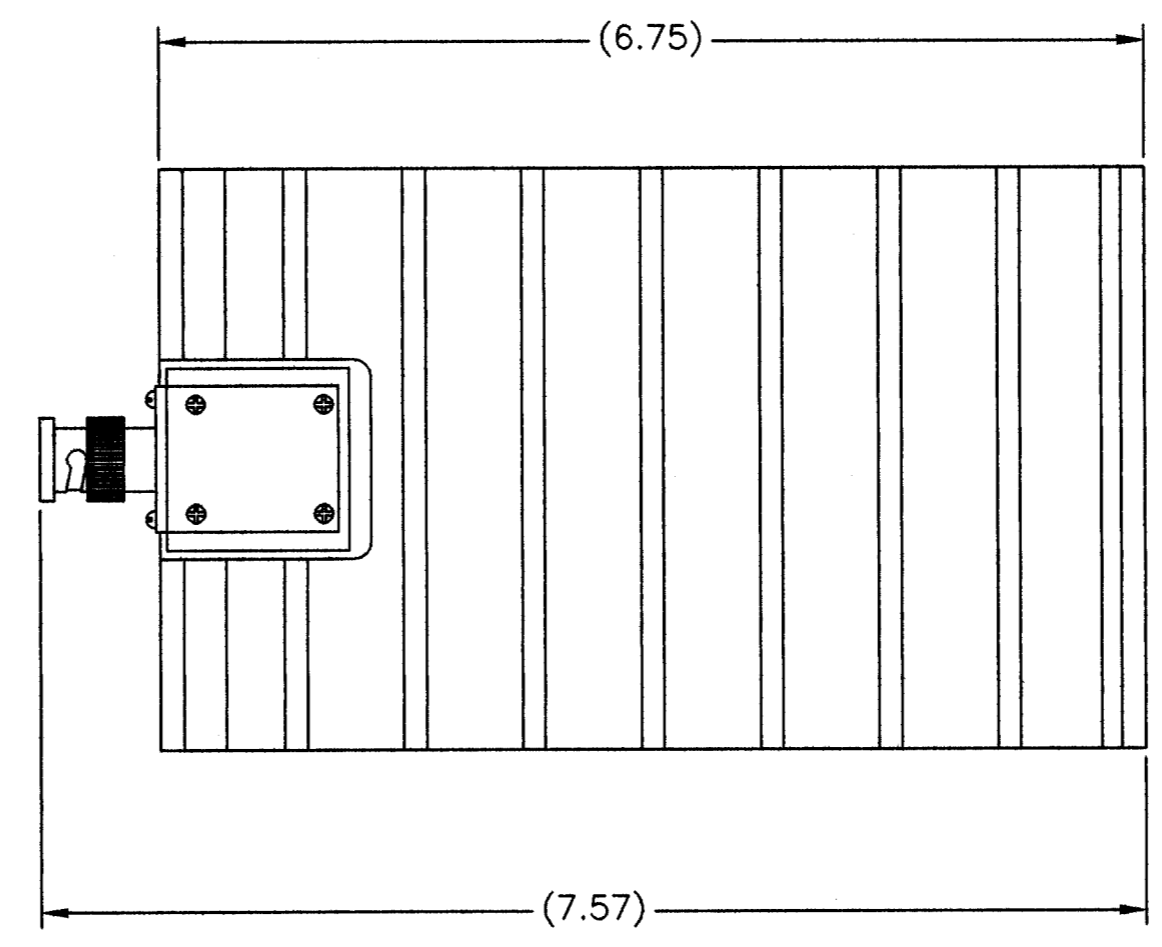

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		MILLIMETERS .X = ±.4 .XX = ±.12		THIS DRAWING IS THE PROPERTY OF THE BIRD ELECTRONIC CORPORATION. THE DESIGNS AND SPECIFICATIONS DISCLOSED HEREON ARE PROPRIETARY AND SHALL NOT BE REPRODUCED, NOR COPIED, NOR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.			
FRACTIONS	DECIMALS	ANGLES		TITLE			
± 1/64	.XX ± .010 .XXX ± .005	± 30°		TERMINATION BNC MALE, 150W			
DO NOT SCALE DRAWING				APPROVALS	DATE	DRAWN	
				<i>MBV</i>	8-31-04	D.M.RINK	
				CHECKED		SIZE	FSCM NO.
				APPROVED		C	70998
						DWG. NO.	150-ST-MB
						SCALE	1:1
						COMM CODE	LD1
						SHEET	1 OF 1

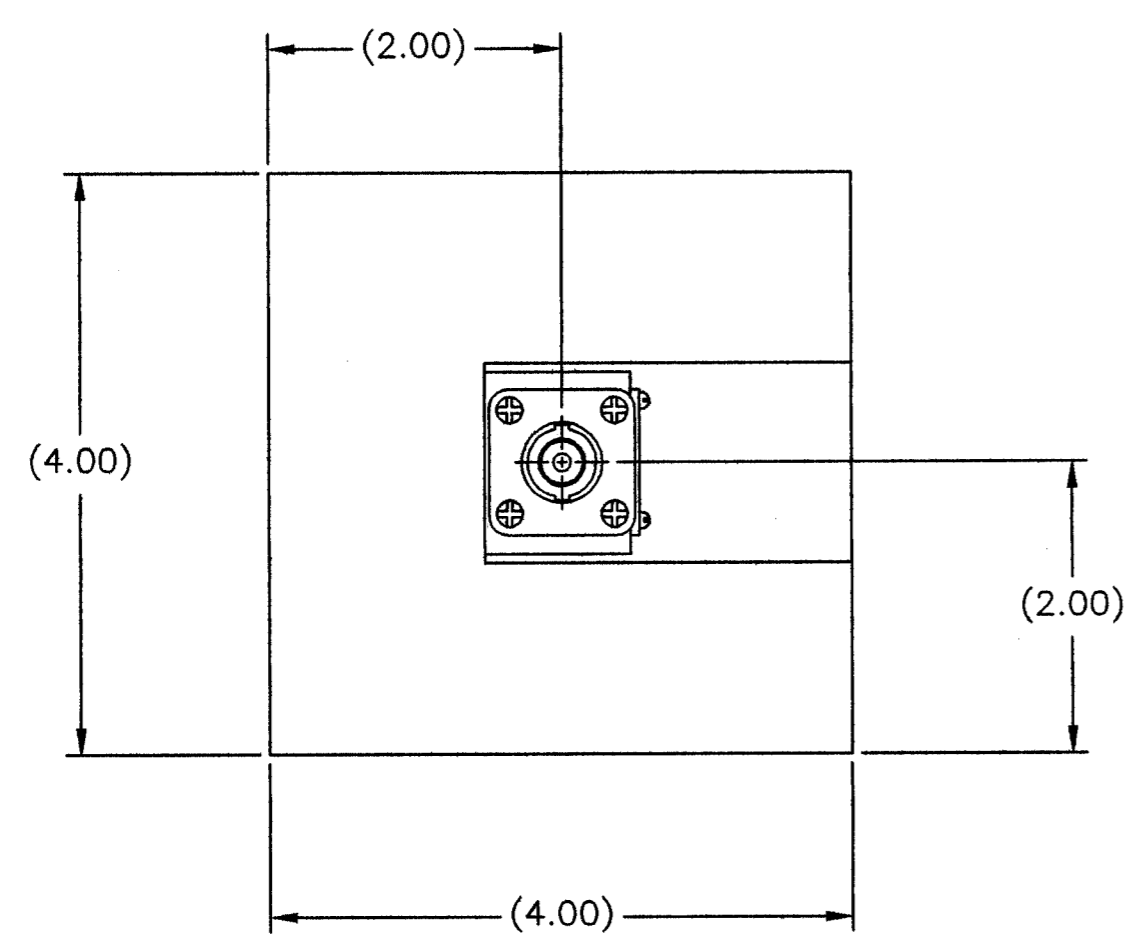