

SPECIFICATIONS:

POWER RATING: 5 WATTS CONTINUOUS
BI-DIRECTIONAL

FREQUENCY RANGE: DC TO 4GHz

ATTENUATION VALUE: 40dB

VSWR AND ATTENUATION ACCURACY:

DC TO 1 GHz AT 1.10:1 MAX., ±1.0dB

1 GHz TO 4 GHz AT 1.25:1 MAX., ±2.0dB



AMBIENT TEMPERATURE: -40°C TO +45°C

CONNECTOR: BNC MALE AND FEMALE

- TRI-ALLOY PLATED

OPERATING POSITION: ANY

REVISIONS		DWG. NO.	5-A-MFB-40	SHEET	REV
ZONE	REV	DESCRIPTION	DATE	1	A
	A	CONVERT TO BEC FORMAT	DMR 12-15-01		<i>MRV</i>

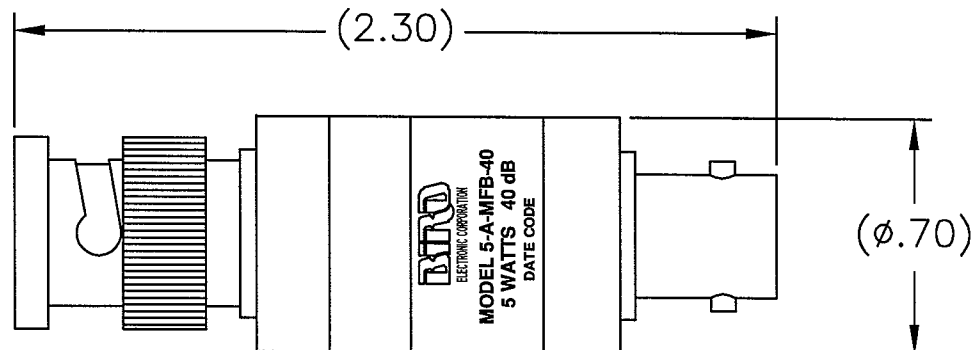

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

FRACTIONS DECIMALS ANGLES
± 1/64 .XX = ±.010 ± 30'
.XXX = ±.005

DO NOT SCALE DRAWING

MILLIMETERS
.X = ±.4
.XX = ±.12

THIS DRAWING IS THE PROPERTY OF THE BIRD ELECTRONIC CORPORATION. THE DESIGNS AND SPECIFICATIONS DISCLOSED HEREON ARE PROPRIETARY AND SHALL NOT BE REPRODUCED, NOR COPIED, NOR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.



BIRD Electronic Corporation
Cleveland (Solon) Ohio USA

MATERIAL	APPROVALS	DATE	TITLE		
	DRAWN D.M.RINK	6-19-03	ATTENUATOR, CONVECTION COOLED BNC MALE/FEMALE, 40dB, 5W		
FINISH	CHECKED		SIZE	FSCM NO.	DWG. NO.
	APPROVED <i>MARKV</i>	6-24-03	A	70998	5-A-MFB-40
		AUTOCAD	SCALE	COMM CODE	SHEET
			1:1	AT1	1 OF 1