

SPECIFICATIONS:

POWER RATING:

5 WATTS MAX. @ 40°C.

6 WATTS MAX. @ 25°C.

CONNECTOR: BNC MALE

FREQUENCY RANGE & VSWR:

DC TO 1 GHz AT 1.10:1 MAX.

1 GHz TO 4 GHz AT 1.25:1 MAX.

IMPEDANCE: 50 OHMS NOMINAL

AMBIENT TEMPERATURE: RANGE: -40°C TO +40°C

OPERATING POSITION: ANY


COOLANT: DRY (CONVECTION COOLED)

FINISH: SILVER OR TRI-ALLOY PLATED

NOMINAL SIZE: APPROX. 1.75" L X ϕ .700"

WEIGHT: APPROX. 1.5 oz. (42 g)

REVISIONS			DWG. NO.	5-T-MB	SHEET	REV
			1	A		
ZONE	REV	DESCRIPTION	DATE	APPROVED		
	A	CHNG LABEL, FINISH ECN #0049	3-27-96	<i>MMA</i>		

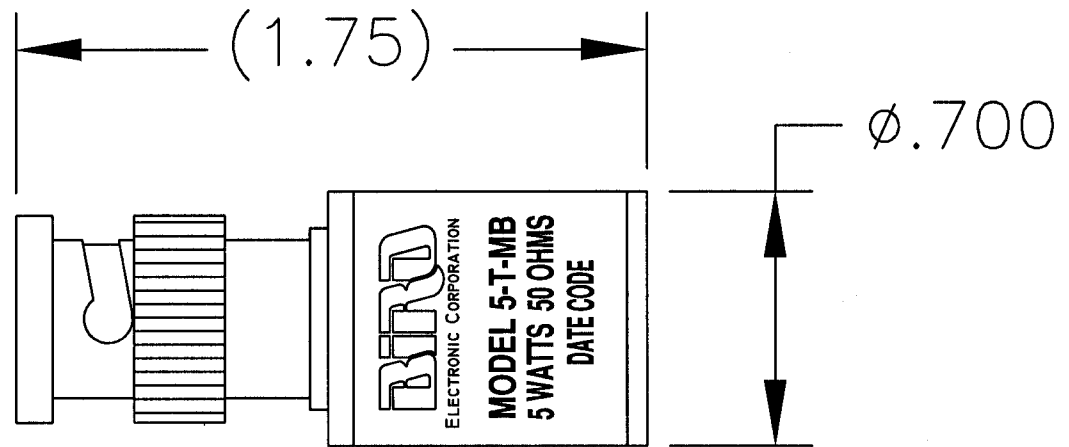

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

FRACTIONS	DECIMALS	ANGLES
$\pm 1/64$.XX = ± 0.010	$\pm 30'$
	.XXX = ± 0.005	

DO NOT SCALE DRAWING

MILLIMETERS

.X = ± 0.4
.XX = ± 0.12

THIS DRAWING IS THE PROPERTY OF THE BIRD ELECTRONIC CORPORATION. THE DESIGNS AND SPECIFICATIONS DISCLOSED HEREON ARE PROPRIETARY AND SHALL NOT BE REPRODUCED, NOR COPIED, NOR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.



BIRD Electronic Corporation
Cleveland (Solon) Ohio USA

MATERIAL	APPROVALS		DATE	TITLE		
	DRAWN	D.M.RINK	4-11-03	FINAL ASS'Y, TERMINATION BNC MALE, 5W		
	CHECKED			SIZE	FSCM NO.	DWG. NO.
	APPROVED	<i>MAR V</i>	4-14-03	A	70998	5-T-MB
FINISH	AUTOCAD		SCALE	1:1	COMM CODE	LD1
					SHEET	1 OF 1