SPECIFICATIONS:

POWER RATING: 50 W MAX. @ 40°C. 60 W MAX. @ 25°C.


FREQUENCY RANGE & VSWR: DC TO 1GHz AT 1.10:1 MAX. 1GHz TO 2.4GHz AT 1.25:1 MAX.


IMPEDANCE: 50 OHMS, NOMINAL AMBIENT TEMPERATURE RANGE: -40°C TO +40°C CONNECTORS: N-TYPE FEMALE, TRI-ALLOY PLATED OPERATING POSITION: ANY (CONVECTION COOLED)


FINISH: BLACK ANODIZED

NOMINAL SIZE: APPROX. 5.20" L X 2.30"

WEIGHT: APPROX. 1.0 LBS

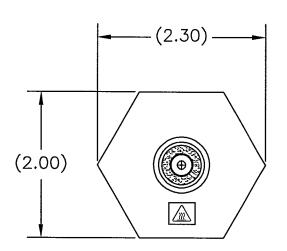

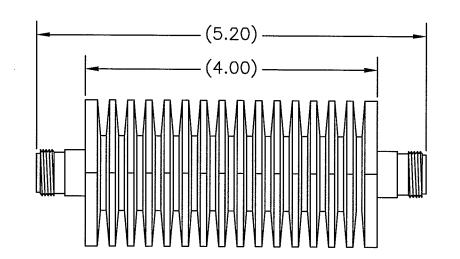



REVISIONS

DATE

4-14-98

DIMENSIONS HEREON ARE FOR CUSTOMER

APPROVED

MOU

DESCRIPTION

NOTE:

FOR VALUES NOT LISTED, REFER TO THE NEXT HIGHER ATTENUATION LEVEL FOR SPECIFICATIONS. FOR ATTENUATION VALUES GREATER THAN THE HIGHEST LISTED ATTENUATION VALUE, REFER TO THE VALUE 1/2 THE DESIRED ATTENUATION LEVEL, THEN DOUBLE THE LISTED SPECIFICATION VALUES, UNLESS OTHERWISE SPECIFIED.

XX = DASH NUMBER (dB VALUE)

-30	30	±0.8 dB	±1.3 dB
-20	20	±0.5 dB	±1.0 dB
-10	10	±0.4 dB	±0.8 dB
-06	6	±0.4 dB	±0.6 dB
-03	3	±0.3 dB	±0.5 dB
-02	2	±0.3 dB	±0.5 dB
-01	1	±0.3 dB	±0.5 dB
DASH NO.	dB ATTEN.		1 — 2.4GHz ACCURACY ±dB

CONVENIENCE AND REFERENCE ONLY. TOLERANCE TO BE APPLIED ONLY WHERE INDIVIDUALLY STATED ON THE RESPECTIVE DIMENSION. -DO NOT SCALE DRAWING-

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES $X=\pm 4$ $X=\pm 12$ FRACTIONS DECIMALS ANGLES $\pm 1/64$ $XX=\pm 0.010$ $\pm 30^\circ$	THIS DRAWING IS THE PROPERTY CORPORATION. THE DESIGNS AND HEREON ARE PROPRIETARY AND SHAL COPIED, NOR USED AS THE BASIS FOR APPARATUS OR DEVICES WITHOUT THEIR	SPECIFICATIONS L NOT BE REPRO THE MANUFACTURE	DISCLO DUCED, OR SAL	NOR E OF			ilectronic Corporation leveland (Solon) Ohio USA	
DO NOT SCALE DRAWING MATERIAL	APPROVALS	DATE	TITLE	ATTE	ECTION COOLED			
WALLIANE.	D.M.RINK	6-3-03				OR, CONVECTION COOLED FEMALE/FEMALE, 50W		
	CHECKED	. SIZI		FSCM NO.		DWG. NO. 50-A-FFN-XX A		
FINISH	APPROVED MARKY	6-23-03	B	B 70998				
		AUTOCAD	SCALE	1:1	COMM CODE	AT1	SHEET 1 OF 1	

ZONE REV

A ECN #0193