**SPECIFICATIONS:** 

POWER RATING: 50 W MAX. @ 40°C.

60 W MAX. @ 25°C.

FREQUENCY RANGE & VSWR: DC TO 1GHz AT 1.10:1 MAX. 1GHz TO 2.4GHz AT 1.25:1 MAX.

IMPEDANCE: 50 OHMS, NOMINAL

AMBIENT TEMPERATURE RANGE: -40°C TO +40°C


CONNECTORS: SMA TYPE MALE/FEMALE, STAINLESS STEEL

OPERATING POSITION: ANY (CONVECTION COOLED)


FINISH: BLACK ANODIZED


NOMINAL SIZE: APPROX. 4.73" L X 2.30"

WEIGHT: APPROX. 1.0 LBS

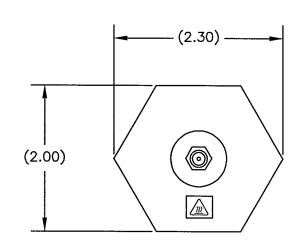

MATERIAL

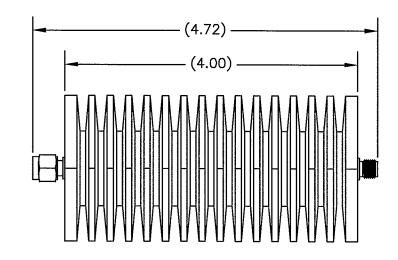



REVISIONS

DATE

4-14-98

APPROVED

mas

DESCRIPTION

ZONE REV

A ECN #0193

## NOTE:

50

FOR VALUES NOT LISTED, REFER TO THE NEXT HIGHER ATTENUATION LEVEL FOR SPECIFICATIONS. FOR ATTENUATION VALUES GREATER THAN THE HIGHEST LISTED ATTENUATION VALUE, REFER TO THE VALUE 1/2 THE DESIRED ATTENUATION LEVEL. THEN DOUBLE THE LISTED SPECIFICATION VALUES, UNLESS OTHERWISE SPECIFIED.

## XX = DASH NUMBER (dB VALUE)

-30	30	±0.8 dB	±1.3 dB
-20	20	±0.5 dB	±1.0 dB
_10	10	±0.4 dB	±0.8 dB
-06	6	±0.4 dB	±0.6 dB
-03	3	±0.3 dB	±0.5 dB
-02	2	±0.3 dB	±0.5 dB
-01	1	±0.3 dB	±0.5 dB
DASH NO.	dB ATTEN.		1 – 2.4GHz ACCURACY ±dB

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: THIS DRAWING IS THE PROPERTY OF THE BIRD ELECTRONIC CORPORATION. THE DESIGNS AND SPECIFICATIONS DISCLOSED HEREON ARE PROPRIETARY AND SHALL NOT BE REPRODUCED, NOR MILLIMETERS FRACTIONS DECIMALS ANGLES COPIED, NOR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF .XX= ±.010 ±30' ±1/64 APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT. DO NOT SCALE DRAWING

APPROVED

**APPROVALS** DATE D.M.RINK 6-3-03 CHECKED

ATTENUATOR, CONVECTION COOLED SMA TYPE MALE/FEMALE, 50W

SIZE FSCM NO. 50-A-MFA-XX 70998 Α 623-03 MARY V COMM CODE AT1 AUTOCAD 1 OF 1

DIMENSIONS HEREON ARE FOR CUSTOMER CONVENIENCE AND REFERENCE ONLY. TOLERANCE TO BE APPLIED ONLY WHERE INDIVIDUALLY STATED ON THE RESPECTIVE DIMENSION. -DO NOT SCALE DRAWING-

Cleveland (Solon) Ohio USA

Electronic Corporation