


DWG NO. 75-A-MFB-XX
 SHEET 1
 REV A

SPECIFICATIONS:
 POWER RATING: 75 WATT CONTINUOUS
 FREQUENCY RANGE & VSWR:
 DC TO 1GHz AT 1.10:1 MAX.
 1GHz TO 2.4GHz AT 1.25:1 MAX.
 AMBIENT TEMPERATURE RANGE: -40° C TO +40° C
 CONNECTORS: BNC MALE AND FEMALE, TRI-ALLOY PLATED
 OPERATING POSITION: ANY
 DRY LOAD: CONVECTION COOLED

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A	NEW DRAWING RELEASE PER DMD	8-19-04	<i>mev</i>

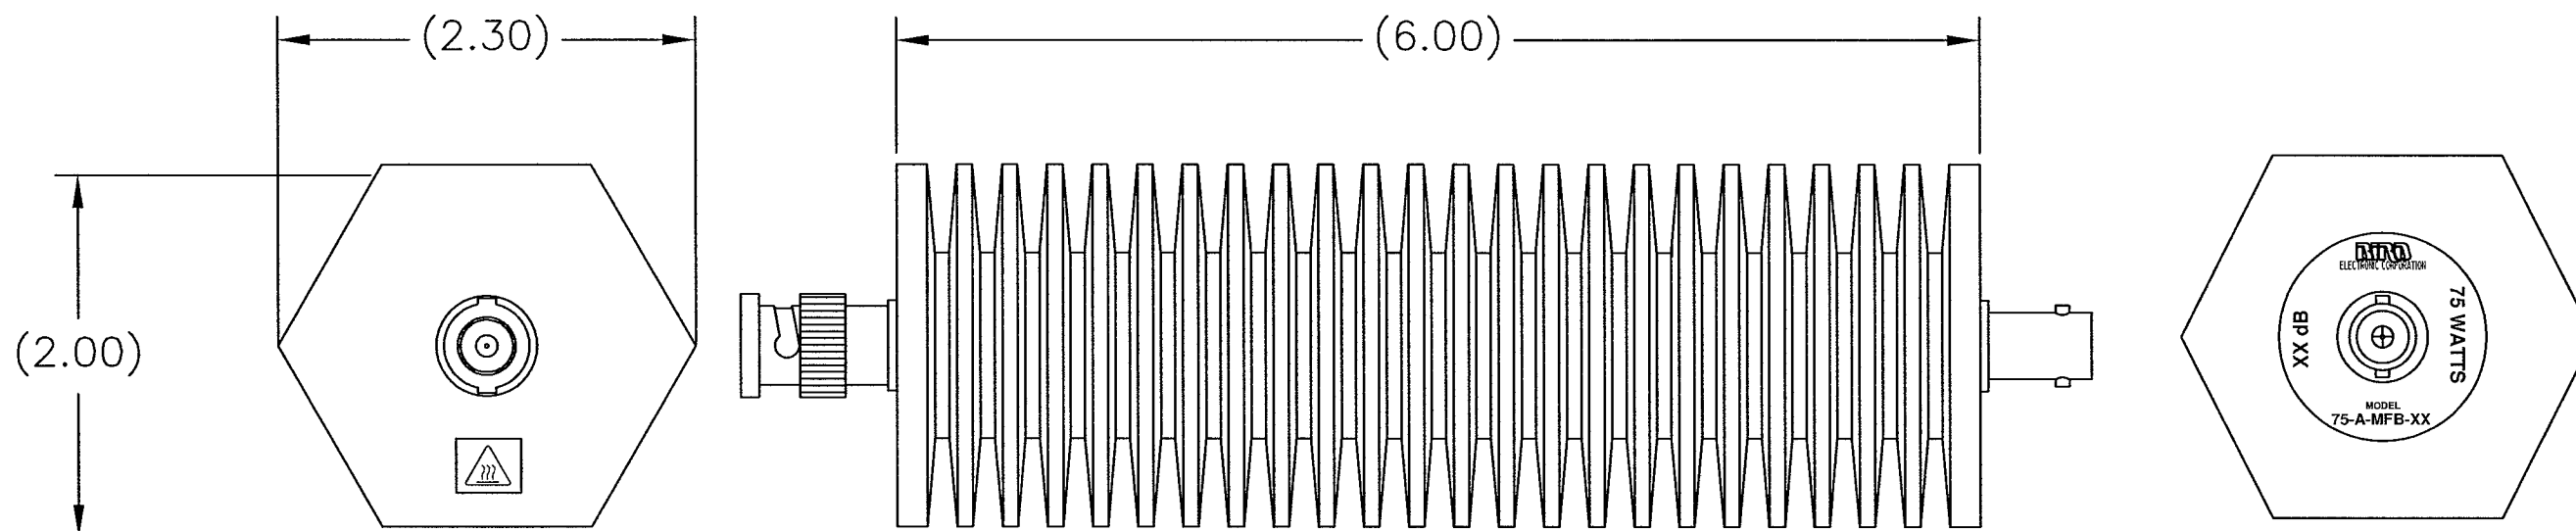

XX = DASH NUMBER (dB VALUE)

-30	30	±0.8 dB	±1.3 dB
-20	20	±0.5 dB	±1.0 dB
-10	10	±0.4 dB	±0.8 dB
-06	6	±0.4 dB	±0.6 dB
-03	3	±0.3 dB	±0.5 dB
-02	2	±0.3 dB	±0.5 dB
-01	1	±0.3 dB	±0.5 dB
DASH NO.	dB ATTEN.	DC - 1GHz ATTENUATOR	1 - 2.4GHz ACCURACY ± dB

DIMENSIONS HEREON ARE FOR CUSTOMER CONVENIENCE AND REFERENCE ONLY. TOLERANCE TO BE APPLIED ONLY WHERE INDIVIDUALLY STATED ON THE RESPECTIVE DIMENSION. -DO NOT SCALE DRAWING-

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES $\pm 1/64$.XX=±.010 ±30° .XXX=±.005	MILLIMETERS .X=±.4 .XX=±.12
DO NOT SCALE DRAWING	
MATERIAL	APPROVALS
FINISH	DATE
	DRAWN DMD CHECKED APPROVED <i>MARK V</i> DATE 8-19-04 AUTOCAD

THIS DRAWING IS THE PROPERTY OF THE BIRD ELECTRONIC CORPORATION. THE DESIGNS AND SPECIFICATIONS DISCLOSED HEREON ARE PROPRIETARY AND SHALL NOT BE REPRODUCED, NOR COPIED, NOR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.			
TITLE		ATTENUATOR, CONVECTION COOLED	
BNC MALE/FEMALE, 75W		DATE 8-18-04	
SIZE	FSCM NO.	DWG. NO.	REV
B	70998	75-A-MFB-XX	A
SCALE	1:1	COMM CODE	AT1
SHEET		1 OF 1	

