


Multi-Conductor Cables for Piezoresistive and Variable Capacitance Transducers

ENDEVCO CABLE ASSEMBLY	ENDEVCO RAW CABLE	JACKET MATERIAL & COLOR		OUTER CABLE DIAMETER in (mm) max	DIELECTRIC MATERIAL	WIRE COLOR AND CONDUCTOR SIZE	ENDEVCO TRANSDUCER MODEL #
3022B	12334	Silicone	Natural	0.12 (3.05)	Teflon® ET	4 - Red, Grn, Blk, Wht/30 AWG	2262A, 7265AM3
3023B	13075	Silicone	Natural	0.126 (3.20)	Teflon ET	6 - Red, Grn, Blk, Wht, Wht/Red Wht/Grn/30 AWG	2262CA, 7265AM3
	22299	Extruded Teflon TFE	Red	0.125 (3.18)	Teflon TFE	6 - Red, Grn, Blk, Wht, Wht/Red Wht/Grn/30 AWG	7231C
	23699	Silicone	Natural	0.14 (3.56)	Teflon	9 - Red/Yel, Wht/Yel, Blk/Yel, Red/Vio, Red/Blu, Wht/Blu, Blk/Blu, Wht/Vio, Blk/Vio/32 AWG	7267A
	24328	Silicone	Grey	0.104 (2.64) KT or PFA	Teflon ET 32 AWG	4 - Red, Grn, Blk, Wht	7264A, 7265A-HS 7290A, 8510B/C 8530B/C
	25011	Teflon FEP or PFA See dash number		0.011 (0.28) Individual Wire	Teflon FEP or PFA	Red - 1, Blk -2, Wht -3, Grn -4 36 AWG, Solid Wire	8514
	25034	Teflon FEP	Clear	0.05 (1.27)	Teflon FEP	4 - Red, Grn, Blk, Wht/36 AWG	8507C, 7270A
	25045	Teflon PF	Grey	0.093 (2.36)	Teflon PFA	4 - Red, Grn, Blk, Wht/30 AWG	8520A, 8540
	27542	Teflon TFE Tape Red -1, Blue -2, White -3		0.115 (2.92)	Teflon TFE	4 - Red, Grn, Blk, Wht/30 AWG	7231C
EW862	Teflon PTFE		Ribbon 0.018 X 0.109 (0.46 X 2.77)	Teflon PTFE	4 - Red, Grn, Blk, Wht 36 AWG Solid Wire	8515C	

Model 3022B and 3023B

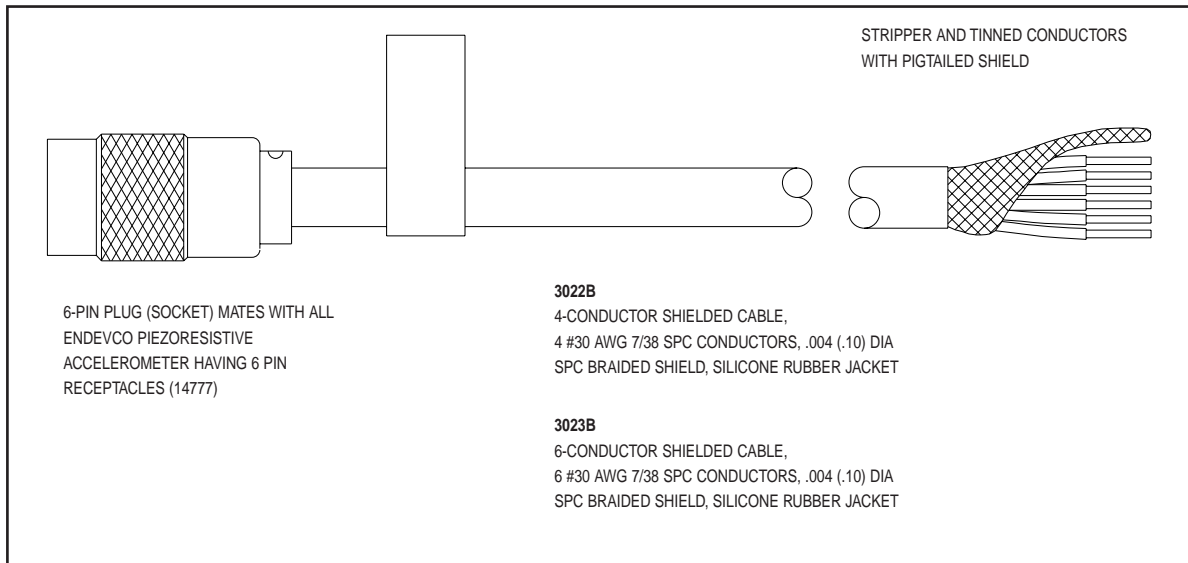

Continued product improvement necessitates that Endevco reserve the right to modify these specifications without notice. Endevco maintains a program of constant surveillance over all products to ensure a high level of reliability. This program includes attention to reliability factors during product design, the support of stringent Quality Control requirements, and compulsory corrective action procedures. These measures, together with conservative specifications have made the name Endevco synonymous with reliability.

ENDEVCO CORPORATION, 30700 RANCHO VIEJO ROAD, SAN JUAN CAPISTRANO, CA 92675 USA (949) 493-8181 fax (949) 661-7231

0298