

Specification sheet

CF 370

FAD 8X4 Rigid, Mixer



ENGINES

CF 370 MX-11 (270 kW / 367 hp)

CF 410 MX-11 (300 kW / 408 hp)

CF 450 MX-11 (330 kW / 449 hp)

GVM¹⁾

32000 kg

GCM²⁾

35500 kg

Max. front 14200 kg

Max. rear 19000 kg

CAB EXTERIOR

Day Cab with galvanised steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2300 mm.; LED daytime running lights; Electrically adjustable mirrors; Front view mirror.

Optional

02106 Sleeper Cab	09983 Fog lights
01137 Space Cab	09984 Fog lights and cornering lights
01226 Cab suspension air	06593 Skylights
01174 External sun visor green translucent	06628 One hazard beacon light at co-driver side
00847 Air horns, single set	06627 One hazard beacon light at driver side
09006 Air horns, double set	06629 Two hazard beacon lights

AERODYNAMICS

Optional

04906 Side collars

COLOURS

Cab colour H3279 Brilliant White; Head lamp panel and bumper: Brilliant White; Chassis colour grey..

Optional

06485 Head lamp panel and bumper: cab colour	09933 Head lamp panel and bumper: Stone Grey
--	--

CAB INTERIOR

Cab interior trim colour Dark Sand; Cab interior decoration Black Rock; Driver seat: Comfort Air; Co-driver seat: basic; Automatic Temperature Control and airco; Pollen filter; Roof hatch glass, manual control.

Optional

09271 Steering wheel, leather, colour black	07746 Co-driver seat: Super Air
07240 Steering wheel, leather, Exclusive	07748 Co-driver seat: Xtra Leather Air
07152 Cab interior trim colour Exclusive	00967 Seat belts red
07592 Cab interior decoration Argenta	02117 Third seat
07591 Cab interior decoration Rustica	06539 Refrigerator
07733 Driver seat: Luxury Air	06783 Lower bunk foam mattress
07736 Driver seat: Super Air	06784 Lower bunk mattress Xtra Comfort
07737 Driver seat: Xtra Leather Air	06676 PL light in cab ceiling
07741 Co-driver seat: Comfort Air	06970 Automatic Cab Climate Control
07743 Co-driver seat: Luxury Air	

COMMUNICATION AND DRIVING MANAGEMENT

Tachograph digital, Stoneridge 1C; Speed limiter setting 85 km/h; Eco off 90 km/h; Antennas: radio, 2x cellular, GNSS; Cruise control.

Optional

09681 Preparation for Maut	09909 Adaptive Cruise Control (ACC) with FCW
08450 Luxury speaker system with 6 speakers	08023 Adaptive Cruise Control with FCW and AEBS-3
07117 Radio/USB player, 2 speakers	06991 Predictive Cruise Control
07261 TruckPhone	

SAFETY AND SECURITY

No Lane Departure Warning System; No vehicle stability control; Basic engine immobiliser system.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	09827 Side camera system
09828 Front camera system	01723 No reverse warning

SUSPENSION AND AXLES

Front axles load 7.10 + 7.10 t; Rear: 2x 9.50 t, trapezium, SR1132T.

WHEELS AND TYRES

Front axle(s): 295/80R22.5; Second front or leading axle: 295/80R22.5; Driven rear axle(s): 295/80R22.5; Second driven rear or trailing axle: 295/80R22.5; Disc wheels steel, silvergry; Wheel protection rings silvergry.

Optional

16152 Tyre makes and types

DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 270 kW (367 hp) at 1600 rpm. Maximum torque 1900 Nm at 900-1125 rpm.; Exhaust emission Euro 6; No engine idle shutdown; Automated gearbox, TraXon, 12 speeds; Gearbox ratio 12.92-0.77; Rear axle ratio 3.73.

Optional

04523 Manual gearbox, 16 speeds	03720 No ASR
---------------------------------	--------------

BRAKE SYSTEM

MX Engine Brake; Ventilated disc brakes at front, rear tandem axle with drum brakes. Dual circuit air system with electronic control (EBS). Twin cylinder air compressor with heated dryer and economy mode..

Optional

09920 No MX Engine Brake	02715 ZF Intarder
--------------------------	-------------------

CHASSIS

Wheelbase 5.70 m / rear overhang 1.65 m; Side member height 310 mm; Standard component location; Exhaust pipe vertical, high; Aluminium fuel tank 220 l RH, height 580 mm; Tank for AdBlue® 45 l, right-hand side chassis; Front underrun protection (FUP); Spray suppression.

Optional

06610 Exhaust pipe horizontal, low	07070 Spare wheel carrier left-hand side
08640 Air tanks steel	03323 Rear light with LEDs

DRAWBAR AND TRAILER EQUIPMENT

Closing member; No pneumatic trailer connection; No electric trailer connection.

Optional

08026 Trailer coupling Rockinger D=13.0	07029 D-value cross member D=13.7
---	-----------------------------------

BODIES AND PREPARATIONS FOR BODYING

Application connector on the cab front.

Optional

04331 Appl connector including air control prep 09209 Chassis preparation for mixer application

06692 Application connector chassis

POWER TAKE-OFF (PTO)

Optional

16148 PTO types and positions

ELECTRICAL POWER SUPPLY

Alternator 80 A, batteries 2x 175 Ah..

Optional

06460 Alternator 120 A 07671 Batteries 2x210Ah AGM C-type

08775 Alternator 150 A 06440 Batteries 2x230Ah

GVM AND GCM

Chassis weight related technical GVM max 32000 kg; Driveline related max GCM 35500 kg class 3.

Optional

01207 Driveline related max GCM 35500 kg class 2

APPLICATION CONDITIONS

Air intake on the cab roof.

Optional

09961 Cyclonic air intake behind the cab

SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle, 2nd year driveline and 1st year breakdown.; ITS service.

Optional



08311 Service interval extended



Go to [DAF.com](https://www.daf.com) to configure your own perfect DAF.

CF 370

FAD 8X4 Rigid, Mixer

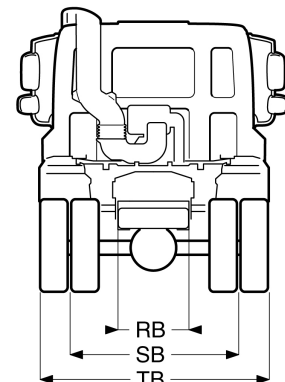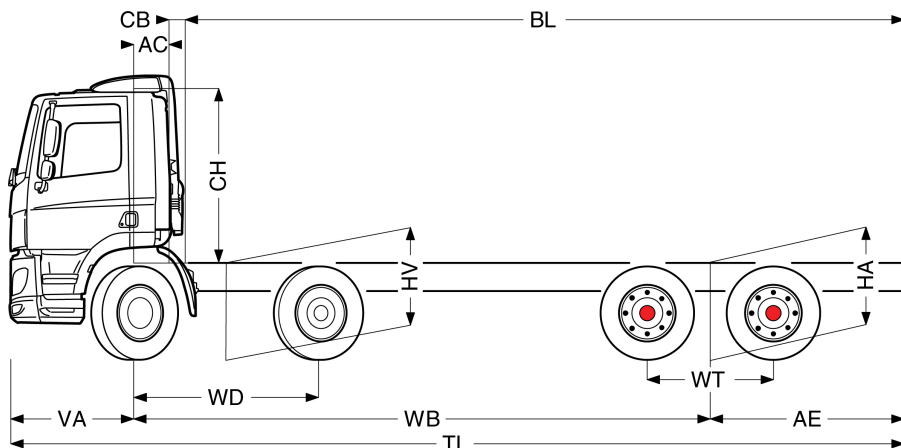

	Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions										
	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾	
DAY CAB	5,05	1,65	6423	2929	9352	7777	16071	22648	0,39	0,28	1,94	6,00	6,42	8,07	1,17	1,12	18,39	19,67	
	5,30	1,65	6394	3006	9399	7806	15994	22601	0,39	0,28	1,94	6,31	6,75	8,32	1,17	1,12	19,12	20,41	
	5,70	1,65	6362	3120	9481	7838	15880	22519	0,39	0,34	1,94	6,69	7,18	8,72	1,17	1,12	20,28	21,58	
	6,40	2,15	6269	3320	9589	7931	15680	22411	0,39	0,34	1,94	7,55	8,11	9,92	1,17	1,11	22,32	23,63	
SLEEPER CAB	5,05	1,65	6497	2925	9422	7703	16075	22578	0,82	0,28	1,94	5,16	5,57	8,07	1,17	1,11	18,39	19,67	
	5,30	1,65	6467	3002	9469	7733	15998	22531	0,82	0,28	1,94	5,47	5,91	8,32	1,17	1,11	19,12	20,41	
	5,70	1,65	6426	3117	9543	7774	15883	22457	0,82	0,34	1,94	5,85	6,33	8,72	1,17	1,11	20,28	21,58	
	6,40	2,15	6333	3318	9651	7867	15682	22349	0,82	0,34	1,94	6,70	7,26	9,92	1,17	1,11	22,32	23,63	
SPACE CAB	5,05	1,65	6625	2896	9521	7575	16104	22479	0,82	0,28	2,62	5,19	5,62	8,07	1,17	1,11	18,39	19,67	
	5,30	1,65	6594	2975	9568	7606	16025	22432	0,82	0,28	2,62	5,50	5,95	8,32	1,17	1,11	19,12	20,41	
	5,70	1,65	6496	3070	9566	7704	15930	22434	0,82	0,16	2,62	6,24	6,72	8,72	1,17	1,12	20,28	21,58	
	6,40	2,15	6405	3280	9685	7795	15720	22315	0,82	0,16	2,62	7,09	7,65	9,92	1,17	1,11	22,32	23,63	
OTHER DIMENSIONS		VA: 1,37	WD: 2,05	WT: 1,40	HV ¹³⁾ : 1,08	HV ¹⁴⁾ : 1,00	RB: 0,79	SB: 1,82	TB ¹⁵⁾ : 2,45										

1) GVM in conformity with registration documents.
 2) GCM in conformity with registration documents.
 3) Axle load with standard tyre size.
 4) Chassis and cab weight calculated with: Standard specification items only with 220 litres of fuel, 45 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.
 5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
 6) CB is based on standard air intake and/or exhaust.
 7) Cab height is measured from frame member to closed cab roof hatch. With air intake on cab roof add: 0.14 m (for MX-11); add 0.21 m for MX-13.

8) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.
 9) Unladen height at centre of driven axle(s).
 10) Laden height at centre of driven axle(s).
 11) TK = turning circle between kerbs.
 12) TW = turning circle between walls.
 13) Unladen height at centre of front axle(s).
 14) Laden height at centre of front axle(s).
 15) TB is overall width at rear. (At lower cab step 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.