



MICROWAVE SWITCHES & RF COAXIAL RELAYS



THERE IS NO SUBSTITUTE
FOR EXPERIENCE



**DowKey®
Microwave**
CORPORATION

FOUNDED 1945

A **DOVER** TECHNOLOGIES COMPANY

	Maximum Frequency	RF Connector Type	Page
DowKey Microwave Catalog			3
DowKey Part Numbering System			4
RF Power Chart			5
Ordering Information			6
DowKey Microwave Switch Products			
401 Series Failsafe SPDT Switches	26.5 GHz	SMA	8
401 Series Latching SPDT Switches	26.5 GHz	SMA	10
402 Series Failsafe SPDT Switches	12.4 GHz	N	12
402 Series Latching SPDT Switches	12.4 GHz	N	14
403 Series Failsafe SPDT Switches	26.5 GHz	SMA	16
411C Series Failsafe Transfer Switches	18 GHz	SMA	18
411C Series Latching Transfer Switches	18 GHz	SMA	20
412 Series Failsafe Transfer Switches	12.4 GHz	N	22
412 Series Latching Transfer Switches	12.4 GHz	N	24
509 Series Failsafe SPDT Switches	12.4 GHz	PIN	26
521 Series Failsafe SPDT Terminated Switches	18 GHz	SMA	28
521 Series Latching SPDT Terminated Switches	18 GHz	SMA	30
531-561 Series Normally Open Terminated Multi-position Switches	18 GHz	SMA	32
531-561 Series Latching Multi-position Switches	18 GHz	SMA	34
531-561 Series Latching Terminated Multi-position Switches	18 GHz	SMA	36
531-561 Series Normally Open Multi-position Switches	12.4 GHz	N	38
531-561 Series Latching Multi-position Switches	12.4 GHz	N	40
535-565 Series Normally Open Multi-position Switches	18 GHz	SMA	42
571-581 Series Normally Open Multi-position Switches	18 GHz	SMA	44
571-581 Series Normally Open Terminated Multi-position Switches	18 GHz	SMA	46
571-581 Series Latching Multi-position Switches	18 GHz	SMA	48
571-581 Series Latching Terminated Multi-position Switches	18 GHz	SMA	50
591-5A1 Series Normally Open Multi-position Switches	18 GHz	SMA	52
591-5A1 Series Normally Open Terminated Multi-position Switches	18 GHz	SMA	54
591-5A1 Series Latching Multi-position Switches	18 GHz	SMA	56
591-5A1 Series Latching Terminated Multi-position Switches	18 GHz	SMA	58
433-443 Series In-line Latching Multi-position Switches	18 GHz	SMA	60
473-4A3 Series In-line Latching Multi-position Switches	18 GHz	SMA	62
4C3 Series In-line Latching Multi-position Switches	18 GHz	SMA	64
46 Series DPDT Failsafe Switches	1000 MHz	BNC, TNC	66
54 Series SPDT Failsafe Switches	3000 MHz	N, BNC, TNC	68
60 Series SPDT Failsafe Switches	1000 MHz	N, BNC, UHF	70
63 Series SPDT Failsafe Switches	3 GHz	N	72
64 Series Transfer Failsafe Switches	3 GHz	N	74
66 Series SPDT Failsafe Switches	500 MHz	F	76
77 Series SPDT Failsafe Switches	1000 MHz	BNC, F	78

Table of Contents

	Maximum Frequency	RF Connector Type	Page
DowKey Microwave Switch Products (cont.)			
78 Series Multi-position Manual Switches	450 MHz	N, BNC, UHF	80
79 Series Bypass Failsafe Switches	3 GHz	TNC	82
116 Series SP4T Failsafe Switches	2000 MHz	N, BNC, TNC	84
164 Series SPDT Failsafe Switches	1000 MHz	BNC, TNC	86
167 Series Transfer Failsafe Switches	1000 MHz	N, UHF	88
169 Series SPDT Failsafe Switches	2000 MHz	BNC	90
260 Series DPDT 260B Series By-Pass Failsafe Switches	1000 MHz	N, BNC, UHF	92
310 Series SPDT High Power Vacuum Switches	400 MHz	N, HN, SC	94
DowKey/Transco Microwave Switch Products			
Cross Reference Guide			98
909 Type DO Series SPDT Latching Switches	18 GHz	SMA	100
919 Type DO Series SPDT Failsafe Switches	18 GHz	SMA	102
905-915 Type DO Series SPDT Latching and Failsafe Switches	26.5 GHz	3.5mm	104
805 Type D Series SPDT Latching Switches	12.4 GHz	TNC, N	108
810 Type D Series SPDT Failsafe Switches	12.4 GHz	TNC, N	110
900-910 Type DT Series Latching and Failsafe Switches	12.4	TNC	112
800-810 Type DX Series High Power Latching and Failsafe Switches	6.5 GHz	SC	114
808-818 Type PD Series SPDT (MBB) Latching and Failsafe Switches	12.4 GHz	TNC, N	116
700 Type HO Series Transfer Latching Switches	18 GHz	SMA	118
710-715 Type HO & HOF Series Transfer Failsafe Switches	18 GHz	SMA	120
705-745 Type HO Series Transfer Latching and Failsafe Switches	26.5 GHz	3.5mm	122
300 Type H Series Transfer Latching Switches	12.4 GHz	N, TNC	126
310 Type H Series Transfer Failsafe Switches	12.4 GHz	N, TNC	128
700-710 Type HT Series Transfer Latching and Failsafe Switches	12.4 GHz	TNC	130
300-310 Type HX Series Transfer High Power Latching and Failsafe	6.5 GHz	SC	132
143-146 Type MO Series Multi-position Selective Switches	18 GHz	SMA	134
143-146 Type MOI Series Multi-position Selective Switches	18 GHz	SMA	136
154-156 Type MO Series Multi-position Selective Switches	26.5 GHz	3.5mm	138
133-136 Type M Series Multi-position Selective Switches	12.4 GHz	N, TNC	140
133-136 Type MX Series High Power Multi-position Selective Switches	6.5 GHz	SC	142
DowKey/Transco Waveguide Switch Products			
Cross Reference Guide			144
Reference Table for Rigid Rectangular Waveguide			145
Type GR Series 3 or 4 Port Latching and Failsafe Switches	4-18 GHz	WR284-WR62	146
Type GF Series SPDT & Transfer Latching and Failsafe Switches	8.2 GHz	WRD350D24	148
Type GF Series Transfer Latching and Failsafe Switches	18 GHz	WRD750D24	150

Established in 1945, DowKey became the largest producer of electro-mechanical switches when the company was acquired in 1996 by K&L Microwave/Transco under the umbrella of Dover Technologies, division of Dover Corporation with annual revenues in excess of 4 billion dollars.

The company offers switches in the three major markets - Commercial, Military, and Hi-Rel space. DowKey Microwave products are currently used in airborne, sea ground-based, military, missiles, and EW systems as well as commercial communication and instrumentation systems, medical equipment, cellular telephone, two-way paging systems, PCS, PCN, test equipment, commercial airlines and satellite applications.

Although the product specifications listed in the catalog are for commercial switches, Military specification and special environment products are available upon request. All of the switches are specifically designed to take the maximum advantage of standardized parts to minimize cost and delivery.

In the last decade, DowKey's market share has grown at a rapid pace. To meet the demands of a growing company, DowKey has assembled the most experienced management and engineering team in the industry - a team that offers innovative approaches to designs - a team that improves and brings new life to the product line.

These include:

- Broad selection of catalog RF and Microwave switches operating from DC to 18.5 GHz.
- Custom switches operating up to 26.5 GHz.
- Hi-Rel space qualified switches for military and commercial satellites.
- Complex devices using innovations that include other components to form switch matrixes, switch attenuators, IEEE 488 compatible components, and other unique design solutions to our customer's requirements are available.

- A. DowKey Radial multithrow switches in SP3T - SP10T configurations controlled by TTL, or binary logic.
- B. DowKey INTELLIGENT RELAY IN-LINE series of multithrow switches with binary logic inputs.

DowKey, located in Ventura, California - one hour north of the Los Angeles airport, is in the process of expanding its facility to 36,000 square feet. The current facility houses a certified clean room, environmental testing lab with both thermal and thermal shock capability, two 18 inch and one 24 inch diameter thermal vacuum chambers, and a computer controlled shock and vibration system (capable of up to 100g's).

DowKey has made a substantial commitment to quality by providing formal training in team work and quality awareness to every employee of the company.

The DowKey inspection system fully complies with MIL-I-45208. Qualification testing is performed to customer specific requirements including MIL-PRF-3928E. Solderers and soldering inspectors are certified to MIL-STD-2000A. The document change control system insures that product design, methods, and processes remain consistent with customer requirements. DowKey is currently pursuing ISO 9001 certification.

This catalog is intended to be used as a guide in selecting the proper type of switch or switching function for a given application and to identify product families we have delivered to make the system designer's life a little easier. It is important to note that DowKey Microwave does not limit itself to catalog products and will gladly entertain variations to the published specifications. We welcome requests regarding custom integrated components and switch function assemblies. Drawing on DowKey Microwave's technical expertise we can offer a cost effective approach for our customers.

DowKey Part Numbering System

X A B C - D E F G H I J

- (X) RELAY FAMILY**
- 2 Low Frequency
 - 4/5 50 Ohm System
 - 7 75 Ohm System

- (A) CONFIGURATION**
- | | |
|------------|---------|
| 0 SPDT | A SP10T |
| 1 Transfer | B SP11T |
| 2 SPST | C SP12T |
| 3 SP3T | D 6P7T |
| 4 SP4T | |
| 5 SP5T | |
| 6 SP6T | |
| 7 SP7T | |
| 8 SP8T | |
| 9 SP9T | |

- (B) SIZE**
- 1 Std. Case, normally SMA connectors (Radial)
 - 2 Std. Case, normally N Connectors
 - 3 Small Case, normally SMA (Multithrow)
 - 4 Intermediate Cavity, SMA/TNC
 - 5 Miniature Radial
 - 6 Std. Case, normally N connectors (Radial)
 - 9 Microminiature Switch

- (C) SPECIAL OPTIONS**
- | | |
|----------------------------|-------------------------------|
| A High Power | K 26.5 GHz |
| B Bypass (2-4) | L Flange Mount Cavity |
| C Special Mounting Bracket | M Fast Switching |
| | N Remove STD Mounting Bracket |
| D Bypass (1-2) | P Power Connector |
| E Bypass (3-4) | R Reverse Polarity |
| F Bypass (1-3) | S Seal Epoxy, Sand & Dust |
| G Make Before Break | T -55°C to +85°C |
| H HI-REL | |
| I Seal, Immersion | |
| J "D" Type Connector | |

- (D) ACTUATOR COIL TYPE**
- 1 Manual
 - 2 Failsafe, Position 1
 - 3 Pulse Latching
 - 4 Latching, Self Cutoff
 - 5 Normally Open
 - 6 Failsafe, Suppression Diodes
 - 7 Pulse Latching, Suppression Diodes
 - 9 Normally Open, Suppression Diodes

- (J) SPECIAL OPTIONS**
- A TTL HI, Commercial (2.4 - 5.5 Vdc)
 - B TTL HI, Military (2.4 - 5.5 Vdc)
 - C MOSFET Driver, Pulse Latch
 - E CMOS BCD Decoding Logic & MOSFET Driver, Commercial
 - L TTL Logic Low, Commercial (0.0 - 0.8 Vdc)
 - G Other Special Circuit


- (I) TERMINATIONS**
- | | |
|---------|---------------------|
| 1 Short | 5 50Ω, 5W |
| 2 Open | 6 50Ω, 10W |
| 3 50 Ω | 7 50Ω, Term, Port 1 |
| 4 75 Ω | 8 50Ω, 2W External |

- (H) AUXILIARY/INDICATOR CONTACTS**
- 0 None
 - 2 Mechanical SPST
 - 3 Mechanical SPDT
 - 4 Mechanical DPDT

- (FG) CONNECTORS**
- 01 N
 - 02 BNC
 - 03 TNC
 - 04 UHF
 - 05 C
 - 07 BMA (OSP)
 - 08 SMA
 - 09 3.5mm (SMA Interface)
 - 14 TPS
 - 19 Pins (PC Board Drop-in)
 - 25 N, High Isolation (NC Port Only)
 - 26 BNC, High Isolation (NC Port Only)
 - 28 UHF, High Isolation (NC Port Only)
 - 32 F (75 Ω)
 - 44 BNC (75Ω)
 - 51 HN
 - 53 SC
 - 72 F (75Ω) High Isolation (NC & NO Ports Only)

- (E) ACTUATOR COIL VOLTAGE**
- | | |
|----------|-----------|
| 0 Manual | 5 110 Vdc |
| 1 6 Vdc | 6 110 Vac |
| 2 12 Vdc | 7 20 Vdc |
| 3 28 Vdc | 8 24 Vdc |
| 4 48 Vdc | 9 15 Vdc |

This chart is based on the following conditions:
 Ambient Temperature= 40° C; Altitude= Sea Level; VSWR= 1.0:1; Non-switching
 UHF connectors are not recommended for applications above 300MHz.
 Please consult factory for additional information.

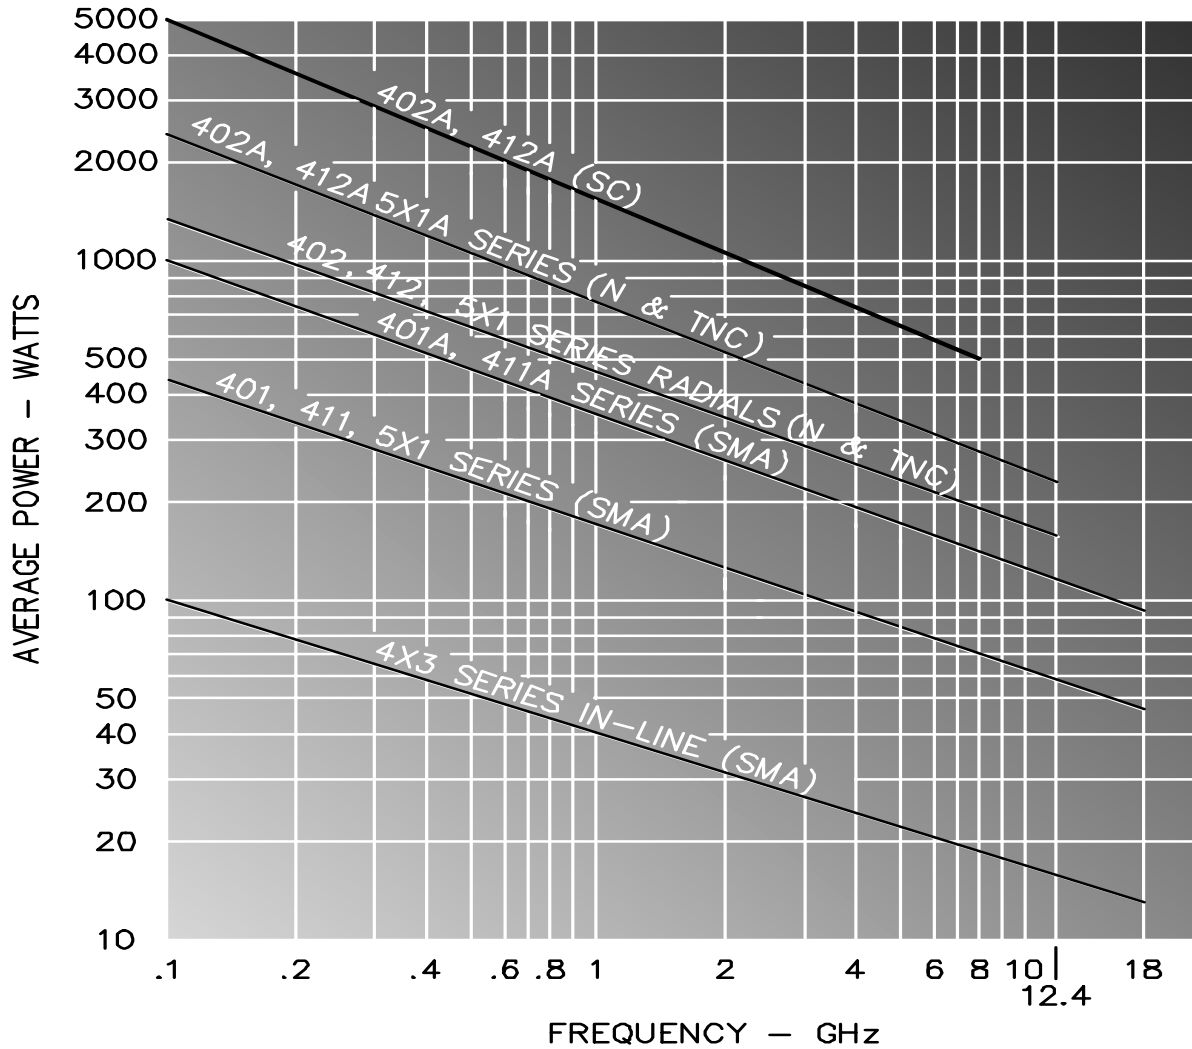

VSWR	Derating Factor	VSWR	Derating Factor
1.5:1	.96	3.5:1	.07
2.0:1	.88	4.0:1	.64
2.5:1	.84	4.5:1	.06
3.0:1	.75	5.0:1	.56

PACKAGING

All products shipped from the DowKey facility are packaged in accordance with best commercial practices unless otherwise specified in the contract or purchase order.

SHIPPING

Shipment by commercial air freight is recommended to ensure safe handling and prompt deliver. Orders within the continuous U.S. will be shipped Via United Parcel Service unless other directions are received.

TERMS

Standard terms are net, 30 days, F.O.B. Ventura California. There is a \$250 minimum order for shipments to domestic (USA) destinations.

DELIVERY

Most standard products are available from stock or within typical manufacturing lead time of 6-8 weeks after receipt of an order.

PRICES AND SPECIFICATIONS

Quotations for standard catalog items, in any quantity, are available from the factory or the nearest factory authorized representative. Quotations are normally valid for a period of sixty days. Special item pricing is available after definition of customer requirements and consultation with DowKey Microwave Corporation engineering, manufacturing and sales.

APPLICATIONS/TECHNICAL ASSISTANCE

Approximately one-half of DowKey Microwave Corporation's products are items built to customer specifications. These items have been designed and manufactured to satisfy unique requirements. DowKey provides a knowledgeable and experienced engineering staff to work closely with customers in systems design and applications development. This service is available for either the complete design of specialized switching components or switching function subsystems, or in minor modification to existing standard products to meet a customer's specific requirements. DowKey applications engineers will work co-operatively with customer engineering staff to fulfill special requirements.

WARRANTY

DowKey Microwave Corporation warrants all switch products to be free of defects in material or workmanship for a period of one year after the date of initial shipment. The limit of liability under this warranty is to repair or replace any product or part thereof which is returned by the purchaser, and proves defective after examination by DowKey. This warranty does not extend to any products mishandled, misused, or subjected to abuse or neglect in storage, transportation, or use. Please call DowKey's RMA department to receive a return authorization number prior to returning any item under this warranty. Items being returned from locations outside of the U.S. should be sent Via Air Parcel Post unless other means are specifically agreed upon by DowKey Microwave Corporation. Repairs or alterations made without consent or knowledge of DowKey Microwave Corporation will invalidate this warranty. This warranty supercedes all others, either expressed or implied.

DowKey MICROWAVE CORPORATION continually improves products as new technologies and components become available. We, therefore, reserve the right to alter, amend, discontinue or replace any product and or specifications at our sole discretion in this catalog without prior notice.

DowKey®

Microwave Switches



**DowKey®
Microwave**
CORPORATION



DowKey® 401 Series Failsafe

Specifications :

Operating Voltage:

(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)

Coil Current (Nominal):

12 Vdc 185 mA
28 Vdc 90 mA

Switching Time:

15 mS maximum

Operating Temperature:

-25°C to +65°C

Mechanical Life, Cycles:

1 x 10⁶ minimum

Vibration, Operating:

10G RMS, 20-2000 Hz

Mechanical Shock, Non-Operating:

50G, 1/2 Sine, 11mS

Nominal Weight:

2.5 oz., (71g.)

The DowKey Microwave 401 Series SPDT switches perform broadband high performance switching functions extending to 26.5 GHz on selected units.

The 401 Series switching mechanism has a break-before-make configuration, with a balanced actuator which provides excellent tolerance to shock and vibration.

The 401 Series switch utilizes DowKey designed connectors featuring a mechanically captivated center contact which eliminates epoxy staking, and reduces RF leakage. Due to the small size of these switches, only SMA connectors are available.

Typical applications for the 401 Series include:

- Test Equipment Band Selection
- Switch Matrixes
- EW and Missile Systems
- Microwave Radio

RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
0-1	1.10	85	0.10	100
1-4	1.20	80	0.20	50
4-8	1.30	70	0.30	35
8-12	1.40	65	0.40	25
12-18	1.50	60	0.50	10
*18-26.5	1.50	60	0.60	10

* "K" option only. Ex: 401K-2208


Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Standard	with Mechanical Indicators
12 Vdc	SMA	401-2208	401-220832
28 Vdc	SMA	401-2308	401-230832

TTL Compatible Logic

12 Vdc	SMA	401-220802A	401-220832A
28 Vdc	SMA	401-230802A	401-230832A

Mechanical


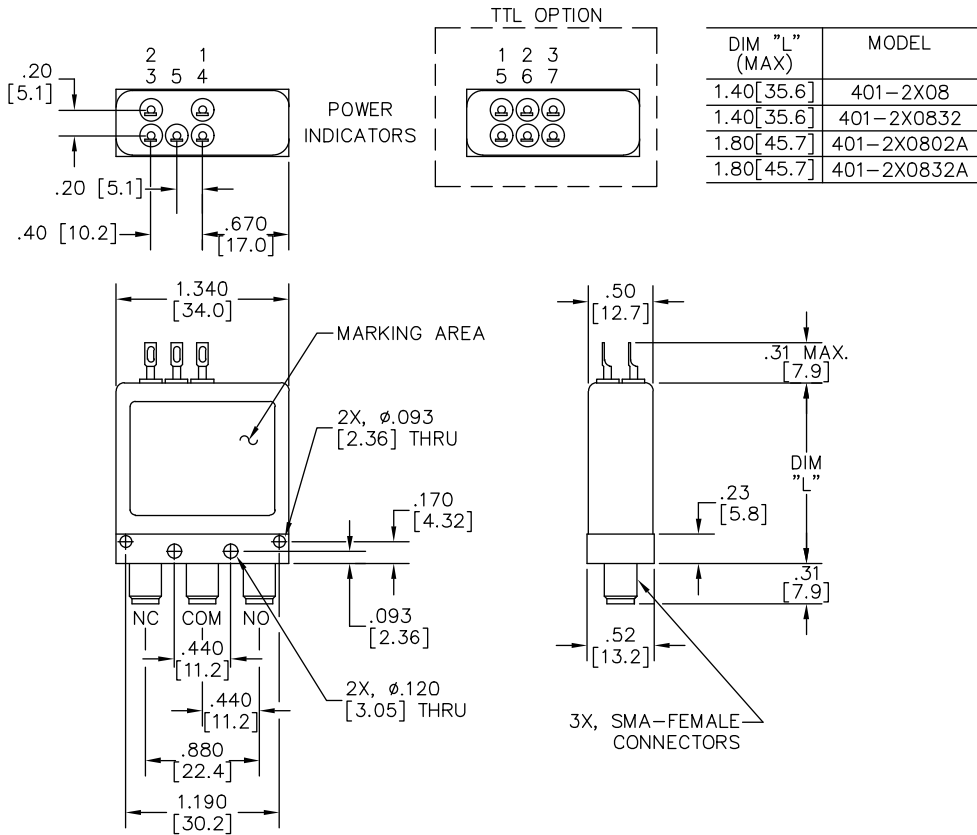


DIM "L" (MAX)	MODEL
1.40 [35.6]	401-2X08
1.40 [35.6]	401-2X0832
1.80 [45.7]	401-2X0802A
1.80 [45.7]	401-2X0832A

Available Options

- Immersion Seal
- 9 PIN "D" Plug
- 5ms Switching Time
- Increased Power Handling
- Operating Voltages:
15, 20, 24 Vdc
- Jan TX TTL Drive Components
- 55°C to +85°C Operation
- DC - 26.5 GHz Operation

Electrical

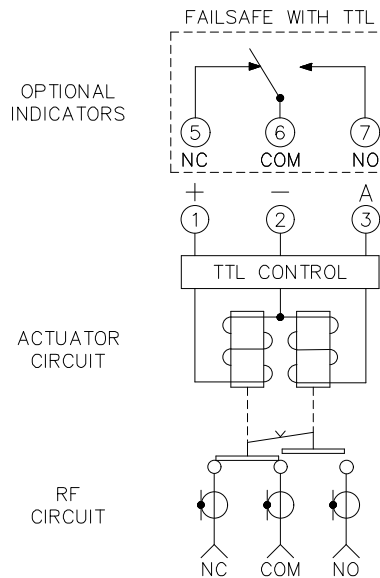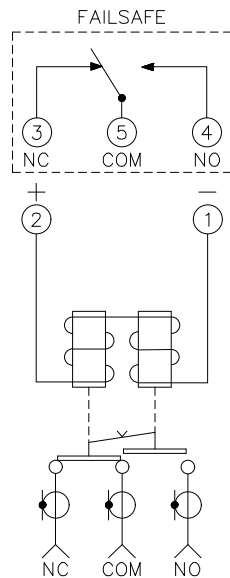

RF PATH	INDICATOR PATH	LOGIC INPUT "A"
NC-COM	NC-COM	0
NO-COM	NO-COM	1

"0" = 0.0V-0.8V
"1" = 2.4V-5.5V



**DowKey®
Microwave**
CORPORATION



DowKey® 401 Series Latching

Specifications :

Operating Voltage:

(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)

Coil Current (Nominal):

12 Vdc 218 mA
28 Vdc 108 mA

Switching Time:

15 mS maximum

Operating Temperature:

-25°C to +65°C

Mechanical Life, Cycles:

1 x 10⁶ minimum

Vibration, Operating:

10G RMS, 20-2000 Hz

Mechanical Shock, Non-Operating:

50G, 1/2 Sine, 11mS

Nominal Weight:

2.5 oz., (71g.)

The DowKey Microwave 401 Series SPDT switches perform broadband high performance switching functions extending to 26.5 GHz. The 401 Series switching mechanism has a break-before-make configuration, with a balanced actuator which provides excellent tolerance to shock and vibration.

Due to the small size of these switches, only the SMA connectors are available. These DowKey designed connectors feature a mechanically captivated center contact which eliminates epoxy staking, and reduces RF leakage. All self cutoff models include coil suppression diodes.

Typical applications for the 401 Series include:

- Test Equipment Band Selection
- Switch Matrixes
- EW and Missile Systems
- Microwave Radio

RF Characteristics


Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
0-1	1.10	85	0.10	100
1-4	1.20	80	0.20	50
4-8	1.30	70	0.30	35
8-12	1.40	65	0.40	25
12-18	1.50	60	0.60	10
*18-26.5	1.50	60	0.60	10

* "K" option only. Ex: 401K-3208

Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Standard SPDT	with Mechanical Indicators
Pulse Latch			
12 Vdc	SMA	401-3208	401-320832
28 Vdc	SMA	401-3308	401-330832
Latching with Self Cut-off			
12 Vdc	SMA	401-4208	401-420832
28 Vdc	SMA	401-4308	401-430832
Latching with Self Cut-Off, TTL Compatible			
12 Vdc	SMA	401-420802A	401-420832A
28 Vdc	SMA	401-430802A	401-430832A


Mechanical

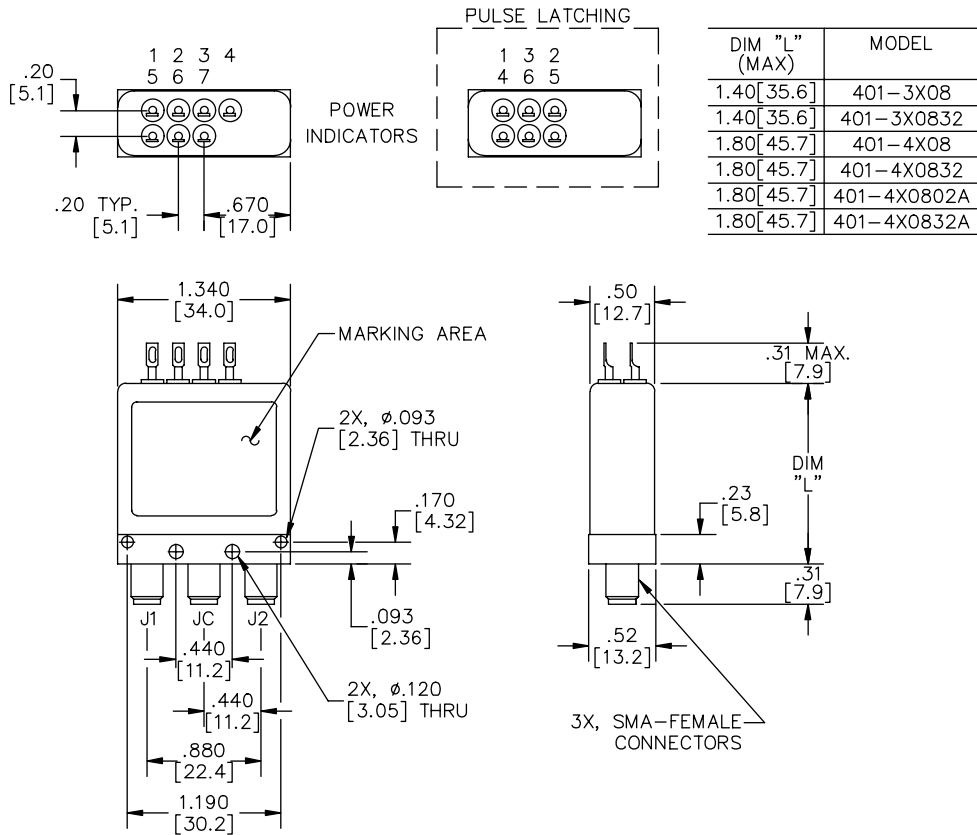

Available Options

- Immersion Seal
- 9 PIN "D" Plug
- 5ms Switching Time
- Increased Power Handling
- Operating Voltages:
15, 20, 24 Vdc
- 55°C to +85°C Operation
- DC - 26.5 GHz Operation

Electrical

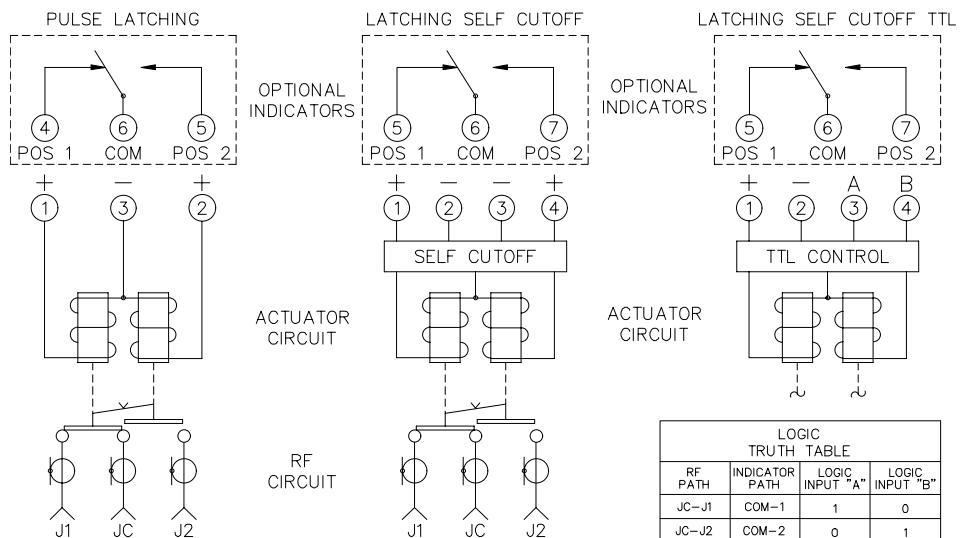

"0" = 0.0V-0.8V
"1" = 2.4V-5.5V



**DowKey®
Microwave**
CORPORATION

The DowKey Microwave 402 Series switches are designed for high performance in microwave systems to 12.4 GHz. They are commonly used for any application where high isolation and low VSWR are required. The DowKey designed type "N" connector features a mechanically captivated center conductor which eliminates epoxy staking, and consequently, RF leakage. The balanced actuator is designed for uniform contact pressure in either switch position, which provides low and stable contact resistance over the life of the switch.



DowKey® 402 Series Failsafe

Specifications :

Operating Voltage:

(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)

Coil Current (Nominal):

12 Vdc 261 mA
28 Vdc 108 mA

Switching Time:

20 mS maximum

Operating Temperature:

-25°C to +65°C

Mechanical Life, Cycles:

1 x 10⁶ minimum

Vibration, Operating:

10G RMS, 20-2000 Hz

Mechanical Shock, Non-Operating:

50G, 1/2 Sine, 11mS

Nominal Weight:

9.0 oz., (260g.)

Typical applications for the 402 Series include:

- Main/Standby Switching of Transponders, Transmitters, Antennas
- Band Selection
- Polarization Switching


RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
0-1	1.15	85	0.15	350
1-2	1.20	80	0.20	250
2-4	1.25	70	0.25	150
4-8	1.35	65	0.35	120
8-12.4	1.50	60	0.50	100



Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Standard	with Mechanical Indicators
12 Vdc	N	402-2201	402-220132
28 Vdc	N	402-2301	402-230132
TTL Compatible Logic			
12 Vdc	N	402-220102A	402-220132A
28 Vdc	N	402-230102A	402-230132A

Mechanical

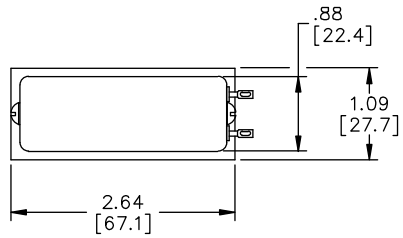



DIM "L" (MAX)	MODEL
2.30 [58.4]	402-2X01
2.30 [58.4]	402-2X0132
2.30 [58.4]	402-2X0102A
2.30 [58.4]	402-2X0132A

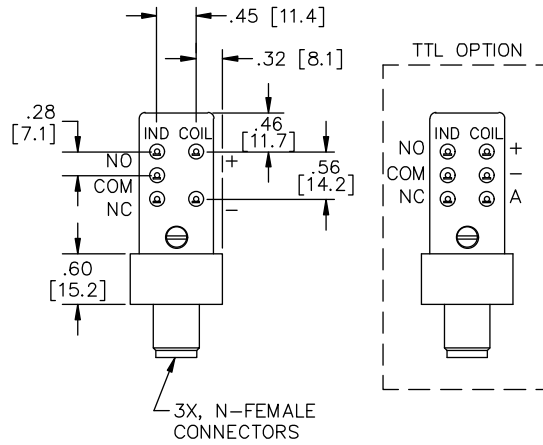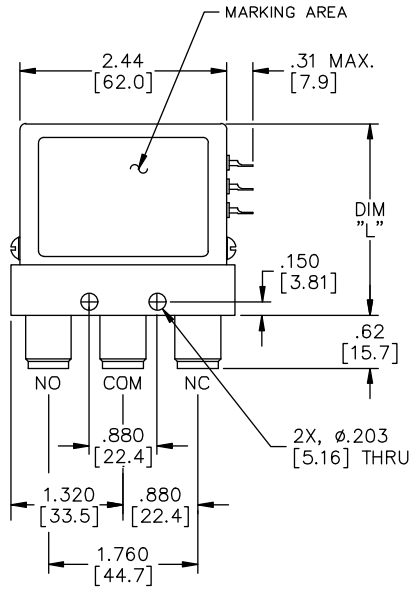

Available Options

- Immersion Seal
- 9 PIN "D" Plug
- Increased Power Handling
- Operating Voltages:
15, 20, 24 Vdc
- Jan TX TTL Drive Components
- 55°C to +85°C
- BNC, TNC Connectors
(Consult factory for RF characteristics)

Electrical

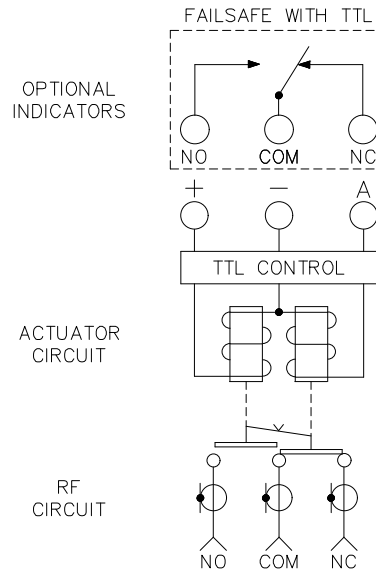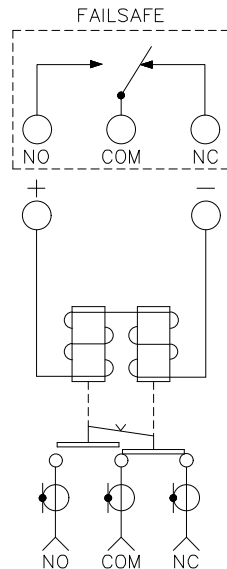

LOGIC TRUTH TABLE		
RF PATH	INDICATOR PATH	LOGIC INPUT "A"
NC-COM	NC-COM	0
NO-COM	NO-COM	1

"0" = 0.0V-0.8V
"1" = 2.4V-5.5V



**DowKey®
Microwave**
CORPORATION



DowKey® 402 Series Latching

Specifications :

Operating Voltage:

(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)

Coil Current (Nominal):

12 Vdc 300 mA
28 Vdc 127 mA

Switching Time:

20 mS maximum

Operating Temperature:

-25°C to +65°C

Mechanical Life, Cycles:

1 x 10⁶ minimum

Vibration, Operating:

10G RMS, 20-2000 Hz

Mechanical Shock, Non-Operating:

50 G, 1/2 Sine, 11 mS

Nominal Weight:

9.0 oz. (260g.)

The DowKey Microwave 402 Series switches are designed for high performance in microwave systems to 12.4 GHz. They are commonly used for any application where high isolation and low VSWR are required. The DowKey designed type "N" connector features a mechanically captivated center conductor which eliminates epoxy staking, and consequently, RF leakage. The balanced actuator is designed for uniform contact pressure in either switch position, which provides low and stable contact resistance over the life of the switch. A set of auxiliary contacts is optionally available.

Typical applications for the 402 Series include:

- Main/Standby Switching of Transponders, Transmitters, Antennas
- Band Selection
- Polarization Switching


RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
0-1	1.15	85	0.15	350
1-2	1.20	80	0.20	250
2-4	1.25	70	0.25	150
4-8	1.35	65	0.35	120
8-12.4	1.50	60	0.50	100




Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Standard	with Mechanical Indicators
Pulse Latch			
12 Vdc	N	402-3201	402-320132
28 Vdc	N	402-3301	402-330132
Latching with Self Cut-Off			
12 Vdc	N	402-4201	402-420132
28 Vdc	N	402-4301	402-430132
Latching with Self Cut-Off, TTL Compatible			
12 Vdc	N	402-420102A	402-420132A
28 Vdc	N	402-430102A	402-430132A

Mechanical

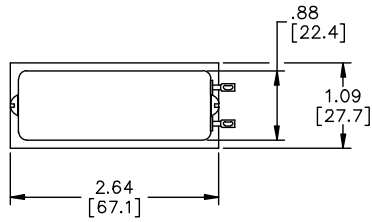




DIM "L" (MAX)	MODEL
2.30 [58.4]	402-3X01
2.30 [58.4]	402-3X0132
2.40 [61.0]	402-4X01
2.40 [61.0]	402-4X0132
2.40 [61.0]	402-4X0102A
2.40 [61.0]	402-4X0132A

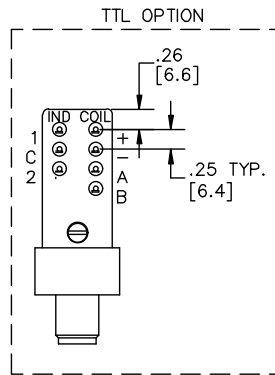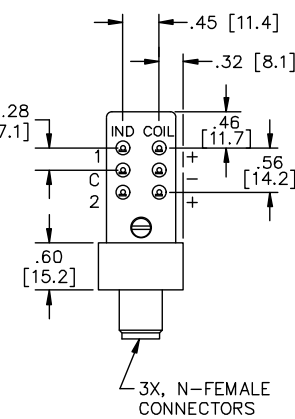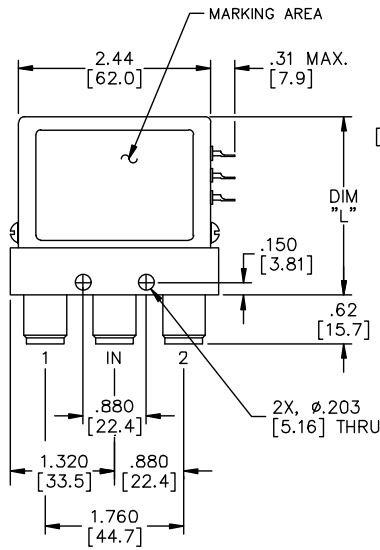

Available Options

- Immersion Seal
- 9 PIN "D" Plug
- Increased Power Handling
- Operating Voltages:
15, 20, 24 Vdc
- 55°C to +85°C
- BNC, TNC Connectors
(Consult factory for RF characteristics)

Electrical

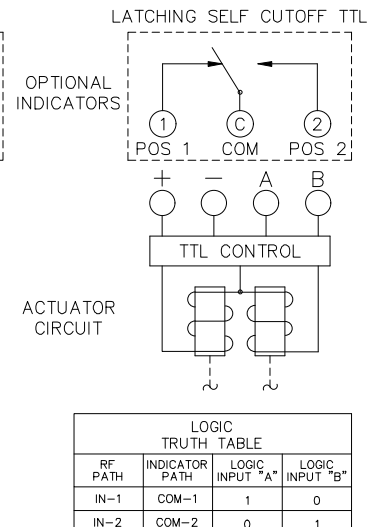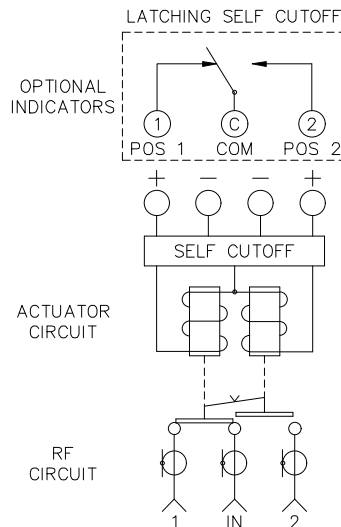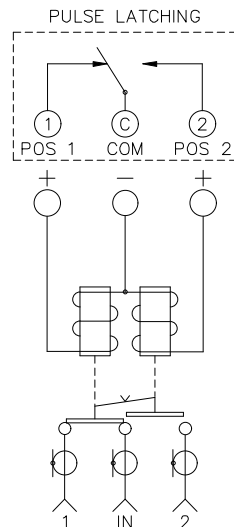

RF PATH	INDICATOR PATH	LOGIC INPUT "A"	LOGIC INPUT "B"
IN-1	COM-1	1	0
IN-2	COM-2	0	1

"0" = 0.0V-0.8V
"1" = 2.4V-5.5V



**DowKey®
Microwave**
CORPORATION



DowKey® 403 Series Failsafe

Specifications :

Operating Voltage:

(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)

Coil Current (Nominal):

12 Vdc 185 mA
28 Vdc 90 mA

Switching Time:

15 mS maximum

Operating Temperature:

-25°C to +65°C

Mechanical Life, Cycles:

1 x 10⁶ minimum

Vibration, Operating:

10 G RMS, 20-2000 Hz

Mechanical Shock, Non-Operating:

50 G, 1/2 Sine, 11 mS

Nominal Weight:

1.5 oz., (42g.)

The DowKey Microwave 403 Series SPDT switches perform broadband and high frequency, switching with extended performance to 26.5 GHz. The 403 Series switching mechanism uses the same break-before-make balanced actuator as the 401 Series failsafe switches. This actuator provides excellent tolerance to shock and vibration.

Due to the small size of these switches, only SMA connectors are available. These DowKey designed connectors feature a mechanically captivated center contact which eliminates epoxy staking, and reduces RF leakage.

Typical applications for the 403 Series include:

- Test Equipment Band Selection
- Switch Matrixes
- EW and Missile Systems
- Microwave Radio

RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
0-1	1.10	85	0.10	100
1-4	1.20	80	0.20	50
4-8	1.30	70	0.30	35
8-12	1.40	65	0.40	25
12-18	1.50	60	0.50	10
*18-26.5	1.50	60	0.50	10

* "K" option only. Ex: 403K-2208

Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Standard
12 Vdc	SMA	403-2208
28 Vdc	SMA	403-2308


TTL Compatible Logic

12 Vdc	SMA	403-220802A
28 Vdc	SMA	403-230802A

Mechanical




DIM "L" (MAX)	MODEL
1.18 [30.0]	403-2X08
1.40 [35.6]	403-2X0802A

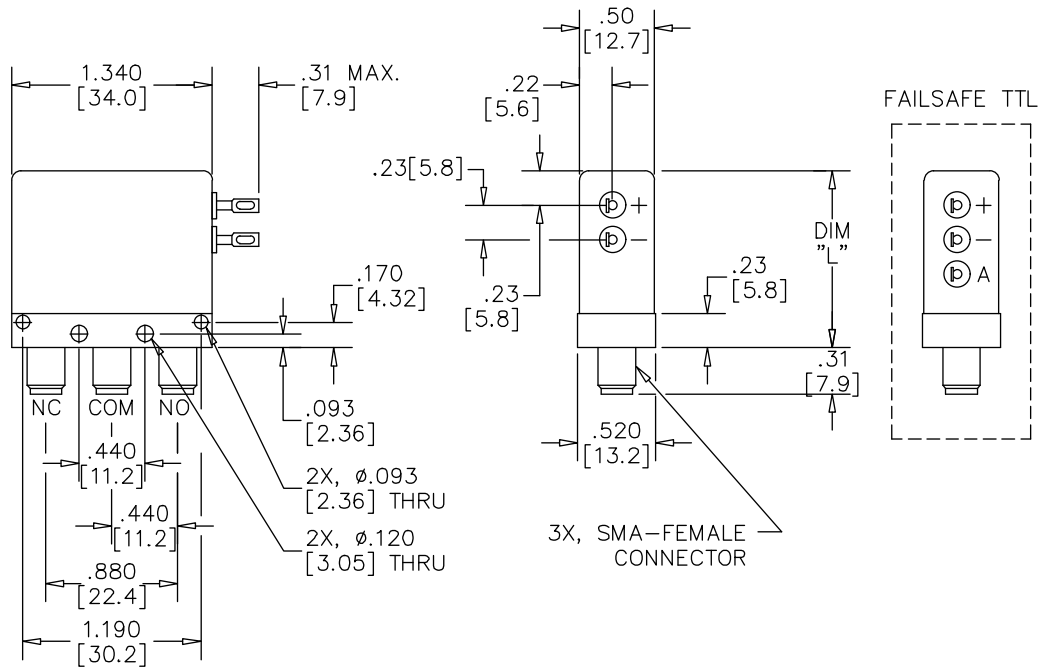

Available Options

- Immersion Seal
- Increased Power Handling
- Operating Voltages:
15, 20, 24 Vdc
- 55°C to +85°C Operation
- DC - 26.5 GHz Operation

Electrical

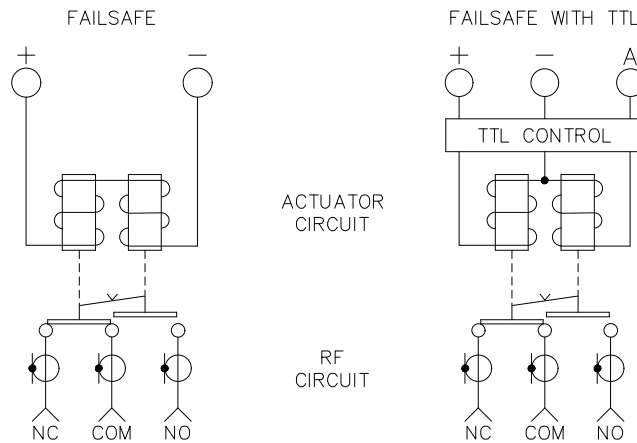

LOGIC TRUTH TABLE		
RF PATH	INDICATOR PATH	LOGIC INPUT "A"
NC-COM	NC-COM	0
NO-COM	NO-COM	1

"0" = 0.0V-0.8V
"1" = 2.4V-5.5V



**DowKey®
Microwave**
CORPORATION

The DowKey Microwave 411 Series is a failsafe transfer switch for use in applications where high isolation, low VSWR, and low insertion loss are critical. The DowKey designed connector features a mechanically captivated center conductor which eliminates epoxy staking, and consequently, RF leakage. The 411 Series features the same reliable balanced actuator designs as are found in the 401 Series.



DowKey® 411C Series Failsafe

Specifications :

Operating Voltage:

(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)

Coil Current (Nominal):

12 Vdc 364 mA
28 Vdc 138 mA

Switching Time:

20 mS maximum

Operating Temperature:

-25°C to +65°C

Mechanical Life, Cycles:

1 x 10⁶ minimum

Vibration, Operating:

10G RMS, 20-2000 Hz

Mechanical Shock, Non-Operating:

50 G, 1/2 Sine, 11 mS

Nominal Weight:

4.0 oz., (115g.)

Typical applications for the 411 Series include:

- Switch Matrixes
- Standby Transmitters with Dummy Load
- Alternate Antenna Select


RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
0-1	1.10	85	0.10	200
1-4	1.20	80	0.20	100
4-8	1.30	70	0.30	50
8-12	1.40	65	0.40	35
12-18	1.50	60	0.50	25

Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Standard	with Mechanical Indicators
12 Vdc	SMA	411C-2208	411C-220832
28 Vdc	SMA	411C-2308	411C-230832
TTL Compatible Logic			
12 Vdc	SMA	411C-220802A	411C-220832A
28 Vdc	SMA	411C-230802A	411C-230832A

Mechanical

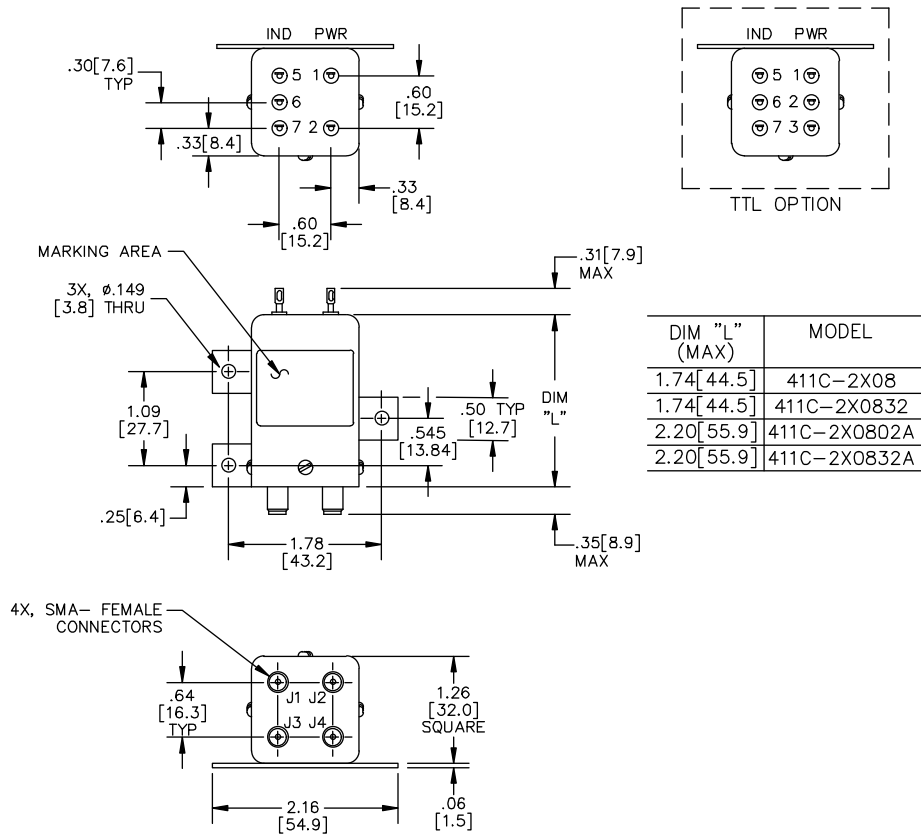

Available Options

BYPASS (2-4)

BYPASS (1-3)

BYPASS (1-2)

BYPASS (3-4)

9 PIN "D" Plug



Operating Voltages:
15, 20, 24 Vdc

Jan TX TTL Drive Components

-55°C to +85°C

DowKey Bracket

Electrical

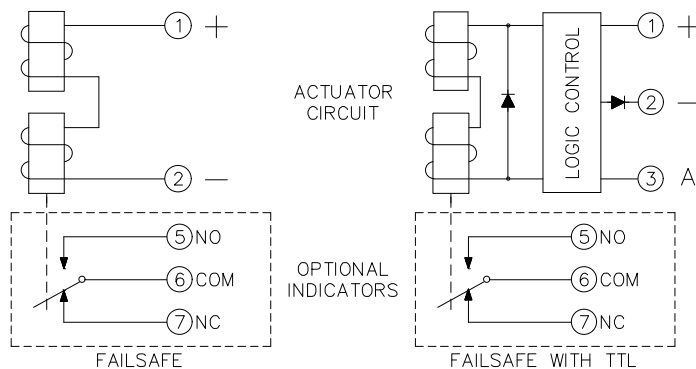

LOGIC TRUTH TABLE		
RF PATH	INDICATOR PATH	LOGIC INPUT "A"
J1-J3/J2-J4	NC-COM	0
J1-J2/J3-J4	NO-COM	1

"0" = 0.0V-0.8V
"1" = 2.4V-5.5V



**DowKey®
Microwave**
CORPORATION



DowKey® 411C Series Latching

Specifications :

Operating Voltage:

(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)

Coil Current (Nominal):

12 Vdc 300 mA
28 Vdc 127 mA

Switching Time:

20 mS maximum

Operating Temperature:

-25°C to +65°C

Mechanical Life, Cycles:

1 x 10⁶ minimum

Vibration, Operating:

10 G RMS, 20-2000 Hz

Mechanical Shock, Non-Operating:

50 G, 1/2 Sine, 11 mS

Nominal Weight:

4.0 oz., (115g.)

The DowKey Microwave 411 Series is a latching transfer switch for use in applications where high isolation, low VSWR, and low insertion loss are critical. The DowKey designed connector features a mechanically captivated center conductor which eliminates epoxy staking, and consequently, RF leakage. The 411 Series is available with pulse latching, and latching with self-cutoff actuators. Standard 411 Series latching switches are provided with four DC control terminals which allow the user to wire either a positive (+) or negative (-) common control line. On request, DowKey can provide a three terminal configuration with the common control line internally wired. All logic controlled models include an electronic self-cutoff circuit with suppression diodes.

Typical applications for the 411 Series include:

- Switch Matrixes
- Standby Transmitters with Dummy Load
- Alternate Antenna Select


RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
0-1	1.10	85	0.10	200
1-4	1.20	80	0.20	100
4-8	1.30	70	0.30	50
8-12	1.40	65	0.40	35
12-18	1.50	60	0.50	25

Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Standard	with Mechanical Indicators
Pulse Latching			
12 Vdc	SMA	411C-3208	411C-320832
28 Vdc	SMA	411C-3308	411C-330832
Latching with Self Cut-Off			
12 Vdc	SMA	411C-4208	411C-420832
28 Vdc	SMA	411C-4308	411C-430832
Latching with Self Cut-Off, TTL Compatible			
12 Vdc	SMA	411C-420802A	411C-420832A
28 Vdc	SMA	411C-430802A	411C-430832A

Mechanical

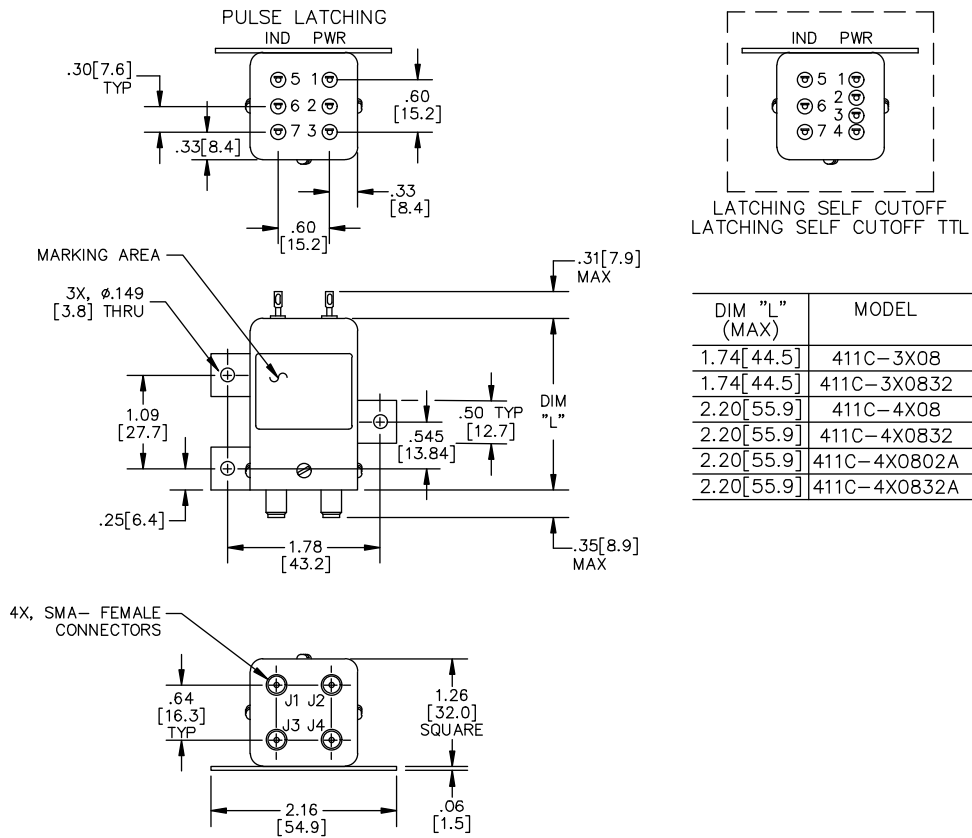

DIM "L" (MAX)	MODEL
1.74 [44.5]	411C-3X08
1.74 [44.5]	411C-3X0832
2.20 [55.9]	411C-4X08
2.20 [55.9]	411C-4X0832
2.20 [55.9]	411C-4X0802A
2.20 [55.9]	411C-4X0832A

Available Options

BYPASS (2-4)

BYPASS (1-3)

BYPASS (1-2)

BYPASS (3-4)

Reverse Polarity

9 PIN "D" Plug



Operating Voltages:
15, 20, 24 Vdc

Jan TX TTL Drive Components

-55°C to +85°C

DowKey Bracket

Electrical

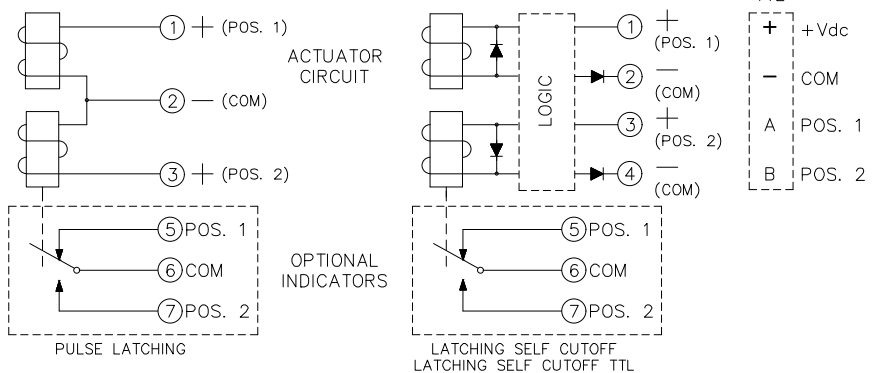

LOGIC TRUTH TABLE			
RF PATH	INDICATOR PATH	LOGIC INPUT "A"	LOGIC INPUT "B"
J1-J3/J2-J4	COM-1	1	0
J1-J2/J3-J4	COM-2	0	1

"0" = 0.0V-0.8V
"1" = 2.4V-5.5V



**DowKey®
Microwave**
CORPORATION



**DowKey® 412 Series
Failsafe**

Specifications :

Operating Voltage:

(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)

Coil Current (Nominal):

12 Vdc 300 mA
28 Vdc 175 mA

Switching Time:

20 mS maximum

Operating Temperature:

-25°C to +65°C

Mechanical Life, Cycles:

1 x 10⁶ minimum

Vibration, Operating:

10 G RMS, 20-2000 Hz

Mechanical Shock, Non-Operating:

30 G, 1/2 Sine, 11 mS

Nominal Weight:

14 oz., (397g.)

The DowKey Microwave 412 Series switches are designed for high performance, high power applications in microwave systems to 12.4 GHz. The RF path is optimized for Type "N" connectors. The DowKey designed connector features a mechanically captivated center conductor. This eliminates epoxy staking, and consequently, RF leakage. All logic controlled models include an electronic self-cutoff circuit.

Typical applications for the 412 Series include:

- Switch Matrixes
- Standby Transmitters with Dummy Load
- Alternate Antenna Select


RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
0-1	1.15	85	0.15	1000
1-2	1.20	80	0.20	350
2-4	1.25	70	0.25	250
4-8	1.35	65	0.35	150
8-12.4	1.50	60	0.50	120

Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Standard	with Mechanical Indicators
12 Vdc	N	412-2201	412-220132
28 Vdc	N	412-2301	412-230132
TTL Compatible Logic			
12 Vdc	N	412-220102A	412-220132A
28 Vdc	N	412-230102A	412-230132A



Mechanical

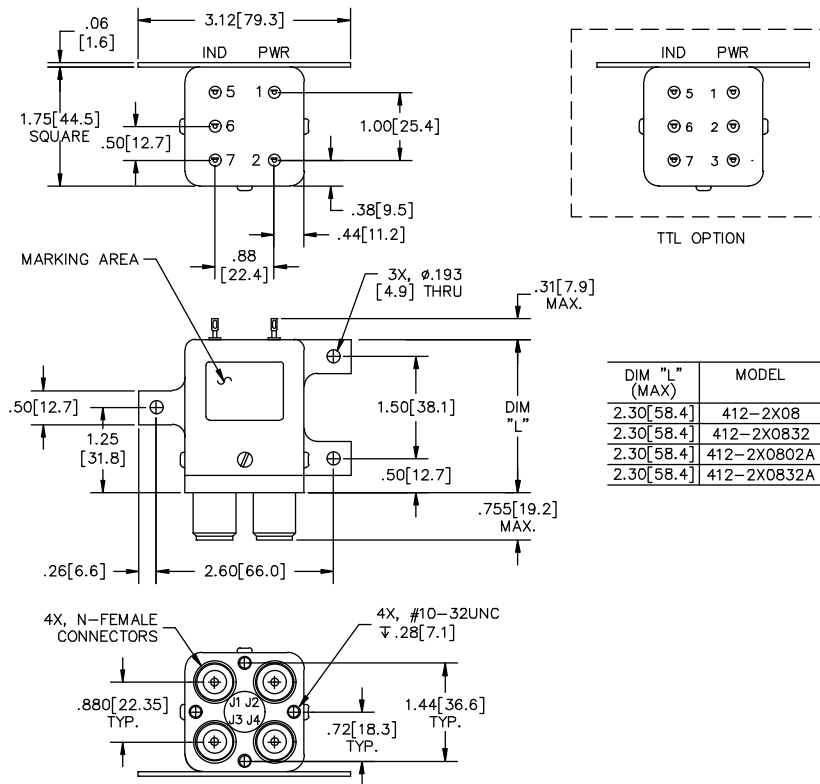

Available Options

- Immersion Seal
- Operating Voltages: 15, 20, 24 Vdc
- Jan TX TTL Drive Components
- 55°C to +85°C Operation
- BNC, TNC Connectors (Consult factory for RF characteristics)
- DowKey Bracket

Electrical

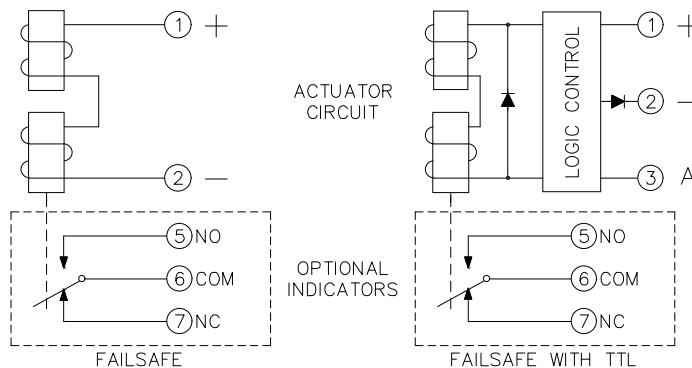

LOGIC TRUTH TABLE		
RF PATH	INDICATOR PATH	LOGIC INPUT "A"
J1-J3/J2-J4	NC-COM	0
J1-J2/J3-J4	NO-COM	1

"0" = 0.0V-0.8V
 "1" = 2.4V-5.5V



**DowKey®
Microwave**
CORPORATION

The DowKey Microwave 412 Series switches are designed for high performance, high power applications in microwave systems to 12.4 GHz. The RF path is optimized for Type "N" connectors. The DowKey designed connector features a mechanically captivated center conductor. This eliminates epoxy staking, and consequently, RF leakage. The switch is available with or without a mounting bracket.



DowKey® 412 Series Latching

Specifications :

Operating Voltage:

(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)

Coil Current (Nominal):

12 Vdc 300 mA
28 Vdc 175 mA

Switching Time:

20 mS maximum

Operating Temperature:

-25°C to +65°C

Mechanical Life, Cycles:

1 x 10⁶ minimum

Vibration, Operating:

10 G RMS, 20-2000 Hz

Mechanical Shock, Non-Operating:

30 G, 1/2 Sine, 11 mS

Nominal Weight:

14 oz., (397g.)

Typical applications for the 412 Series include:

- Switch Matrixes
- Standby Transmitters with Dummy Load
- Alternate Antenna Select


RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
0-1	1.15	85	0.15	1000
1-2	1.20	80	0.20	350
2-4	1.25	70	0.25	250
4-8	1.35	65	0.35	150
8-12.4	1.50	60	0.50	120

Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Standard	with Mechanical Indicators
Pulse Latch			
12 Vdc	N	412-3201	412-320132
28 Vdc	N	412-3301	412-330132
Latching with Self Cut-Off			
12 Vdc	N	412-4201	412-420132
28 Vdc	N	412-4301	412-430132
Latching with Self Cut-Off, TTL Compatible			
12 Vdc	N	412-420102A	412-420132A
28 Vdc	N	412-430102A	412-430132A

Mechanical

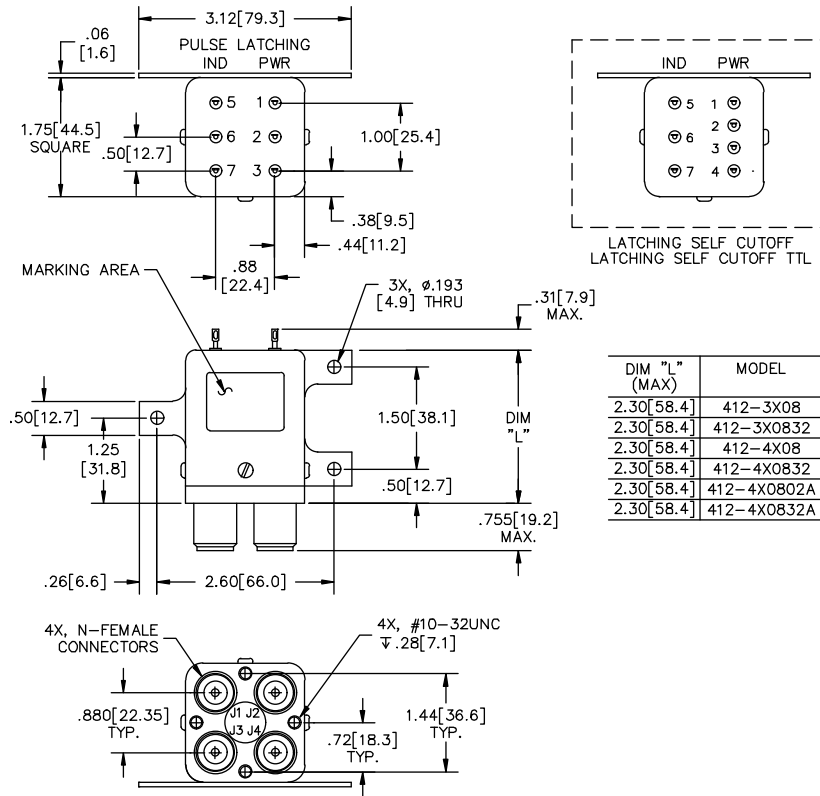

Available Options

Immersion Seal

Operating Voltages:
15, 20, 24 Vdc


Jan TX TTL Drive Components

-55°C to +85°C Operation

BNC, TNC Connectors
(Consult factory for RF characteristics)

DowKey Bracket

Electrical

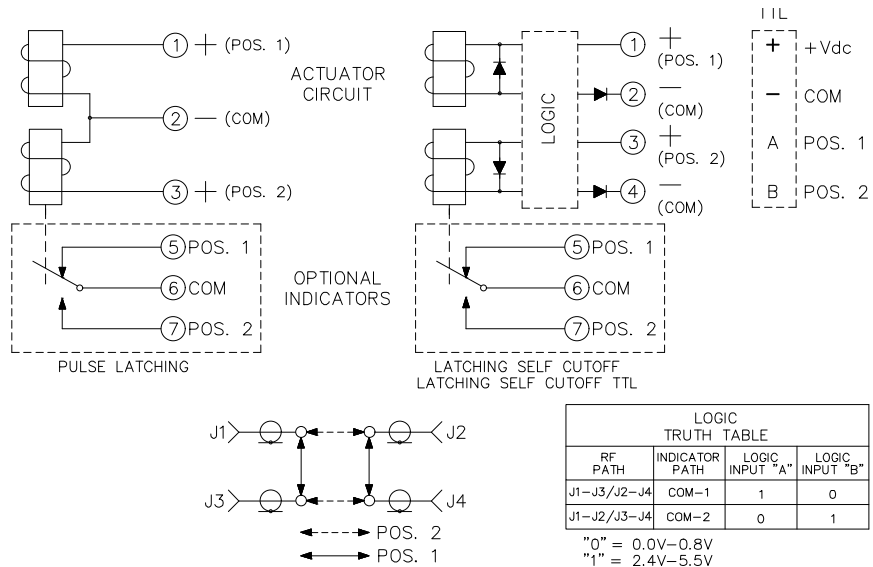



**DowKey®
Microwave**
CORPORATION



**DowKey® 509 Series
Failsafe**

Specifications :

Operating Voltage:

(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)

Coil Current (Nominal):

12 Vdc 83 mA
28 Vdc 37 mA

Switching Time:

15 mS maximum

Operating Temperature:

-25°C to +65°C

Mechanical Life, Cycles:

1 x 10⁶ minimum

Vibration:

10 G RMS, 20-2000 Hz

Mechanical Shock:

30 G, 1/2 Sine, 11 mS

Nominal Weight:

0.5 oz., (14.2g.)

The DowKey Microwave 509 Series SP2T Failsafe switch is a micro-miniature, PC board mount SPDT coaxial switch. The switch was designed specifically for applications where small size, reduced weight, and less power consumption are required. Overall size is only 0.75"x0.75"x0.25" and the weight is 0.5 ounce. The actuator consumes less than one watt which is 30% less power than similar designs.

The RF characteristics are excellent over the DC-12.4 GHz frequency range. Because the 509 is hermetically laser sealed after being vacuum baked and backfilled with an inert gas, it is able to satisfy hot switching requirements. The 509 has been subjected to 50 Watts (CW) hot switching at 1GHZ and had minimal RF degradation after one million cycles.

Typical applications for the 509 Series include:

- Microwave Radio
- EW and Missile Systems
- Repeater Stations


RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
DC-1	1.25	60	0.35	50
1-8	1.30	50	0.40	30
8-12.4	1.45	50	0.45	10

Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Standard
12 Vdc	PIN	509-2219
28 Vdc	PIN	509-2319

Mechanical

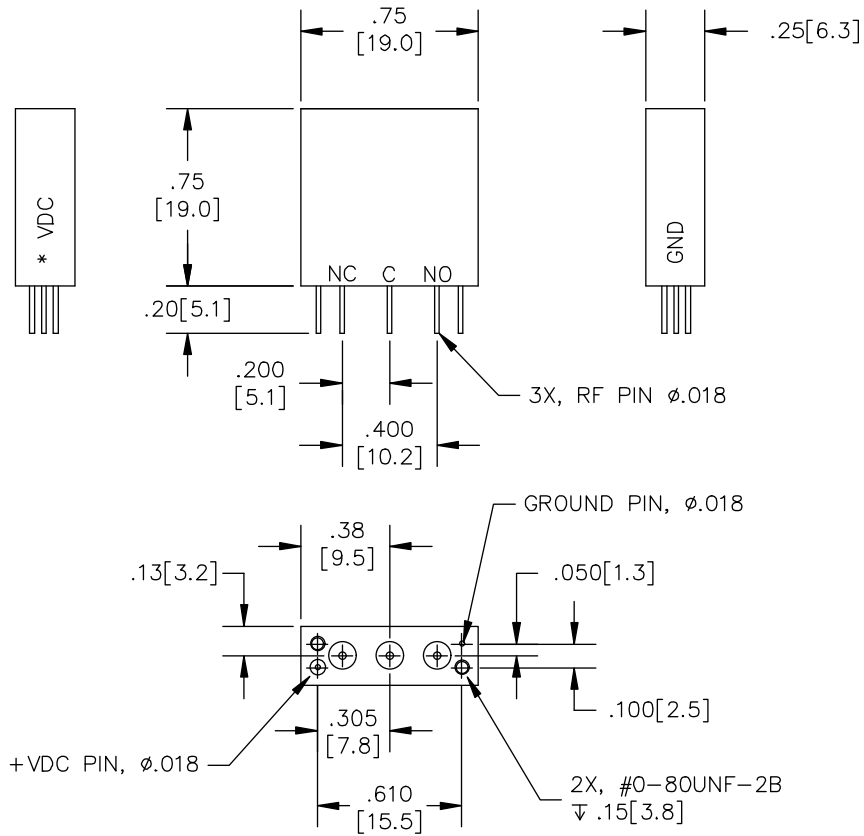


Available Options

Operating Voltages:
15, 20, 24 Vdc

-55°C to +85°C Operation

Electrical

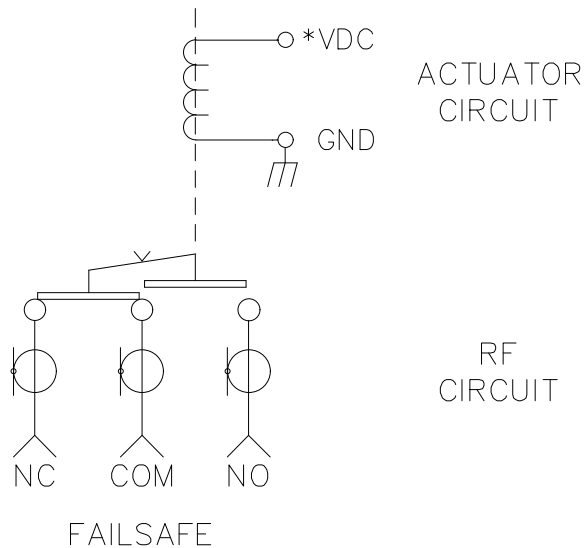



**DowKey®
Microwave**
CORPORATION



DowKey® 521 Series Failsafe

Specifications :

Operating Voltage:

(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)

Coil Current (Nominal):

12 Vdc 680 mA
28 Vdc 294 mA

Switching Time:

20 mS maximum

Operating Temperature:

-25°C to +65°C

Mechanical Life, Cycles:

1 x 10⁶ minimum

Vibration, Operating:

10 G RMS, 20-2000 Hz

Mechanical Shock, Non-Operating:

50 G, 1/2 Sine, 11 mS

Nominal Weight:

3.0 oz., (85g.)

The DowKey Microwave 521 Series 2P3T switches offer exceptional isolation and low insertion loss. These characteristics offer unique advantages for switch matrix and critical test applications. The 521 features dual balanced actuators to achieve five port signal transfer, or create an SPDT switch in which the unused RF input is internally connected to a 2 Watt 50 Ohm termination.

Due to the small size of these switches, only the SMA connectors are available.

Typical applications for the 521 Series include:

- Automatic Test Equipment
- Compact Switch Matrixes
- VXI Switch Cards

RF Characteristics





Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
0-4	1.20	70	0.20	100
4-8	1.30	65	0.30	70
8-12	1.40	60	0.40	60
12-18	1.50	60	0.50	45

Power handling capability is for through path only. Optional internal termination is limited to 500 milliwatts dissipation.

Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Standard	with Mechanical Indicators
12 Vdc	SMA	521-220803	521-220833
28 Vdc	SMA	521-230803	521-230833
TTL Compatible Logic			
12 Vdc	SMA	521-220803A	521-220833A
28 Vdc	SMA	521-230803A	521-230833A

Mechanical

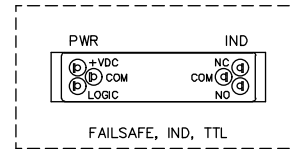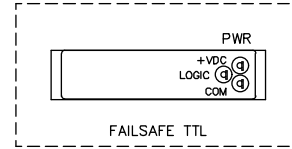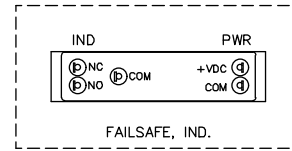
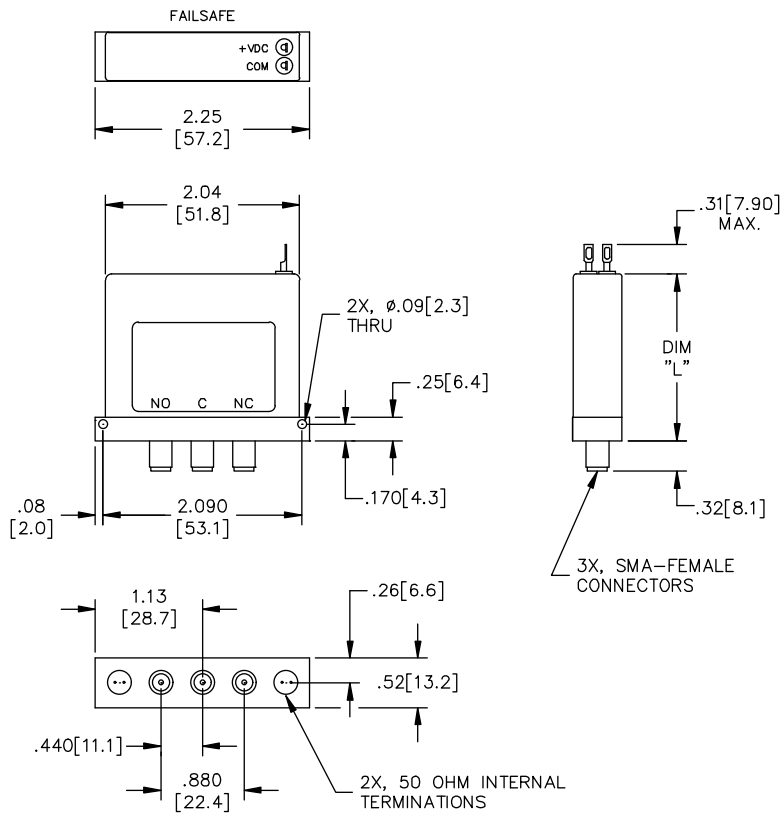


DIM "L" (MAX)	MODEL
1.28 [35.5]	521-2X08
1.53 [38.9]	521-2X0832
1.70 [43.2]	521-2X0802A
1.70 [43.2]	521-2X0832A

Available Options

- Immersion Seal
- 9 PIN "D" Plug
- Operating Voltages:
15, 20, 24 Vdc
- 55°C to +85°C Operation
- 5W, 10W Internal Terminations
- 2W External Terminations
- Unterminated (5 port)

Electrical

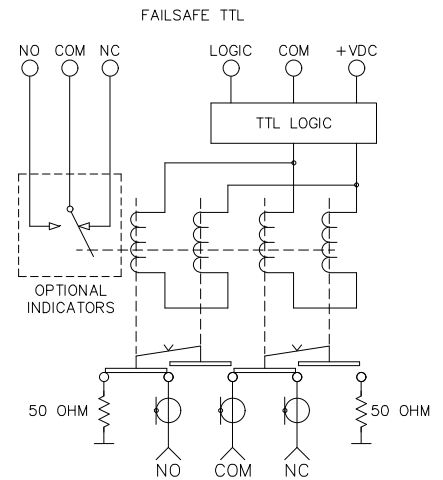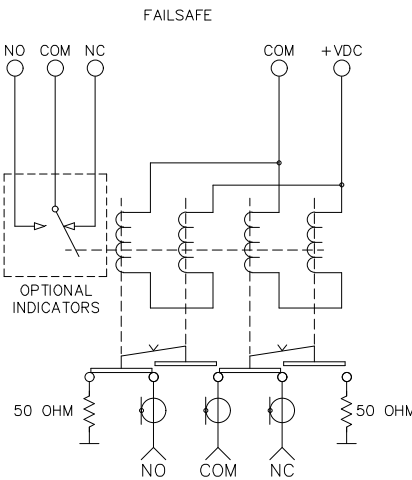



**DowKey®
Microwave**
CORPORATION



DowKey® 521 Series Latching

Specifications :

Operating Voltage:

(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)

Coil Current (Nominal):

12 Vdc 440 mA
28 Vdc 190 mA

Switching Time:

20 mS maximum

Operating Temperature:

-25°C to +65°C

Mechanical Life, Cycles:

1 x 10⁶ minimum

Vibration, Operating:

10 G RMS, 20-2000 Hz

Mechanical Shock, Non-Operating:

50 G, 1/2 Sine 11 mS

Nominal Weight:

5.0 oz., (142g.)

The DowKey Microwave 521 Series 2P3T switches have exceptional isolation and low insertion loss. These characteristics offer unique advantages for switch matrix and critical test applications. The 521 features dual balanced actuators to achieve five port signal transfer, or create an SPDT switch in which the unused RF input is internally connected to a 2 Watt 50 Ohm termination.

Due to the small size of these switches, only the SMA connectors are available. Latching switches with logic include an electronic self-cutoff circuit and coil suppression diodes.

Typical applications for the 521 Series include:

- Automatic Test Equipment
- Compact Switch Matrixes
- VXI Switch Cards

RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
0-4	1.20	70	0.20	100
4-8	1.30	65	0.30	70
8-12	1.40	60	0.40	60
12-18	1.50	60	0.50	45

Power handling capability is for through path only. Optional internal termination is limited to 500 milliwatts dissipation.





Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Standard	with Mechanical Indicators
12 Vdc	SMA	521-420803	521-420833
28 Vdc	SMA	521-430803	521-430833

Latching Self Cutoff, TTL compatible logic

12 Vdc	SMA	521-420803A	521-420833A
28 Vdc	SMA	521-430803A	521-430833A

Mechanical

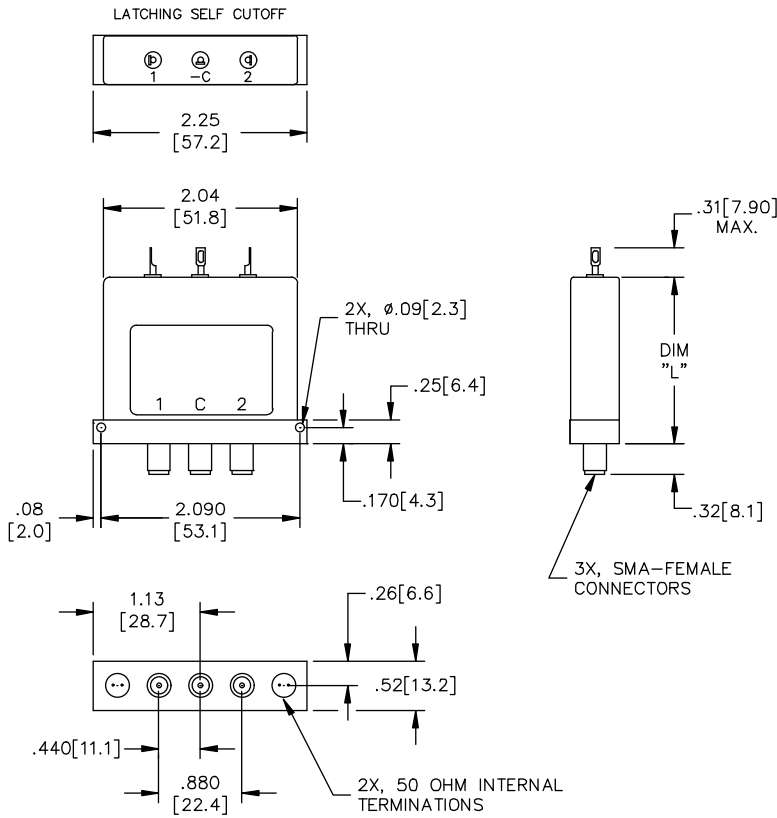


DIM "L" (MAX)	MODEL
1.68 [42.7]	521-4X08
1.78 [45.2]	521-4X0832
1.78 [45.2]	521-4X0802A
1.78 [45.2]	521-4X0832A

Available Options

- Immersion Seal
- 9 PIN "D" Plug
- Operating Voltages:
15, 20, 24 Vdc
- 55°C to +85°C Operation
- 5W, 10W Internal Terminations
- 2W External Terminations
- Unterminated (5 port)
- Reverse Polarity

Electrical

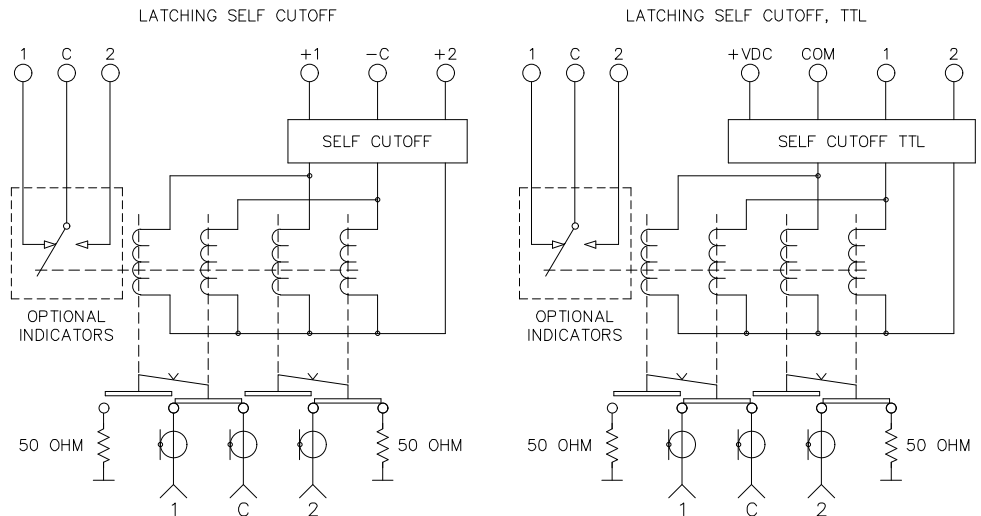



**DowKey®
Microwave**
CORPORATION



**DowKey® 531-561 Series
Normally Open Terminated,
SMA**

Specifications :

- Operating Voltage:**
(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)
- Coil Current (Nominal):**
12 Vdc 324 mA
28 Vdc 140 mA
- Switching Time:**
15 mS maximum
- Operating Temperature:**
-25°C to +65°C
- Mechanical Life, Cycles:**
1 x 10⁶ minimum
- Nominal Weight:**
11.0 oz., (312g.)

The DowKey Microwave 3 to 6 Position Normally Open switch is a multi-position electro-mechanical coaxial switch with SMA connectors. The RF characteristics are excellent over the DC-18 GHz frequency range.

Options include extended frequency range up to 26.5 GHz, a "D" type control connector, moisture seal, indicator contacts, suppressions diodes, special operating voltages, and TTL or BCD compatibility. Also available are BMA (Blind Mate) connectors which provide quick installation into modular plug-in systems operating to 18 GHz. The BMA connectors mate with OSP* female connectors.

*OSP is a registered trademark of M/A COM Omni-Spectra, Inc.

Typical applications for the 531-561 Series include:

- Automatic Test Equipment
- Switch Matrixes
- Multi-Band or Alternate Source Selection



RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
DC-4	1.25	70	0.20	100
4-8	1.35	65	0.30	70
8-12	1.40	60	0.40	60
12-16	1.50	60	0.50	50
16-18	1.60	60	0.50	45


Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Switch Configuration		
		SP3T	SP4T	SP6T
12 Vdc	SMA	531-520803	541-520803	561-520803
28 Vdc	SMA	531-530803	541-530803	561-530803
Normally open with indicators				
12 Vdc	SMA	531-520823	541-520823	561-520823
28 Vdc	SMA	531-530823	541-530823	561-530823
Normally open with TTL Compatible Logic				
12 Vdc	SMA	531-520803A	541-520803A	561-520803A
28 Vdc	SMA	531-530803A	541-530803A	561-530803A
Normally open with Indicators, TTL Compatible Logic				
12 Vdc	SMA	531-520823A	541-520823A	561-520823A
28 Vdc	SMA	531-530823A	541-530823A	561-530823A

Mechanical

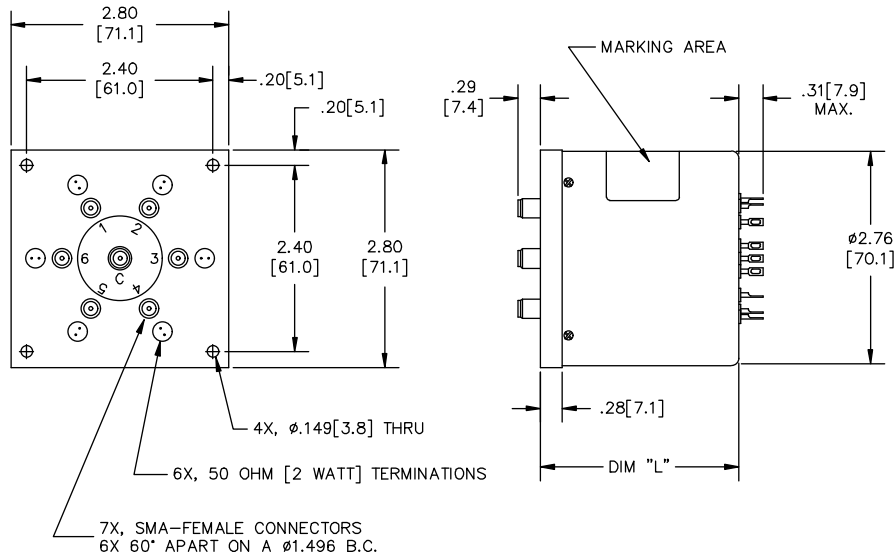

3 POSITION



4 POSITION

DIM "L" (MAX)	MODEL
1.95 [49.5]	5X1-5X0803
2.29 [58.2]	5X1-5X0823
2.29 [58.2]	5X1-5X0803A
2.58 [65.5]	5X1-5X0823A

Available Options

Moisture Seal

9 or 15 PIN "D" Plug

BCD Decoding Circuit



Operating Voltages:
15, 20, 24 Vdc

-55°C to +85°C Operation

Normally Closed, Position 1

BMA Connectors

Electrical

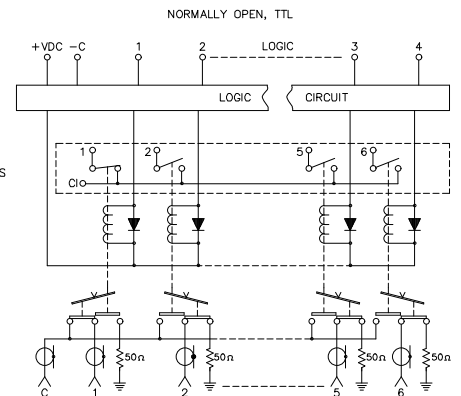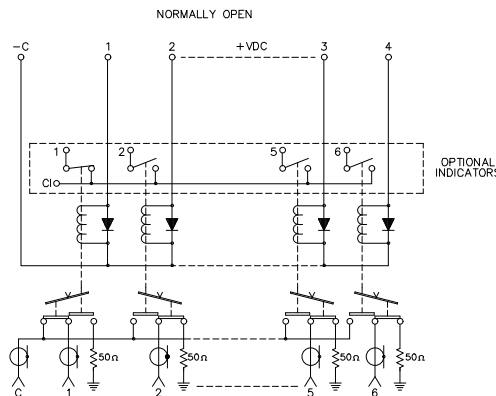



**DowKey®
Microwave**
CORPORATION



**DowKey® 531-561 Series
Latching, SMA**

Specifications :

- Operating Voltage:**
(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)
- Coil Current (Nominal):**
12 Vdc 414 mA
28 Vdc 177 mA
- Switching Time:**
15 mS maximum
- Operating Temperature:**
-25°C to +65°C
- Mechanical Life, Cycles:**
1 x 10⁶ minimum
- Nominal Weight:**
9.5 oz., (269 g.)

DowKey's Microwave 3 to 6 Position Latching switch is a multi-position electro-mechanical latching coaxial switch with suppression diodes and a solid state self cut-off circuit. Utilizing SMA connectors, the RF characteristics are excellent over the DC-18 GHz frequency range.

Options include extended frequency range up to 26.5 GHz, a "D" type control connector, moisture seal, indicator contacts, operating voltages, and TTL or BCD compatibility. Also available are BMA (Blind Mate) connectors which provide quick installation into modular plug-in systems operating to 18 GHz. The BMA connectors mate with OSP* female connectors.

*OSP is a registered trademark of M/A COM Omni-Spectra, Inc.

Typical applications for the 531-561 Series include:

- Automatic Test Equipment
- Switch Matrixes
- Multi-Band or Alternate Source Selection



RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
DC-4	1.25	70	0.20	100
4-8	1.35	65	0.30	70
8-12	1.40	60	0.40	60
12-16	1.50	60	0.50	50
16-18	1.60	60	0.50	45


Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Switch Configuration		
		SP3T	SP4T	SP6T
Latching with Self Cut-Off				
12 Vdc	SMA	531-4208	541-4208	561-4208
28 Vdc	SMA	531-4308	541-4308	561-4308
Latching with Self Cut-Off, Indicators				
12 Vdc	SMA	531-420822	541-420822	561-420822
28 Vdc	SMA	531-430822	541-430822	561-430822
Latching with Self Cut-Off, TTL Compatible Logic				
12 Vdc	SMA	531-420802A	541-420802A	561-420802A
28 Vdc	SMA	531-430802A	541-430802A	561-430802A
Latching with Self Cut-Off, Indicators, TTL Compatible Logic				
12 Vdc	SMA	531-420822A	541-420822A	561-420822A
28 Vdc	SMA	531-430822A	541-430822A	561-430822A

Mechanical

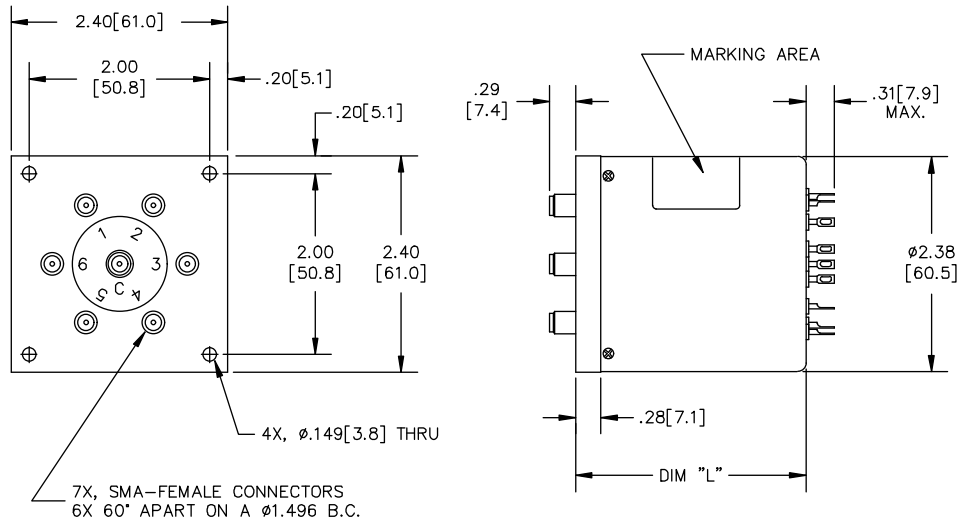

3 POSITION



4 POSITION

DIM "L" (MAX)	MODEL
2.40 [61.0]	5X1-4X08
2.70 [68.6]	5X1-4X0822
2.70 [68.6]	5X1-4X0802A
3.00 [76.2]	5X1-4X0822A

Available Options

Moisture Seal

9 or 15 PIN "D" Plug

BCD Decoding Circuit


Operating Voltages:
15, 20, 24 Vdc

-55°C to +85°C Operation

Common Negative

BMA Connectors

Electrical

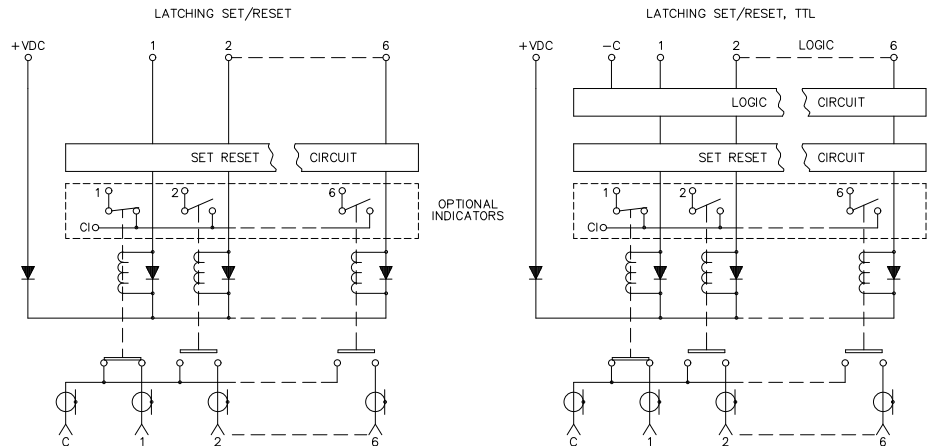



**DowKey®
Microwave**
CORPORATION



DowKey® 531-561 Series Latching Terminated, SMA

Specifications :

Operating Voltage:
(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)

Coil Current (Nominal):
12 Vdc 414 mA
28 Vdc 177 mA

Switching Time:
15 mS maximum

Operating Temperature:
-25°C to +65°C

Mechanical Life, Cycles:
1 x 10⁶ minimum

Nominal Weight:
10.0 oz, (283 g)

The DowKey Microwave 3 to 6 Position Latching Terminated switch is a multi-position electro-mechanical latching coaxial switch with suppression diodes, a solid state self cut-off circuit, and 2 Watt, 50 Ohm internal terminations.. Utilizing SMA connectors, the RF characteristics are excellent over the DC-18 GHz frequency range.

Options include 5 Watt terminations, a "D" type control connector, moisture seal, indicator contacts, special operating voltages, and TTL or BCD compatibility. Also available are BMA (Blind Mate) connectors which provide quick installation into modular plug-in systems operating to 18 GHz. The BMA connectors mate with OSP* female connectors.

*OSP is a registered trademark of M/A COM Omni-Spectra, Inc.

Typical applications for the 531-561 Series include:

- Automatic Test Equipment
- Switch Matrixes
- Multi-Band or Alternate Source Selection

RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
DC-4	1.25	70	0.20	100
4-8	1.35	65	0.30	70
8-12	1.40	60	0.40	60
12-16	1.50	60	0.50	50
16-18	1.60	60	0.50	45

Power handling capability is for through path only. Internal termination is limited to 500 milliwatts dissipation.

Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Switch Configuration		
		SP3T	SP4T	SP6T
12 Vdc	SMA	531-420803	541-420803	561-420803
28 Vdc	SMA	531-430803	541-430803	561-430803

Latching with Self Cut-Off, Indicators

12 Vdc	SMA	531-420823	541-420823	561-420823
28 Vdc	SMA	531-430823	541-430823	561-430823



Latching with Self Cut-Off, TTL Compatible Logic

12 Vdc	SMA	531-420803A	541-420803A	561-420803A
28 Vdc	SMA	531-430803A	541-430803A	561-430803A


Latching with Self Cut-Off, Indicators, TTL Compatible Logic

12 Vdc	SMA	531-420823A	541-420823A	561-420823A
28 Vdc	SMA	531-430823A	541-430823A	561-430823A

Mechanical

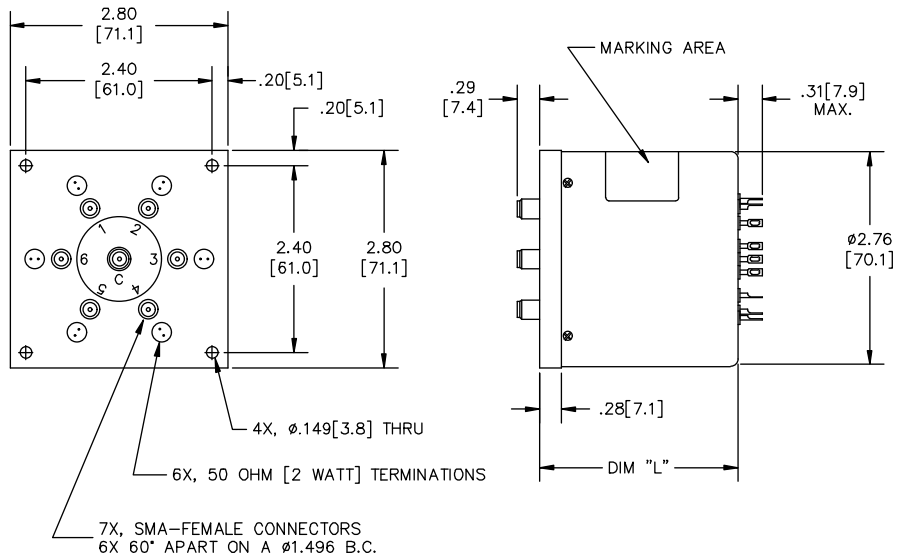

3 POSITION



4 POSITION

DIM "L" (MAX)	MODEL
2.40 [61.0]	5X1-4X0803
2.70 [68.6]	5X1-4X0823
2.70 [68.6]	5X1-4X0803A
3.00 [76.2]	5X1-4X0823A

Available Options

Moisture Seal

9 or 15 PIN "D" Plug


BCD Decoding Circuit

Operating Voltages:
15, 20, 24 Vdc

-55°C to +85°C Operation


BMA Connectors

Electrical

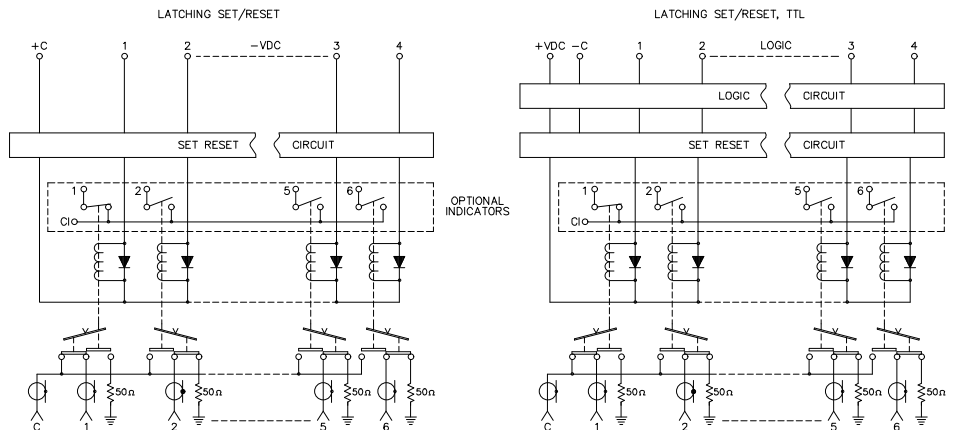



**DowKey®
Microwave**
CORPORATION

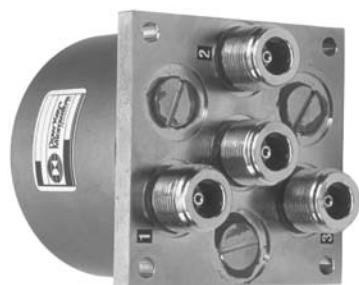

DowKey® 531-561 Series Normally Open, N

Specifications :

Operating Voltage:

(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)

Coil Current (Nominal):

12 Vdc 100 mA
28 Vdc 56 mA

Switching Time:

20 mS maximum

Operating Temperature:

-25°C to +65°C

Mechanical Life, Cycles:

1 x 10⁶ minimum

Nominal Weight:

17.0 oz., (482g.)

The DowKey Microwave 3 to 6 Position Normally Open switch is a multi-position electro-mechanical coaxial switch. The RF characteristics are excellent over the DC-12.4 GHz frequency range. Available connectors include "N" and "TNC". "BNC" connectors are also available but are not recommended for use above 1 GHz.

Options include "D" type control connector, moisture seal, indicator contacts, suppression diodes, special operating voltages, and TTL or BCD compatibility.

Typical applications for the 531-561 Series include:

- Automatic Test Equipment
- Switch Matrixes
- Multi-Band or Alternate Source Selection



RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
DC-4	1.25	70	0.30	175
4-8	1.35	60	0.40	125
8-12.4	1.50	60	0.40	100


Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Switch Configuration		
		SP3T	SP4T	SP6T
12 Vdc	N	531-5201	541-5201	561-5201
28 Vdc	N	531-5301	541-5301	561-5301
Normally open with Indicators				
12 Vdc	N	531-520122	541-520122	561-520122
28 Vdc	N	531-530122	541-530122	561-530122
Normally open with TTL Compatible Logic				
12 Vdc	N	531-520102A	541-520102A	561-520102A
28 Vdc	N	531-530102A	541-530102A	561-530102A
Normally open with Indicators, TTL Compatible Logic				
12 Vdc	N	531-520122A	541-520122A	561-520122A
28 Vdc	N	531-530122A	541-530122A	561-530122A

Mechanical

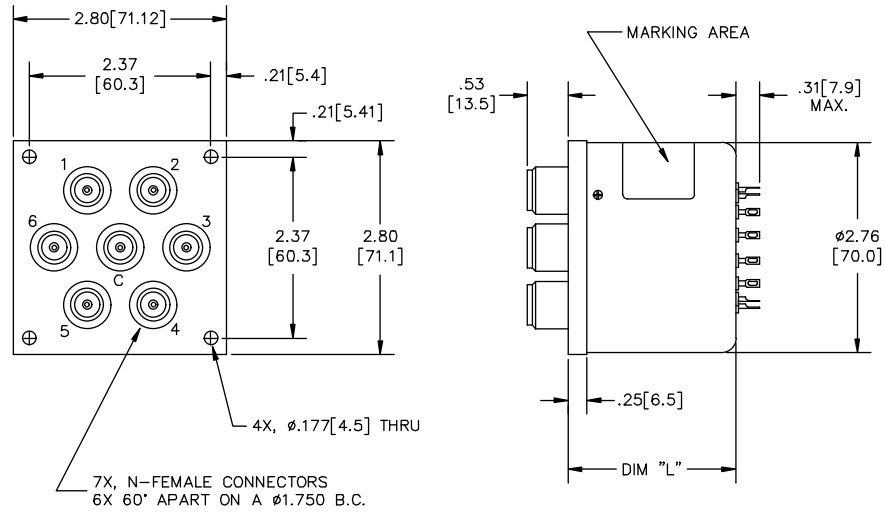

3 POSITION



4 POSITION

DIM "L" (MAX)	MODEL
2.20 [55.9]	5X1-5X01
2.62 [66.5]	5X1-5X0122
2.57 [65.3]	5X1-5X0102A
2.90 [73.7]	5X1-5X0122A

Available Options

Moisture Seal

9 or 15 PIN "D" Plug

Operating Voltages:
15, 20, 24 Vdc


-55°C to +85°C Operation

BCD Decoding Circuit

BNC, TNC Connectors
(Consult factory for
RF characteristics)

High Power
(Consult factory for
RF power rating)

Electrical

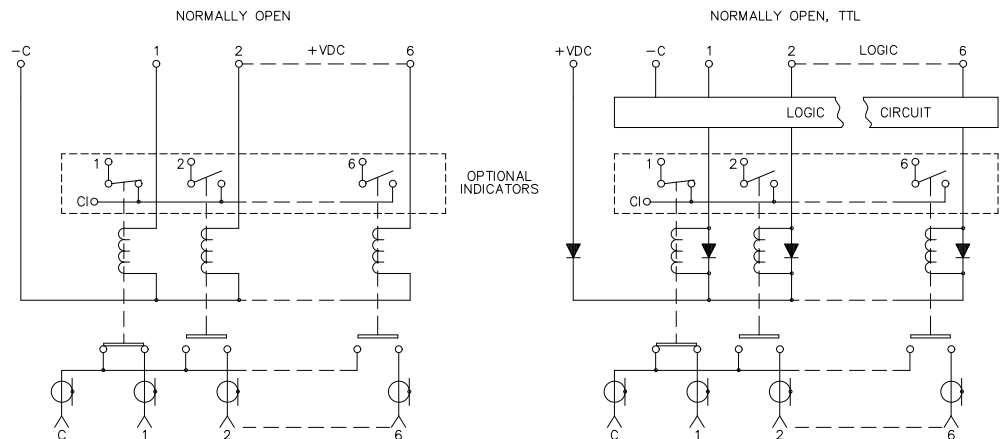



DowKey®
Microwave
CORPORATION



DowKey® 531-561 Series
Latching, N

Specifications :

- Operating Voltage:**
(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)
- Coil Current (Nominal):**
12 Vdc 521 mA
28 Vdc 224 mA
- Switching Time:**
20 mS maximum
- Operating Temperature:**
-25°C to +65°C
- Mechanical Life, Cycles:**
1 x 10⁶ minimum
- Nominal Weight:**
22.0 oz., (624g.)

DowKey's Microwave 3 to 6 Position Latching switch is a multi-position electro-mechanical coaxial switch with suppression diodes and a solid state self cut-off circuit. Utilizing "N" and "TNC" connectors, the RF characteristics are excellent over the DC-12.4 GHz frequency range. "BNC" connectors are also available but are not recommended for use above 1 GHz.

Options include "D" type control connector, moisture seal, indicator contacts, special operating voltages, and TTL or BCD compatibility.

Typical applications for the 531-561 Series include:

- Automatic Test Equipment
- Switch Matrixes
- Multi-Band or Alternate Source Selection



RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
DC-4	1.25	70	0.30	175
4-8	1.35	60	0.40	125
8-12.4	1.50	60	0.50	100


Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Switch Configuration		
		SP3T	SP4T	SP6T
12 Vdc	N	531-4201	541-4201	561-4201
28 Vdc	N	531-4301	541-4301	561-4301
Latching with Self Cut-Off, Indicators				
12 Vdc	N	531-420122	541-420122	561-420122
28 Vdc	N	531-430122	541-430122	561-430122
Latching with Self Cut-Off, TTL Compatible Logic				
12 Vdc	N	531-420102A	541-420102A	561-420102A
28 Vdc	N	531-430102A	541-430102A	561-430102A
Latching with Self Cut-Off, Indicators, TTL Compatible Logic				
12 Vdc	N	531-420122A	541-420122A	561-420122A
28 Vdc	N	531-430122A	541-430122A	561-430122A

Mechanical

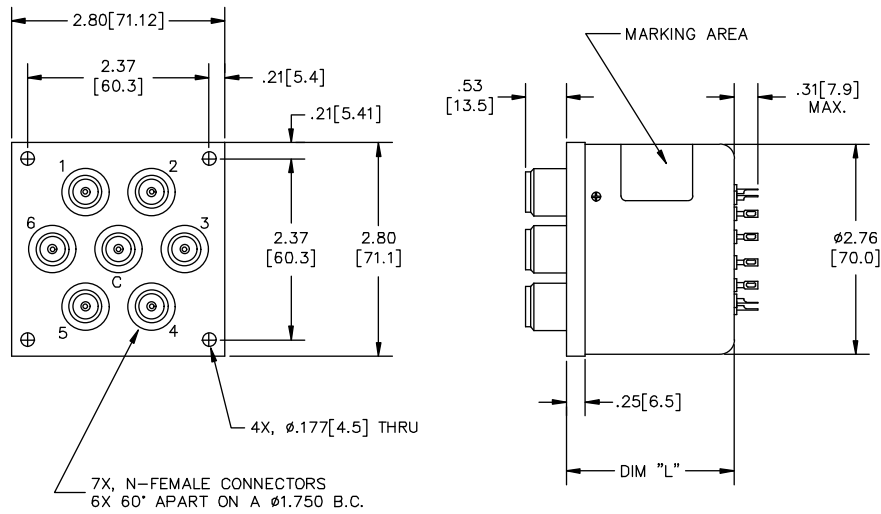

3 POSITION



4 POSITION

DIM "L" (MAX)	MODEL
2.20 [55.9]	5X1-4X01
2.60 [66.0]	5X1-4X0122
2.72 [69.1]	5X1-4X0102A
2.91 [73.9]	5X1-4X0122A

Available Options

Moisture Seal

9 or 15 PIN "D" Plug

Operating Voltages:
15, 20, 24 Vdc

-55°C to +85°C Operation


BCD Decoding Circuit

Common Negative

BNC, TNC Connectors
(Consult factory for
RF characteristics)

High Power
(Consult factory for
RF power rating)

Electrical

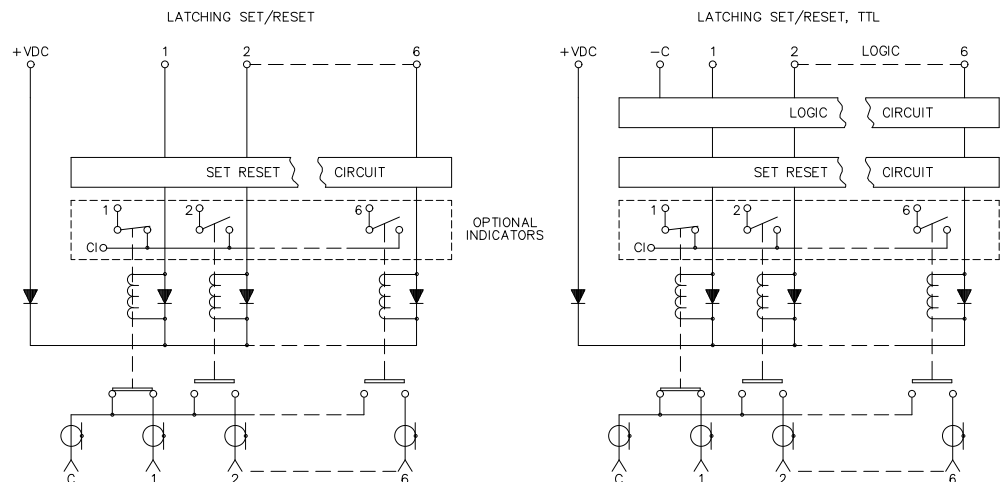



**DowKey®
Microwave**
CORPORATION



The DowKey Microwave 535-565 Series Multi-position switches are designed for superior performance in restricted area applications such as portable military test sets. The switches are the smallest multi-position switches available that conform to the mechanical dimensions of a MIL-PRF-3928/18 switch. All models have SMA connectors with mechanically captivated center conductors for minimal RF leakage and low signal loss. Three-, four-, and six-position models are standard.

Typical applications for the 535-565 Series include:

- Automatic Test Equipment
- Compact Switch Matrixes
- Multi-Band or Alternate Source Selection

**DowKey® 535-565 Series
Normally Open, SMA**

Specifications :

Operating Voltage:
(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)

Coil Current (Nominal):
12 Vdc 333 mA
28 Vdc 161 mA

Switching Time:
20 mS maximum

Operating Temperature:
-25°C to +65°C

Mechanical Life, Cycles:
1 x 10⁶ minimum

Nominal Weight:
4.0 oz., (115g.)

RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
DC-4	1.25	70	0.20	100
4-8	1.35	65	0.30	70
8-12	1.40	60	0.40	60
12-18	1.50	60	0.50	45

Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Switch Configuration		
		SP3T	SP4T	SP6T
12 Vdc	SMA	535-5208	545-5208	565-5208
28 Vdc	SMA	535-5308	545-5308	565-5308

Normally open with indicators

12 Vdc	SMA	535-520822	545-520822	565-520822
28 Vdc	SMA	535-530822	545-530822	565-530822



Normally open with TTL Compatible Logic

12 Vdc	SMA	535-520802A	545-520802A	565-520802A
28 Vdc	SMA	535-530802A	545-530802A	565-530802A


Normally open with indicators, TTL Compatible Logic

12 Vdc	SMA	535-520822A	545-520822A	565-520822A
28 Vdc	SMA	535-530822A	545-530822A	565-530822A

Mechanical

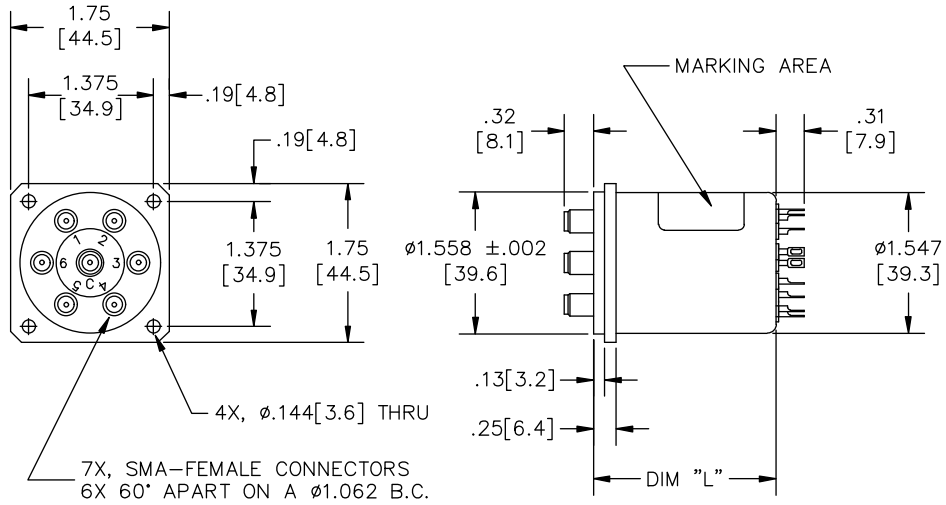

3 POSITION



4 POSITION

DIM "L" (MAX)	MODEL
1.41 [35.8]	5X5-5X08
1.90 [48.3]	5X5-5X0822
1.70 [43.2]	5X5-5X0802A
2.08 [52.8]	5X5-5X0822A

Available Options

Moisture Seal

9 PIN "D" Plug*


BCD Decoding Circuit

Operating Voltages:
15, 20, 24 Vdc

-55°C to +85°C Operation

*"D" Plug not available
with indicators

Electrical

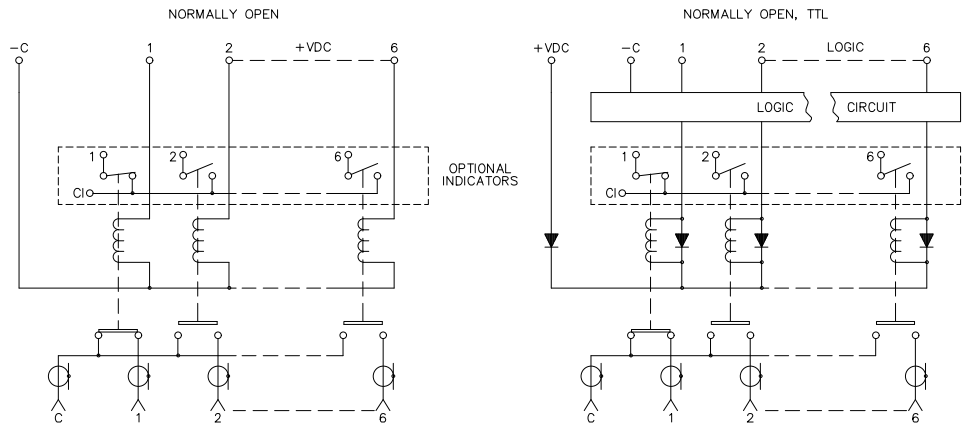



**DowKey®
Microwave**
CORPORATION



DowKey® 571-581 Series Normally Open, SMA

Specifications :

- Operating Voltage:**
(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)
- Coil Current (Nominal):**
12 Vdc 286 mA
28 Vdc 122 mA
- Switching Time:**
15 mS maximum
- Operating Temperature:**
-25°C to +65°C
- Mechanical Life, Cycles:**
1 x 10⁶ minimum
- Nominal Weight:**
5.0 oz., (142g)

The DowKey Microwave 7 to 8 Position Normally Open switch is a multi-position electro-mechanical coaxial switch with SMA connectors. The RF characteristics are excellent over the DC-18 GHz frequency range.

Options include "D" type control connector, moisture seal, indicator contacts, special operating voltages, suppression diodes, and TTL or BCD compatibility. Also available are BMA (Blind Mate) connectors which provide quick installation into modular plug-in systems. The BMA connectors mate with OSP* female connectors.

*OSP is a registered trademark of M/A COM Omni-Spectra, Inc.

Typical applications for the 571-581 Series include:

- Automatic Test Equipment
- Switch Matrixes
- Multi-Band or Alternate Source Selection

RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
DC-4	1.25	70	0.20	100
4-8	1.35	65	0.30	70
8-12	1.40	60	0.40	60
12-16	1.50	60	0.50	50
16-18	1.80	55	0.80	45

Power handling capability is for through path only. Internal termination is limited to 500 milliwatts dissipation.

Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Switch Configuration	
		SP7T	SP8T
12 Vdc	SMA	571-5208	581-5208
28 Vdc	SMA	571-5308	581-5308

Normally Open with Indicators

12 Vdc	SMA	571-520822	581-520822
28 Vdc	SMA	571-530822	581-530822




Normally Open with TTL Compatible Logic

12 Vdc	SMA	571-520802A	581-520802A
28 Vdc	SMA	571-530802A	581-530802A

Normally Open with Indicators, TTL Compatible Logic

12 Vdc	SMA	571-520822A	581-520822A
28 Vdc	SMA	571-530822A	581-530822A

Mechanical

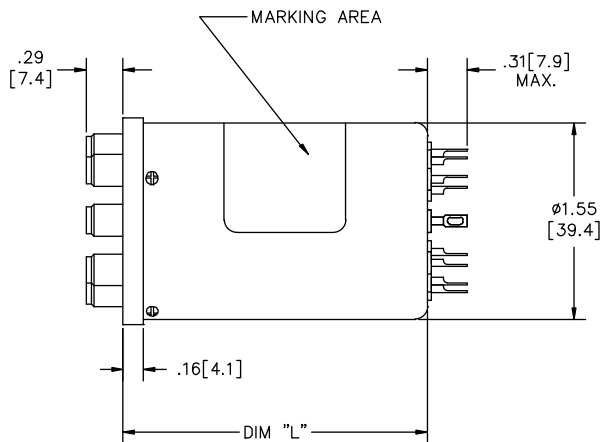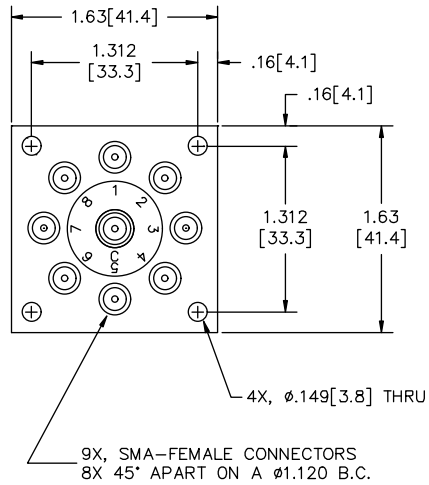

DIM "L" (MAX)	MODEL
1.95 [49.5]	5X1-5X08
2.29 [58.2]	5X1-5X0822
2.29 [58.2]	5X1-5X0802A
2.58 [65.5]	5X1-5X0822A

Available Options

Moisture Seal

9, 15 or 25 PIN "D" Plug


Operating Voltages:
15, 20, 24 Vdc

-55°C to +85°C Operation

BCD Decoding Circuit

BMA Connectors

Electrical

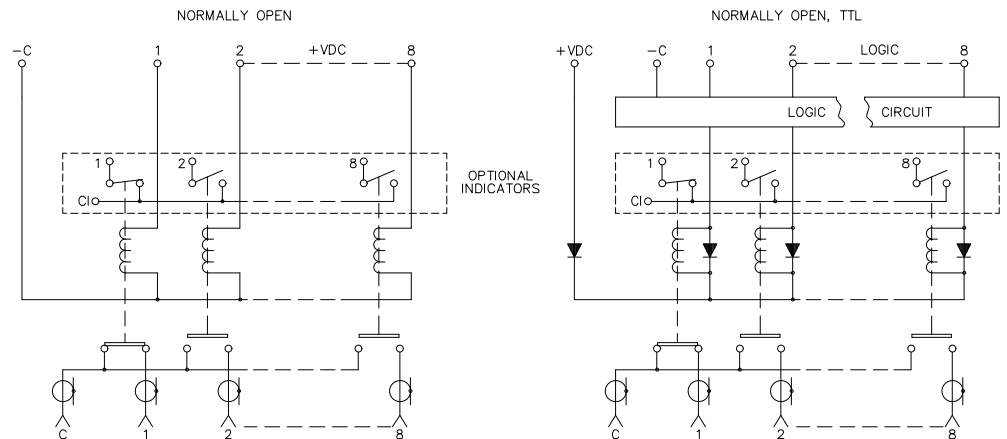



**DowKey®
Microwave**
CORPORATION



DowKey® 571-581 Series Normally Open Terminated, SMA

Specifications :

Operating Voltage:

(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)

Coil Current (Nominal):

12 Vdc 324 mA
28 Vdc 140 mA

Switching Time:

15 mS maximum

Operating Temperature:

-25°C to +65°C

Mechanical Life, Cycles:

1 x 10⁶ minimum

Nominal Weight:

16.5 oz., (468 g)

The DowKey Microwave 7 to 8 Position Normally Open Terminated switch is a multi-position electro-mechanical coaxial switch with SMA connectors and 2 Watt, 50 Ohm internal terminations. The RF characteristics are excellent over the DC-18 GHz frequency range.

Options include 5 Watt terminations, a "D" type control connector, moisture seal, indicator contacts, special operating voltages, and TTL or BCD compatibility. Also available are BMA (Blind Mate) connectors which provide quick installation into Modular plug-in systems. The BMA connectors mate with OSP* female connectors.

*OSP is a registered trademark of M/A COM Omni-Spectra, Inc.

Typical applications for the 571-581 series include:

- Automatic Test Equipment
- Switch Matrixes
- Multi-Band or Alternate Source Selection

RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
DC-4-1	1.25	70	0.20	100
4-8	1.35	65	0.30	70
8-12	1.40	60	0.40	60
12-16	1.50	60	0.50	50
16-18	1.80	55	0.80	45

Power handling capability is for through path only. Internal termination is limited to 500 milliwatts dissipation.

Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Switch Configuration	
		SP7T	SP8T
12 Vdc	SMA	571-520803	581-520803
28 Vdc	SMA	571-530803	581-530803

Normally Open with Indicators

12 Vdc	SMA	571-520823	581-520823
28 Vdc	SMA	571-530823	581-530823



Normally Open with TTL Compatible Logic

12 Vdc	SMA	571-520803A	581-520803A
28 Vdc	SMA	571-530803A	581-530803A

Normally Open with Indicators, TTL Compatible Logic

12 Vdc	SMA	571-520823A	581-520823A
28 Vdc	SMA	571-530823A	581-530823A

Mechanical

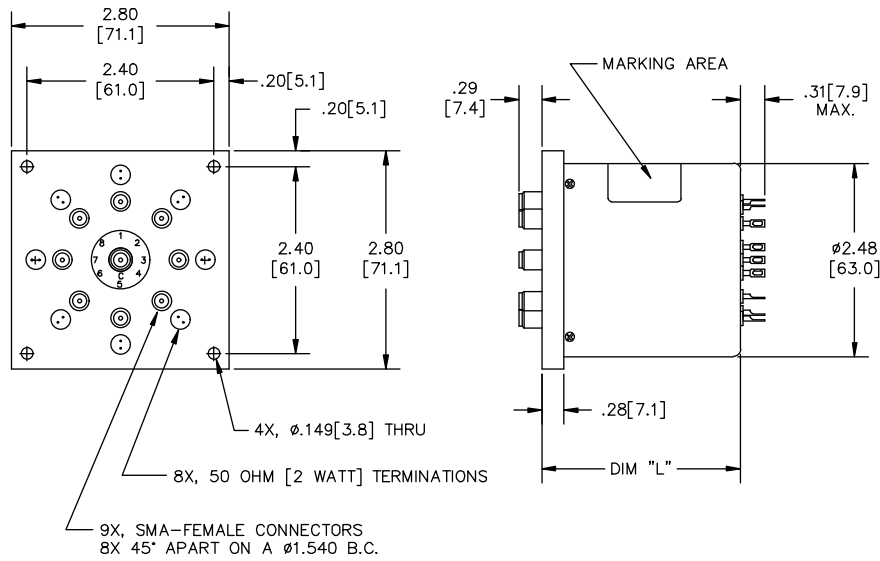

7 POSITION

DIM "L" (MAX)	MODEL
1.93 [49.0]	5X1-5X0803
2.25 [57.2]	5X1-5X0823
2.25 [57.2]	5X1-5X0803A
2.60 [66.0]	5X1-5X0823A

Available Options

Moisture Seal

15 or 25 PIN "D" Plug


Operating Voltages:
15, 20, 24 Vdc

-55°C to +85°C Operation

BCD Decoding Circuit

BMA Connectors

Electrical

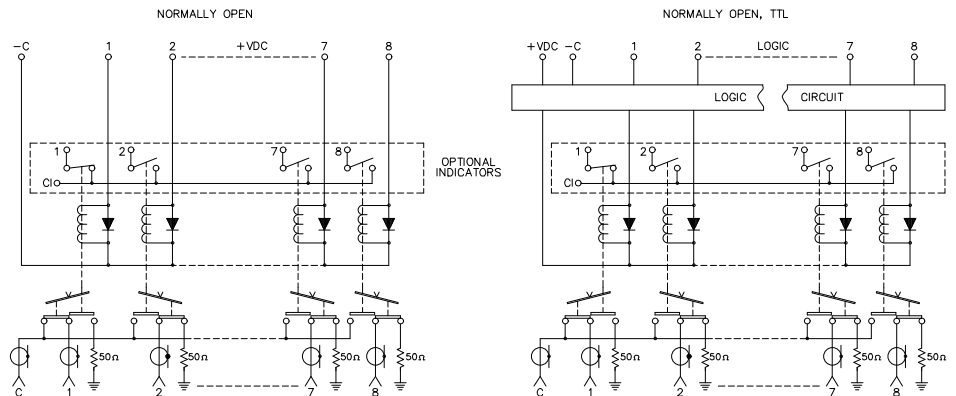



**DowKey®
Microwave**
CORPORATION



**DowKey® 571-581 Series
Latching, SMA**

Specifications :

- Operating Voltage:**
(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)
- Coil Current (Nominal):**
12 Vdc 414 mA
28 Vdc 158 mA
- Switching Time:**
15 mS maximum
- Operating Temperature:**
-25°C to +65°C
- Mechanical Life, Cycles:**
1 x 10⁶ minimum
- Nominal Weight:**
11.2 oz., (317g.)

The DowKey Microwave 7 to 8 Position Latching switch is a multi-position electro-mechanical coaxial switch with suppression diodes and a solid state self cut-off circuit. Utilizing SMA connectors, the RF characteristics are excellent over the DC-18 GHz frequency range.

Options include a "D" type control connector, moisture seal, indicator contacts, special operating voltages, and TTL or BCD compatibility. Also available are BMA (Blind Mate) connectors which provide quick installation into Modular plug-in systems. The BMA connectors mate with OSP* female connectors.

*OSP is a registered trademark of M/A COM Omni-Spectra, Inc.

Typical applications for the 571-581 series include:

- Automatic Test Equipment
- Switch Matrixes
- Multi-Band or Alternate Source Selection
- VXI Test Sets

RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
DC-4	1.25	70	0.20	100
4-8	1.35	65	0.30	70
8-12	1.40	60	0.40	60
12-16	1.50	60	0.50	50
16-18	1.80	55	0.80	45

Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Switch Configuration	
		SP7T	SP8T
12 Vdc	SMA	571-4208	581-4208
28 Vdc	SMA	571-4308	581-4308

Latching with Self Cut-Off, Indicators

12 Vdc	SMA	571-420822	581-420822
28 Vdc	SMA	571-430822	581-430822



Latching with Self Cut-Off, TTL Compatible Logic

12 Vdc	SMA	571-420802A	581-420802A
28 Vdc	SMA	571-430802A	581-430802A

Latching with Self Cut-Off, Indicators, TTL Compatible Logic

12 Vdc	SMA	571-420822A	581-420822A
28 Vdc	SMA	571-430822A	581-430822A

Mechanical

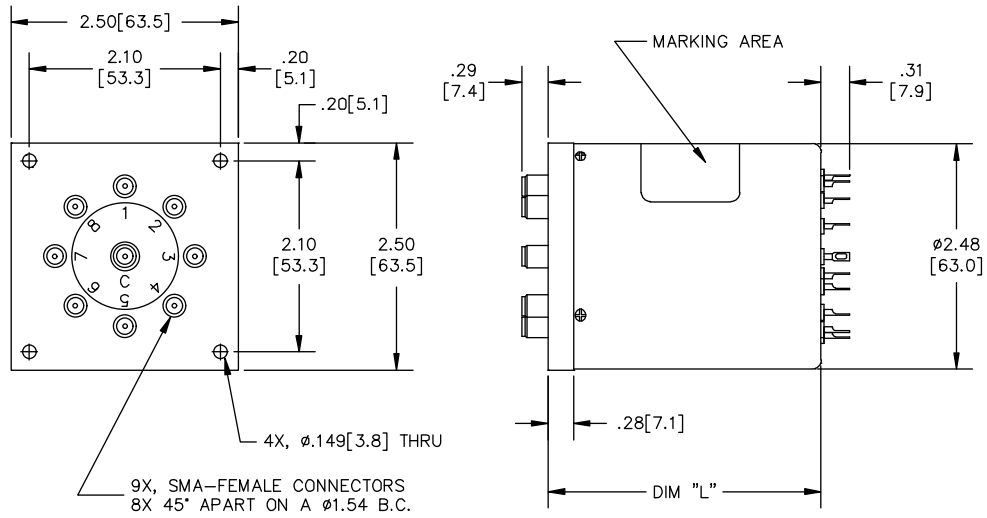

7 POSITION

DIM "L" (MAX)	MODEL
2.40 [61.0]	5X1-4X08
2.70 [68.6]	5X1-4X0822
2.70 [68.6]	5X1-4X0802A
3.00 [76.2]	5X1-4X0822A

Available Options

Moisture Seal

9, 15 or 25 PIN "D" Plug

Operating Voltages:
15, 20, 24 Vdc


-55°C to +85°C Operation

BCD Decoding Circuit

Negative Common

BMA Connectors

Electrical

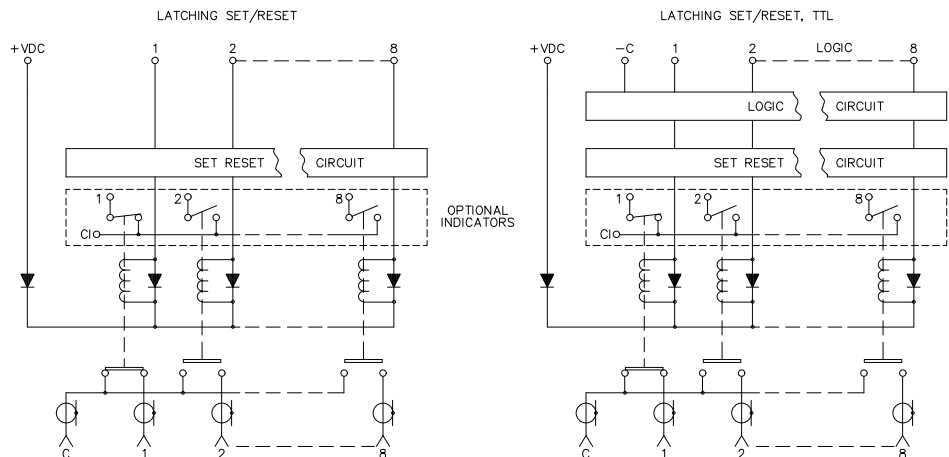



**DowKey®
Microwave**
CORPORATION



DowKey® 571-581 Series Latching Terminated, SMA

Specifications :

Operating Voltage:
(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)

Coil Current (Nominal):
12 Vdc 414 mA
28 Vdc 177 mA

Switching Time:
15 mS maximum

Operating Temperature:
-25°C to +65°C

Mechanical Life, Cycles:
1 x 10⁶ minimum

Nominal Weight:
14.5 oz., (411g.)

The DowKey Microwave 7 to 8 Position Latching Terminated switch is a multi-position electro-mechanical coaxial switch with suppression diodes and a solid state self cut-off circuit, and 2 Watt, 50 Ohm internal terminations. Utilizing SMA connectors, the RF characteristics are excellent over the DC-18 GHz frequency range.

Options include 5 Watt terminations, a "D" type control connector, moisture seal, indicator contacts, special operating voltages, and TTL or BCD compatibility. Also available are BMA (Blind Mate) connectors which provide quick installation into Modular plug-in systems. The BMA connectors mate with OSP* female connectors.

*OSP is a registered trademark of M/A COM Omni-Spectra, Inc.

Typical applications for the 571-581 series include:

- Automatic Test Equipment
- Switch Matrixes
- Multi-Band or Alternate Source Selection

RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
DC-4	1.25	70	0.20	100
4-8	1.35	65	0.30	70
8-12	1.40	60	0.40	60
12-16	1.50	60	0.50	50
16-18	1.80	55	0.80	45

Power handling capability is for through path only. Internal termination is limited to 500 milliwatts dissipation.

Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Switch Configuration	
		SP7T	SP8T
12 Vdc	SMA	571-420803	581-420803
28 Vdc	SMA	571-430803	581-430803

Latching with Self Cut-Off, Indicators

12 Vdc	SMA	571-420823	581-420823
28 Vdc	SMA	571-430823	581-430823


Latching with Self Cut-Off, TTL Compatible Logic

12 Vdc	SMA	571-420803A	581-420803A
28 Vdc	SMA	571-430803A	581-430803A


Latching with Self Cut-Off, Indicators, TTL Compatible Logic

12 Vdc	SMA	571-420823A	581-420823A
28 Vdc	SMA	571-430823A	581-430823A

Mechanical

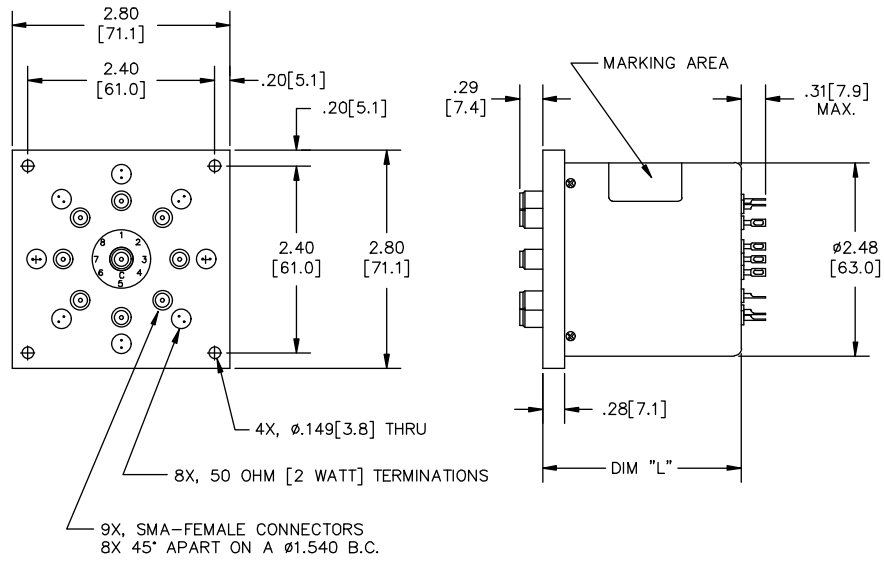

DIM "L" (MAX)	MODEL
2.40[61.0]	5X1-4X0803
2.70[68.6]	5X1-4X0823
2.70[68.6]	5X1-4X0803A
3.00[76.2]	5X1-4X0823A



7 POSITION

Available Options

Moisture Seal

15 or 25 PIN "D" Plug*

Operating Voltages:
15, 20, 24 Vdc


-55°C to +85°C Operation

BCD Decoding Circuit

Negative Common

BMA Connectors

Electrical

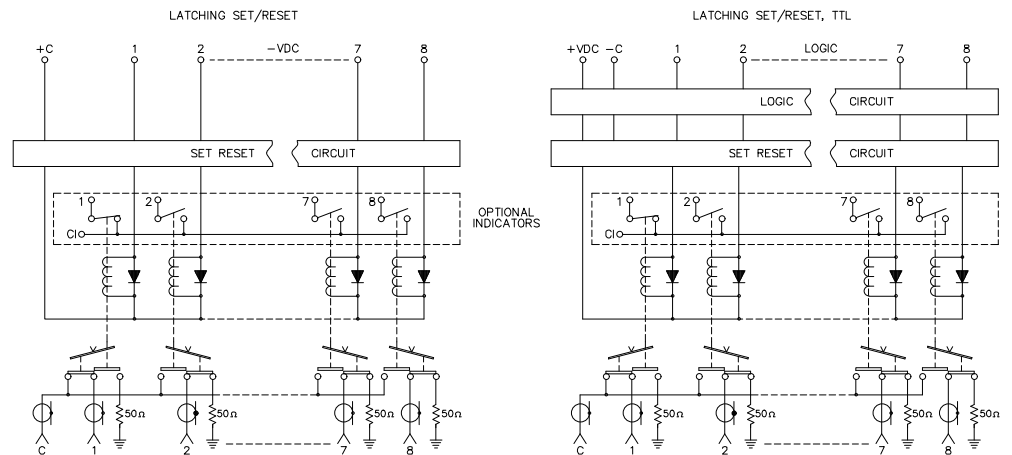



**DowKey®
Microwave**
CORPORATION



DowKey® 591-5A1 Series Normally Open, SMA

Specifications :

Operating Voltage:

(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)

Coil Current (Nominal):

12 Vdc 286 mA
28 Vdc 122 mA

Switching Time:

15 mS maximum

Operating Temperature:

-25°C to +65°C

Mechanical Life, Cycles:

1 x 10⁶ minimum

Nominal Weight:

5.5 oz., (156g.)

The DowKey 9 to 10 Position Normally Open switch is a multi-position electro-mechanical coaxial switch with SMA connectors. The RF characteristics are excellent over the DC-18 GHz frequency range.

Options include a "D" type control connectors, moisture seal, indicator contacts, suppression diodes, special operating voltages, and TTL or BCD compatibility. Also available are BMA (Blind Mate) connectors which provide quick installation into Modular plug-in systems. The BMA connectors mate with OSP* female connectors.

*OSP is a registered trademark of M/A COM Omni-Spectra, Inc.

Typical applications for the 591-5A1 series include:

- Automatic Test Equipment
- Switch Matrixes
- Multi-Band or Alternate Source Selection

RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
DC-4	1.25	70	0.20	100
4-8	1.35	65	0.30	70
8-12	1.40	60	0.40	60
12-16	1.50	60	0.6	50
16-18	1.80	55	0.80	45

Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Switch Configuration	
		SP9T	SP10T
12 Vdc	SMA	591-5208	5A1-5208
28 Vdc	SMA	591-5308	5A1-5308

Normally Open with Indicators

12 Vdc	SMA	591-520822	5A1-520822
28 Vdc	SMA	591-530822	5A1-530822



Normally Open with TTL Compatible Logic

12 Vdc	SMA	591-520802A	5A1-520802A
28 Vdc	SMA	591-530802A	5A1-530802A

Normally Open with Indicators, TTL Compatible Logic

12 Vdc	SMA	591-520822A	5A1-520822A
28 Vdc	SMA	591-530822A	5A1-530822A

Mechanical

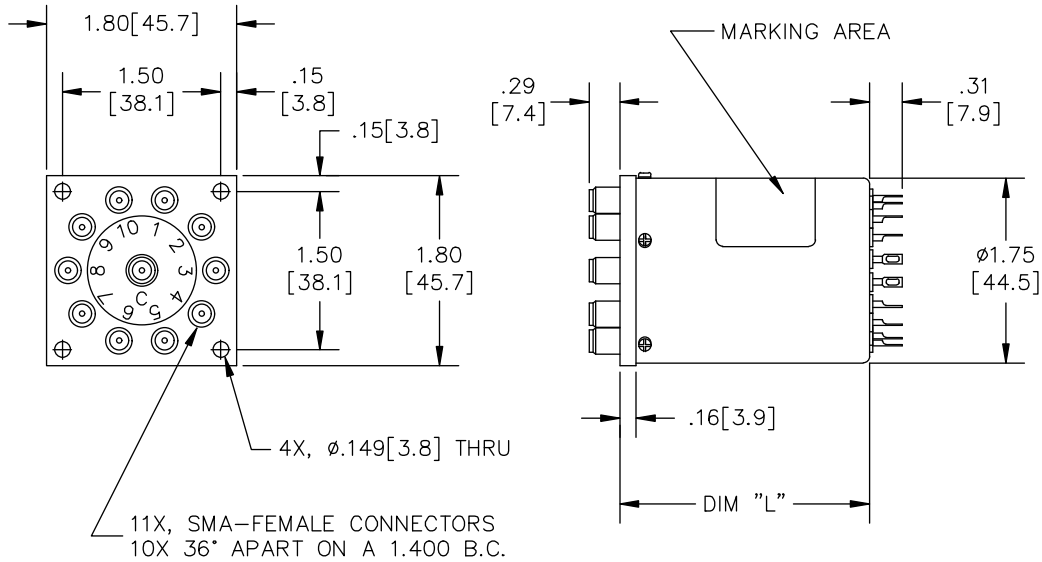

9 POSITION

DIM "L" (MAX)	MODEL
1.63 [41.4]	5X1-5X08
2.13 [54.1]	5X1-5X0822
2.23 [56.6]	5X1-5X0802A
2.71 [68.8]	5X1-5X0822A

Available Options

Moisture Seal

9, 15 or 25 PIN "D" Plug


Operating Voltages:
15, 20, 24 Vdc

-55°C to +85°C Operation

BCD Decoding Circuit

BMA Connectors

Electrical

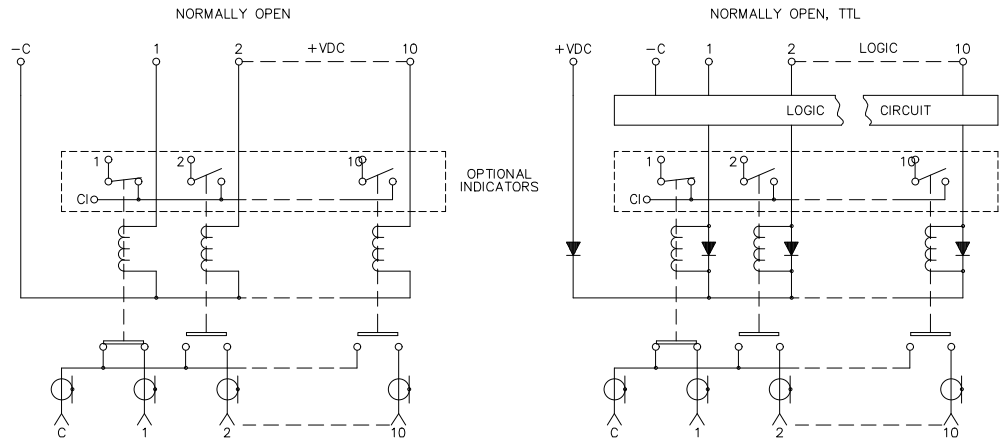



**DowKey®
Microwave**
CORPORATION



DowKey® 591-5A1 Series Normally Open Terminated, SMA

Specifications :

Operating Voltage:

(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)

Coil Current (Nominal):

12 Vdc 324 mA
28 Vdc 140 mA

Switching Time:

15 mS maximum

Operating Temperature:

-25°C to +65°C

Mechanical Life, Cycles:

1 x 10⁶ minimum

Nominal Weight:

17.5 oz., (496g.)

DowKey's 9 to 10 Position Normally Open switch is a multi-position electro-mechanical coaxial switch with SMA connectors. The RF characteristics are excellent over the DC-18 GHz frequency range.

Options include a "D" type control connectors, moisture seal, indicator contacts, suppression diodes, special operating voltages, and TTL or BCD compatibility. Also available are BMA (Blind Mate) connectors which provide quick installation into Modular plug-in systems. The BMA connectors mate with OSP* female connectors.

*OSP is a registered trademark of M/A COM Omni-Spectra, Inc.

Typical applications for the 591-5A1 Series include:

- Automatic Test Equipment
- Switch Matrixes
- Multi-Band or Alternate Source Selection

RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
DC-4	1.25	70	0.20	100
4-8	1.35	65	0.30	70
8-12	1.40	60	0.40	60
12-16	1.50	60	0.60	50
16-18	1.80	55	0.80	45

Power handling capability is for through path only. Internal termination is limited to 500 milliwatts dissipation.

Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Switch Configuration	
		SP9T	SP10T
12 Vdc	SMA	591-520803	5A1-520803
28 Vdc	SMA	591-530803	5A1-530803

Normally Open with Indicators

12 Vdc	SMA	591-520823	5A1-520823
28 Vdc	SMA	591-530823	5A1-530823




Normally Open with TTL Compatible Logic

12 Vdc	SMA	591-520803A	5A1-520803A
28 Vdc	SMA	591-530803A	5A1-530803A

Normally Open with Indicators, TTL Compatible Logic

12 Vdc	SMA	591-520823A	5A1-520823A
28 Vdc	SMA	591-530823A	5A1-530823A

Mechanical

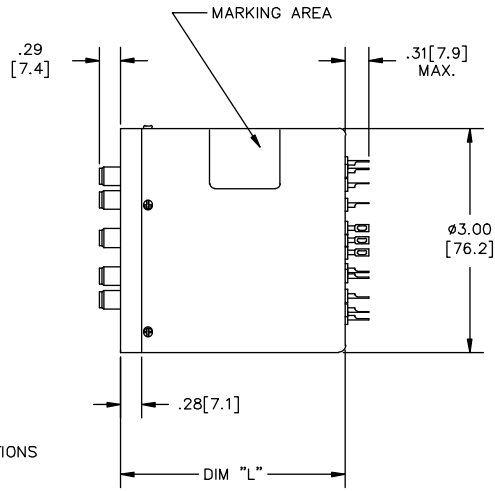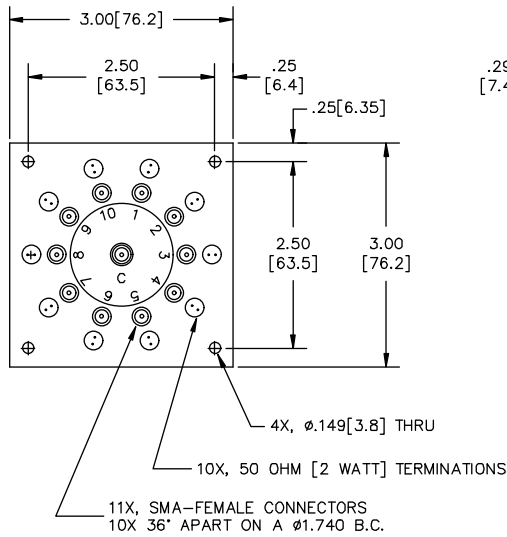

9 POSITION

DIM "L" (MAX)	MODEL
1.93 [49.0]	5X1-5X0803
2.27 [57.6]	5X1-5X0823
2.27 [57.6]	5X1-5X0803A
2.56 [65.0]	5X1-5X0823A

Available Options

Moisture Seal

15 or 25 PIN "D" Plug


Operating Voltages:
15, 20, 24 Vdc

-55°C to +85°C Operation

BCD Decoding Circuit

BMA Connectors

Electrical

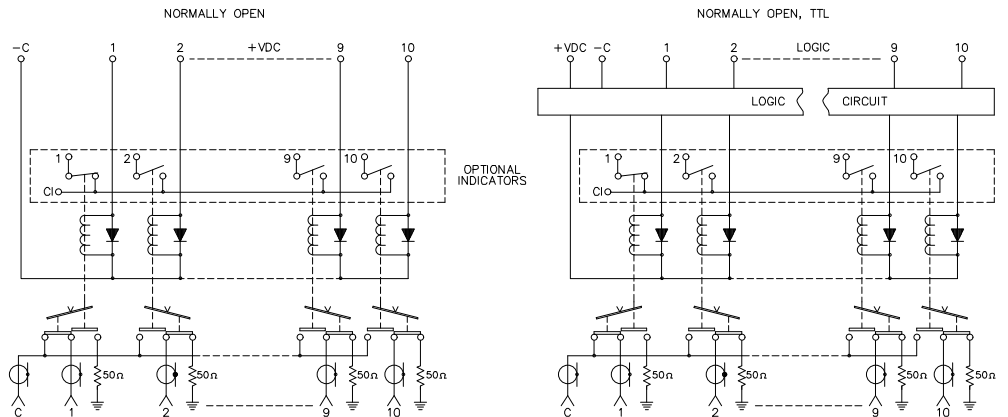



**DowKey®
Microwave**
CORPORATION



DowKey® 591-5A1 Series Latching, SMA

Specifications :

Operating Voltage:

(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)

Coil Current (Nominal):

12 Vdc 414 mA
28 Vdc 177 mA

Switching Time:

15 mS maximum

Operating Temperature:

-25°C to +65°C

Mechanical Life, Cycles:

1 x 10⁶ minimum

Nominal Weight:

14.9 oz., (422g.)

The DowKey 9 to 10 Position Latching switch is a multi-position electro-mechanical coaxial switch with SMA connectors. The RF characteristics are excellent over the DC-18 GHz frequency range.

Options include a "D" type control connector, moisture seal, indicator contacts, special operating voltages, and TTL or BCD compatibility. Also available are BMA (Blind Mate) connectors which provide quick installation into Modular plug-in systems. The BMA connectors mate with OSP* female connectors.

*OSP is a registered trademark of M/A COM Omni-Spectra, Inc.

Typical applications for the 591-5A1 Series include:

- Automatic Test Equipment
- Switch Matrixes
- Multi-Band or Alternate Source Selection
- VXI Test Sets

RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
DC-4	1.25	70	0.20	100
4-8	1.35	65	0.30	70
8-12	1.40	60	0.40	60
12-16	1.50	60	0.50	50
16-18	1.80	55	0.80	45

Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Switch Configuration	
		SP9T	SP10T
12 Vdc	SMA	591-4208	5A1-4208
28 Vdc	SMA	591-4308	5A1-4308

Latching with Self Cut-Off, Indicators

12 Vdc	SMA	591-420822	5A1-420822
28 Vdc	SMA	591-430822	5A1-430822



Latching with Self Cut-Off, TTL Compatible Logic

12 Vdc	SMA	591-420802A	5A1-420802A
28 Vdc	SMA	591-430802A	5A1-430802A

Latching with Self Cut-Off, Indicators, TTL Compatible Logic

12 Vdc	SMA	591-420822A	5A1-420822A
28 Vdc	SMA	591-430822A	5A1-430822A

Mechanical

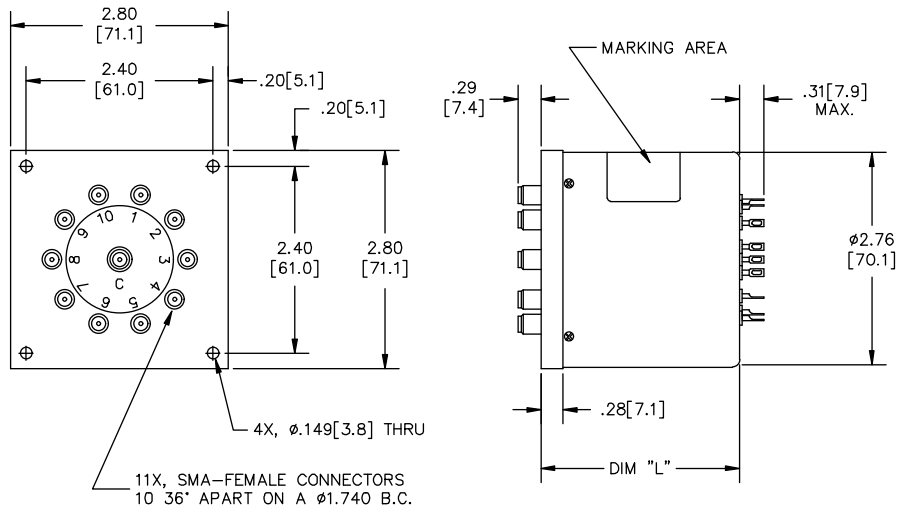

9 POSITION

DIM "L" (MAX)	MODEL
2.40 [61.0]	5X1-4X08
2.70 [68.6]	5X1-4X0822
2.70 [68.6]	5X1-4X0802A
3.00 [76.2]	5X1-4X0822A

Available Options

Moisture Seal

15 or 25 PIN "D" Plug

Operating Voltages:
15, 20, 24 Vdc


-55°C to +85°C Operation

BCD Decoding Circuit

Negative Common

BMA Connectors

Electrical

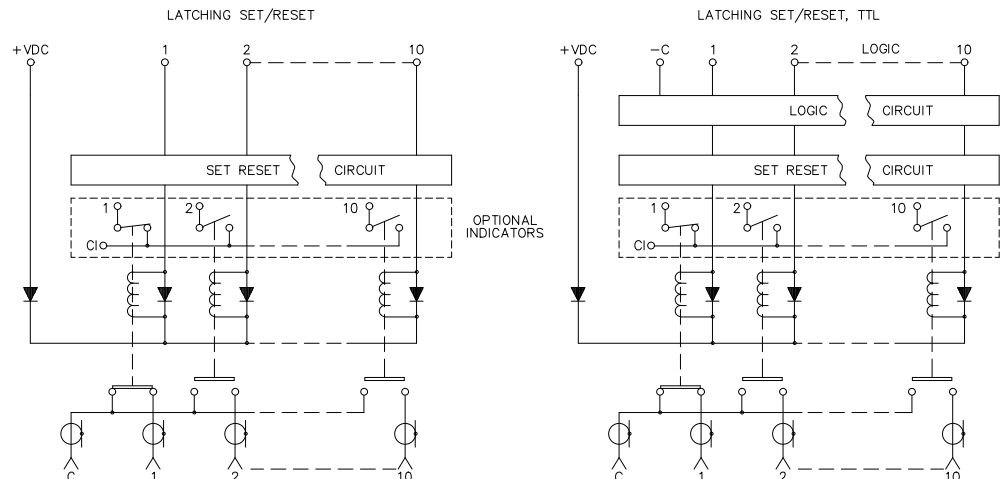



**DowKey®
Microwave**
CORPORATION



**DowKey® 591-5A1 Series
Latching Terminated, SMA**

Specifications :

- Operating Voltage:**
(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)
- Coil Current (Nominal):**
12 Vdc 414 mA
28 Vdc 177 mA
- Switching Time:**
15 mS maximum
- Operating Temperature:**
-25°C to +65°C
- Mechanical Life, Cycles:**
1 x 10⁶ minimum
- Nominal Weight:**
15.3 oz., (434g.)

The DowKey 9 to 10 Position Latching Terminated switch is a multi-position electro-mechanical coaxial switch with suppression diodes and a solid state self cut-off circuit. Utilizing SMA connectors, the RF characteristics are excellent over the DC-18 GHz frequency range.

Options include a "D" type control connector, moisture seal, indicator contacts, special operating voltages, and TTL or BCD compatibility. Also available are BMA (Blind Mate) connectors which provide quick installation into Modular plug-in systems. The BMA connectors mate with OSP* female connectors.

*OSP is a registered trademark of M/A COM Omni-Spectra, Inc.

Typical applications for the 591-5A1 Series include:

- Automatic Test Equipment
- Switch Matrixes
- Multi-Band or Alternate Source Selection

RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
DC-4	1.25	70	0.20	100
4-8	1.35	65	0.30	70
8-12	1.40	60	0.40	60
12-16	1.50	60	0.60	50
16-18	1.80	55	0.80	45

Power handling capability is for through path only. Internal termination is limited to 500 milliwatts dissipation.

Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Switch Configuration	
		SP9T	SP10T
12 Vdc	SMA	591-420803	5A1-420803
28 Vdc	SMA	591-430803	5A1-430803

Latching with Self Cut-Off, Indicators

12 Vdc	SMA	591-420823	5A1-420823
28 Vdc	SMA	591-430823	5A1-430823



Latching with Self Cut-Off, TTL Compatible Logic

12 Vdc	SMA	591-420803A	5A1-420803A
28 Vdc	SMA	591-430803A	5A1-430803A

Latching with Self Cut-Off, Indicators, TTL Compatible Logic

12 Vdc	SMA	591-420823A	5A1-420823A
28 Vdc	SMA	591-430823A	5A1-430823A

Mechanical

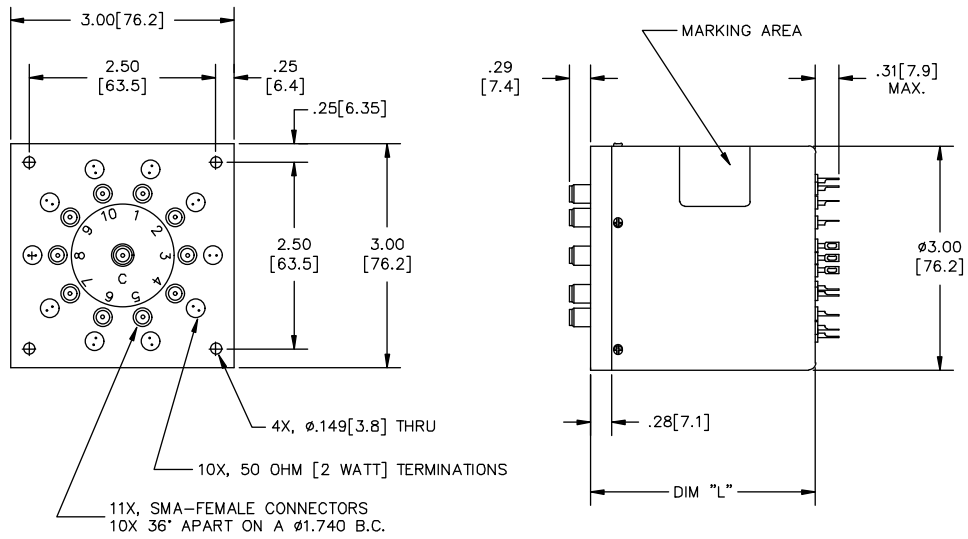

9 POSITION

DIM "L" (MAX)	MODEL
2.40 [61.0]	5X1-4X0803
2.70 [68.6]	5X1-4X0823
2.70 [68.6]	5X1-4X0803A
3.00 [76.2]	5X1-4X0823A

Available Options

Moisture Seal

15 or 25 PIN "D" Plug

Operating Voltages:
15, 20, 24 Vdc


-55°C to +85°C Operation

BCD Decoding Circuit

Negative Common

BMA Connectors

Electrical

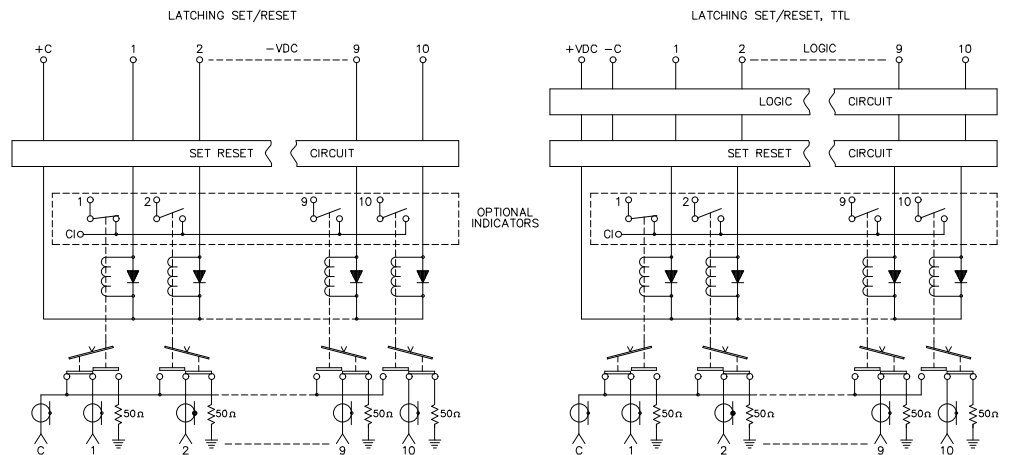



DowKey®
Microwave
CORPORATION

Available with two types of internal drive electronics (Binary Decoding or MOSFET Pulse Latching), these SP3T and SP4T IN-LINE Series Multithrow Switches are ideal for test equipment and simple switch matrix applications. Featuring excellent insertion loss and isolation performance through 18 GHz, along with the DowKey INTELLIGENT RELAY internal electronics, the 433 and 443 Series are suitable for many systems applications.

Typical applications for the 433-443 Series include:

- Test Equipment Band Selection
- Switch Matrixes



DowKey® 433 & 443 Series
INTELLIGENT RELAY
SP3T & SP4T IN-LINE

Specifications :

- Operating Voltage:**
(across temperature range)
15 Vdc (14-17 Vdc)
28 Vdc (24-32 Vdc)
- Coil Current (Nominal):**
15 Vdc 187 mA
28 Vdc 177 mA
- Switching Time:**
15 mS maximum
- Operating Temperature:**
0°C to +65°C
- Mechanical Life, Cycles:**
1 x 10⁶ minimum
- RF Connectors:**
SMA-Female Only

RF Characteristics


Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
0-1	1.50	80	0.20	100
1-4	1.50	70	0.30	50
4-8	1.50	65	0.40	25
8-12	1.60	60	0.50	15
12-18	2.00	60	1.00	10

Power handling capability is for through path only. Optional internal termination is limited to 500 milliwatts dissipation


Connectors and Part Numbers

	Terminations		Descriptions
	None	50Ω	
SP3T Switches			
433-320802C	433-320803C		12 Vdc Coil, MOSFET Drivers, Pulse Latching
433-330802C	433-330803C		28 Vdc Coil, MOSFET Drivers, Pulse Latching
433-420802E	433-420803E		12 Vdc Coil, Binary Decoding, with ENABLE, Latching, Self-Cutoff
433-420802E	433-420803E		28 Vdc Coil, Binary Decoding, with ENABLE, Latching, Self-Cutoff
SP4T Switches			
443-320802C	443-320803C		12 Vdc Coil, MOSFET Drivers, Pulse Latching
443-330802C	443-330803C		28 Vdc Coil, MOSFET Drivers, Pulse Latching
443-420802E	443-420803E		12 Vdc Coil, Binary Decoding, with ENABLE, Latching, Self-Cutoff
443-420802E	443-430803E		28 Vdc Coil, Binary Decoding, with ENABLE, Latching, Self-Cutoff

Mechanical

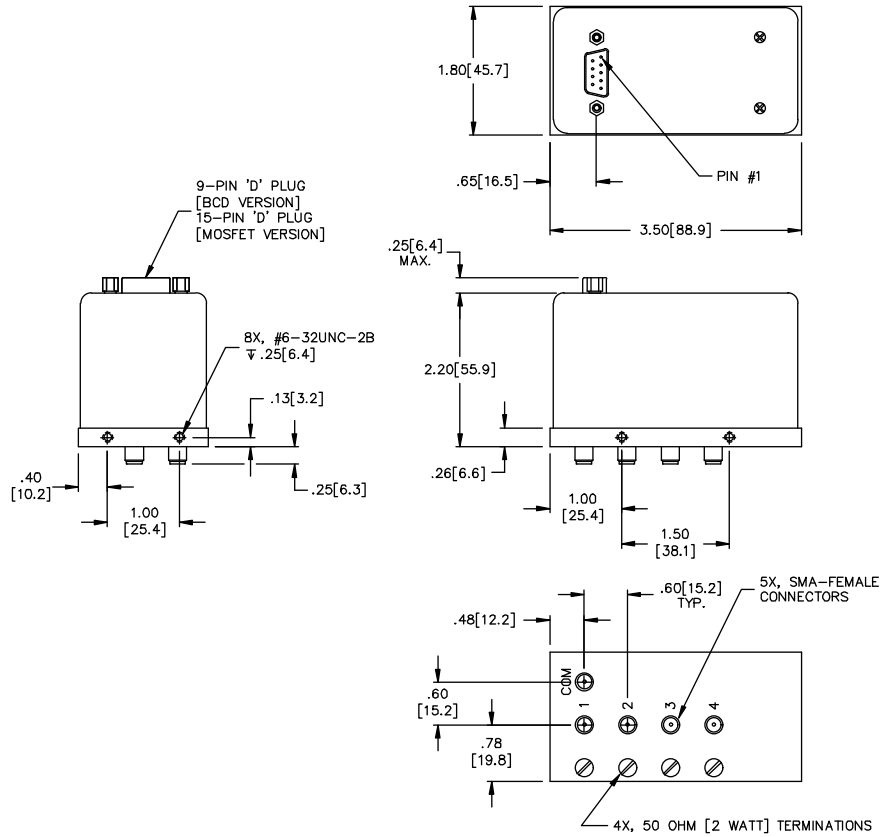

Electrical

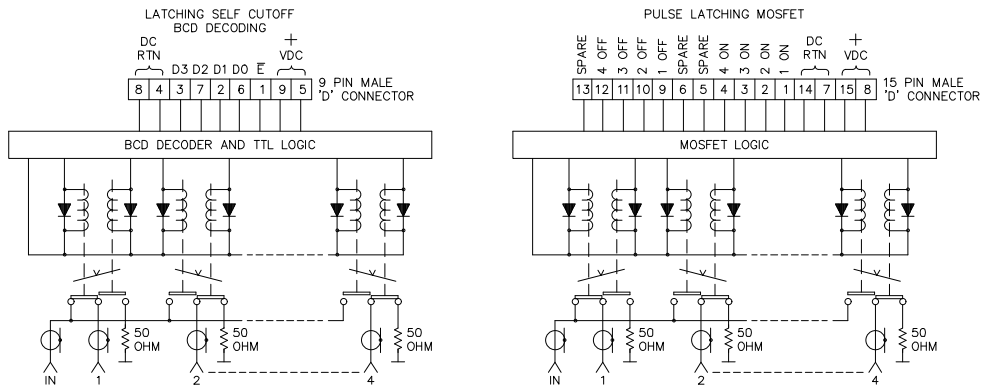



**DowKey®
Microwave**
CORPORATION

Available with either CMOS Binary logic decoding circuits or MOSFET pulse latching electronics, these DowKey INTELLIGENT RELAY Multithrow Switches were designed to simplify the physical construction and reduce the amount of supporting (logic and switch driver) electronics required to implement complex switch assemblies. These SP7T and SP10T DowKey INTELLIGENT RELAY IN-LINE Multithrow Switches are ideal for complex switch matrix or test equipment applications.

Typical applications for the 473-4A3 Series include:

- Test Equipment Band Selection
- Switch Matrixes



**DowKey® 473 to 4A3 Series
INTELLIGENT RELAY
SP7T & SP10T IN-LINE**

RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)			RF Power Watts (CW)
			1-3	4-6	7-10	
0-2	1.50	80	0.20	0.30	0.40	50
2-8	1.50	70	0.40	0.50	0.80	25
8-12	1.50	65	0.50	0.70	1.00	15
12-18	2.00	60	1.00	1.50	2.00	10

Power handling capability is for through path only. Optional internal termination is limited to 500 milliwatts dissipation


Specifications :

- Operating Voltage:**
(across temperature range)
15 Vdc 187 mA
28 Vdc (24-32 Vdc)
- Coil Current (Nominal):**
15 Vdc 187 mA
28 Vdc 177 mA
- Switching Time:**
15 mS maximum
- Operating Temperature:**
0°C to +65°C
- Mechanical Life, Cycles:**
1 x 10⁶ minimum
- RF Connectors:**
SMA-Female Only



Connectors and Part Numbers

Terminations		Descriptions
None	50Ω	
SP7T Switches		
473-320802C	473-320803C	12 Vdc Coil, MOSFET Drivers, Pulse Latching
473-330802C	473-330803C	28 Vdc Coil, MOSFET Drivers, Pulse Latching
473-420802E	473-420803E	12 Vdc Coil, Binary Decoding, with ENABLE, Latching, Self-Cutoff
473-420802E	473-430803E	28 Vdc Coil, Binary Decoding, with ENABLE, Latching, Self-Cutoff
SP8T Switches		
483-320802C	483-320803C	12 Vdc Coil, MOSFET Drivers, Pulse Latching
483-330802C	483-330803C	28 Vdc Coil, MOSFET Drivers, Pulse Latching
483-420802E	483-420803E	12 Vdc Coil, Binary Decoding, with ENABLE, Latching, Self-Cutoff
483-430802E	483-430803E	28 Vdc Coil, Binary Decoding, with ENABLE, Latching, Self-Cutoff
SP9T Switches		
493-320802C	493-320803C	12 Vdc Coil, MOSFET Drivers, Pulse Latching
493-330802C	493-330803C	28 Vdc Coil, MOSFET Drivers, Pulse Latching
493-420802E	493-420803E	12 Vdc Coil, Binary Decoding, with ENABLE, Latching, Self-Cutoff
493-430802E	493-430803E	28 Vdc Coil, Binary Decoding, with ENABLE, Latching, Self-Cutoff
SP4T Switches		
4A3-320802C	4A3-320803C	12 Vdc Coil, MOSFET Drivers, Pulse Latching
4A3-330802C	4A3-330803C	28 Vdc Coil, MOSFET Drivers, Pulse Latching
4A3-420802E	4A3-420803E	12 Vdc Coil, Binary Decoding, with ENABLE, Latching, Self-Cutoff
4A3-430802E	4A3-430803E	28 Vdc Coil, Binary Decoding, with ENABLE, Latching, Self-Cutoff

Mechanical

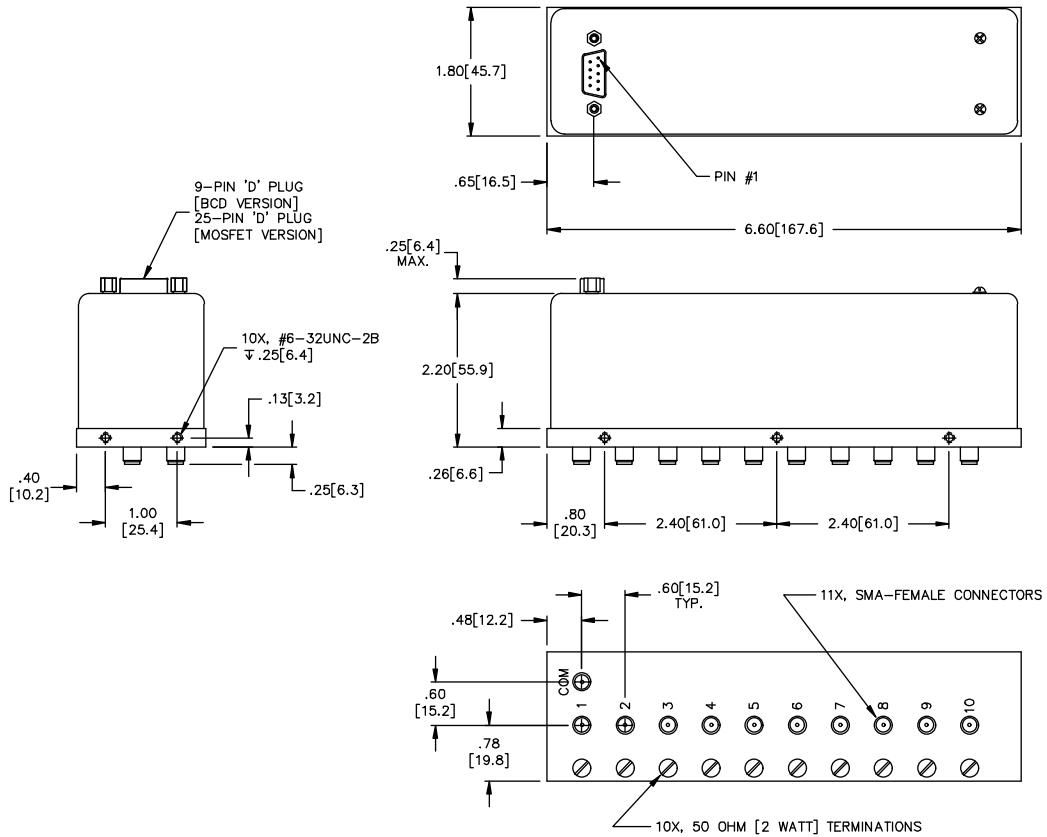

Electrical

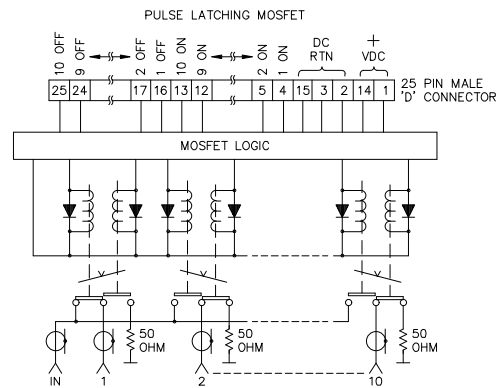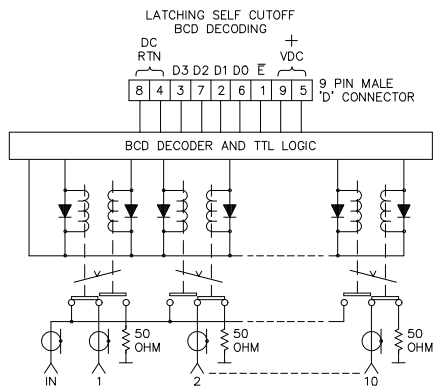



**DowKey®
Microwave**
CORPORATION

Available with either 15 Vdc or 28 Vdc actuator coils, these DowKey INTELLIGENT RELAY IN-LINE Series SP12T Multithrow Switches are available with internal binary decoding CMOS logic circuits with latching self cut-off drivers. The IN-LINE construction has the common port in the center of the RF cavity to provide excellent electrical performance through 18 GHz. The 4C3 Series switches are ideal for large switch matrix or complicated automatic test equipment switching applications.

Typical applications for the 4C3 Series include:

- Test Equipment Band Selection
- Switch Matrixes



**DowKey® 4C3 Series
INTELLIGENT RELAY
SP12T IN-LINE**

Specifications :

- Operating Voltage:**
(across temperature range)
15 Vdc (14-17 Vdc)
28 Vdc (24-32 Vdc)
- Coil Current (Nominal):**
15 Vdc 187 mA
28 Vdc 177 mA
- Switching Time:**
15 mS maximum
- Operating Temperature:**
0°C to +65°C
- Mechanical Life, Cycles:**
1 x 10⁶ minimum
- RF Connectors:**
SMA-Female Only

RF Characteristics


Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)			RF Power Watts (CW)
			1-4	5-8	9-12	
0-2	1.50	80	0.20	0.30	0.40	50
2-8	1.50	70	0.40	0.50	0.60	25
8-12	1.60	60	0.50	0.60	0.80	15
12-18	2.00	60	1.00	1.50	2.00	10

Power handling capability is for through path only. Optional internal termination is limited to 500 milliwatts dissipation


Connectors and Part Numbers

	Terminations		Descriptions
	None	50Ω	
SP7T Switches			
4C3-420802E	4C3-420803E		12 Vdc Coil, Binary Decoding, with ENABLE, Latching, Self-Cutoff
4C3-430802E	4C3-430803E		28 Vdc Coil, Binary Decoding, with ENABLE, Latching, Self-Cutoff

Mechanical

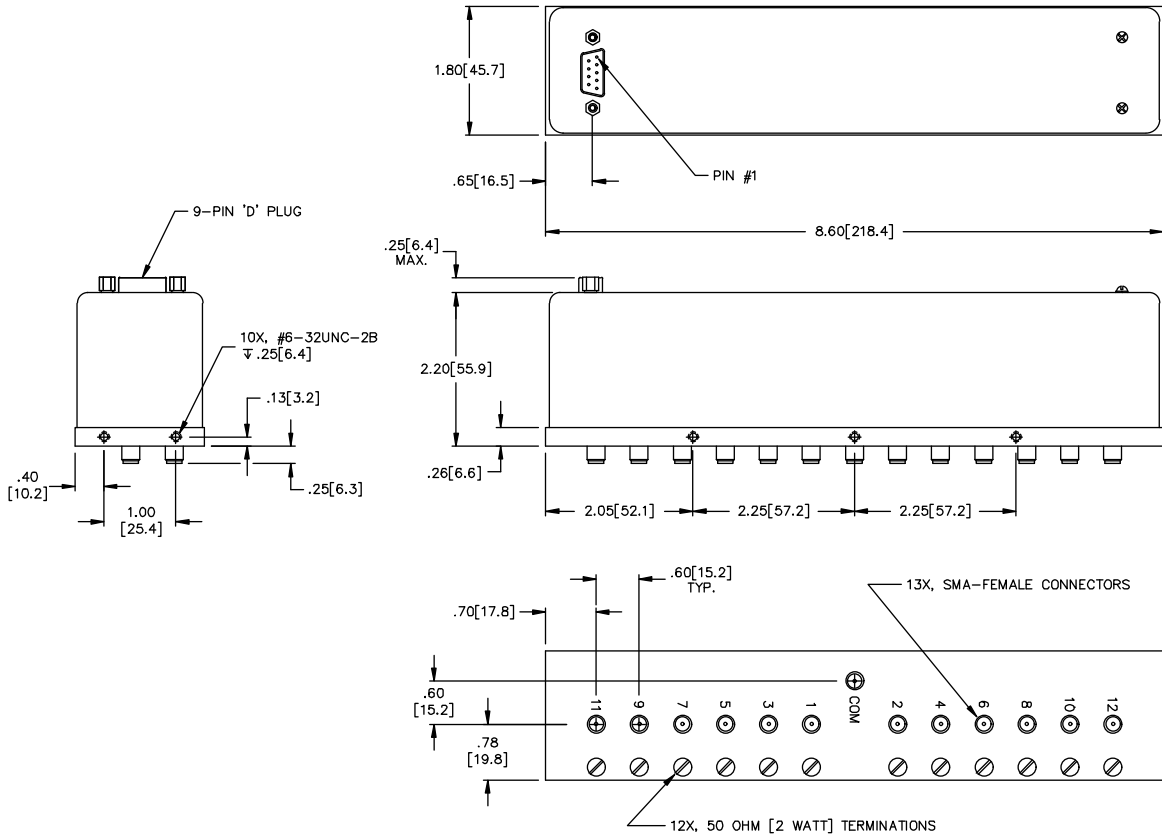

Electrical

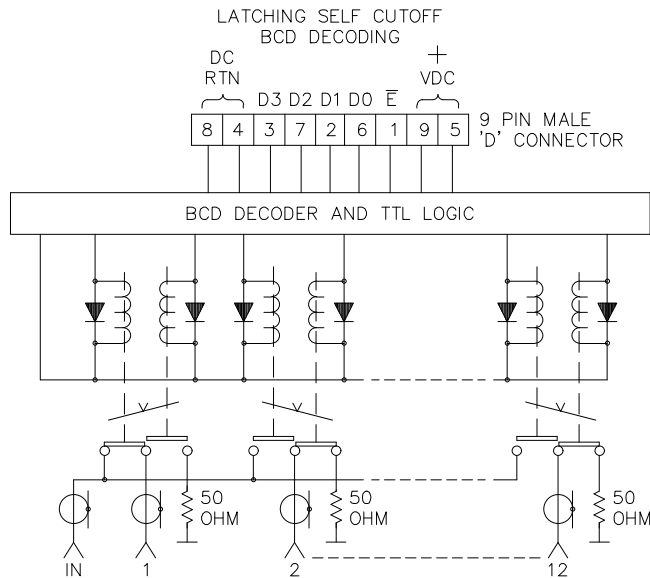



**DowKey®
Microwave**
CORPORATION

This DPDT switch is two SPDT relays (similar to the DowKey 164 Series) mounted together on a common plate with a single actuating coil. The connectors are all opposite the mounting surface, allowing easy access and flush-mount capability. With excellent RF performance, this low cost dual relay is suitable for most general purpose switching applications.

Typical applications for the 46 Series include:

- RF and Microwave Communications
- Dual-Monitor Video Switching
- Magnetic Resonance Imaging Systems
- RF and Video Switching



**DowKey® 46 Series
DPDT Switch**

Specifications :

- Operating Voltage:**
(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)
- Coil Current (Nominal):**
12 Vdc 250 mA
28 Vdc 114 mA
- Operate Time:**
20 mS maximum
- Operating Temperature:**
0°C to +65°C
- Mechanical Life, Cycles:**
1 x 10⁶ minimum
- Nominal Weight:**
9.5 oz., (270g.)


RF Characteristics

Frequency MHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
0-50	1.03	60	0.03	150
50-100	1.05	52	0.04	150-125
100-200	1.07	45	0.05	125-100
200-400	1.12	40	0.10	100-75
400-1,000	1.20	30	0.15	75-50


Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Standard
12 Vdc	BNC	46-2202
28 Vdc	BNC	46-2302
115 Vac	BNC	46-2602
12 Vdc	TNC	46-2203
28 Vdc	TNC	46-2303
115 Vac	TNC	46-2603

Mechanical

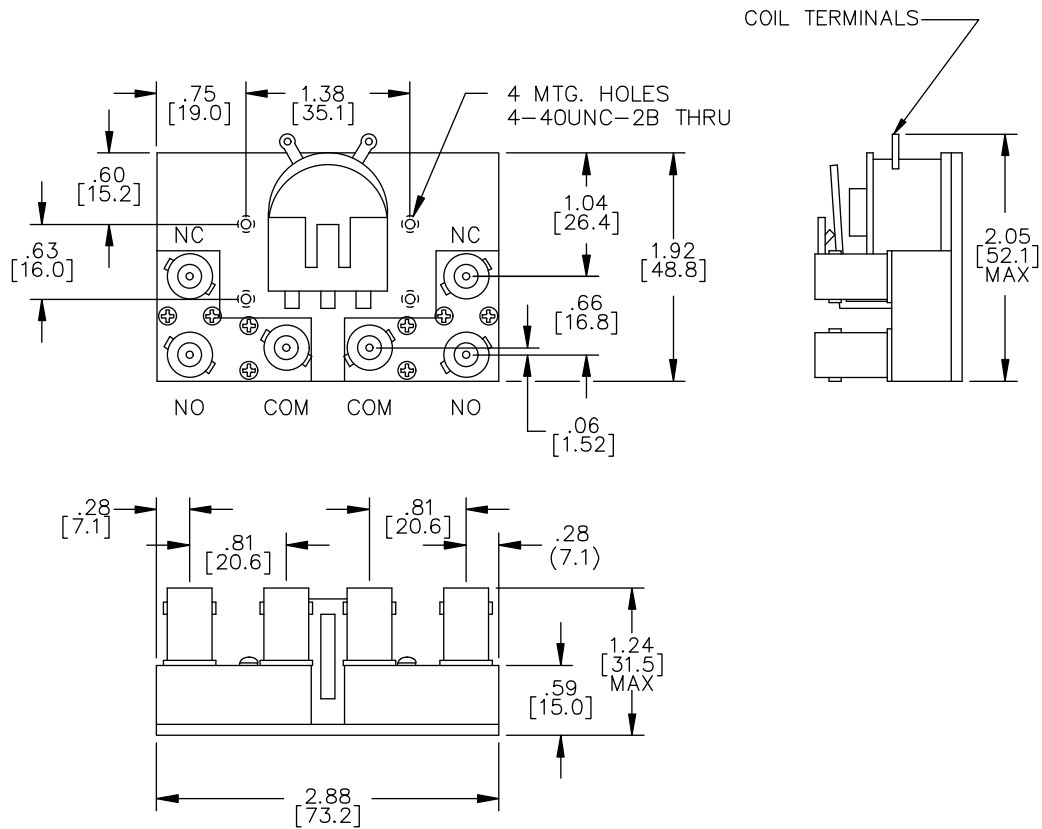


Electrical

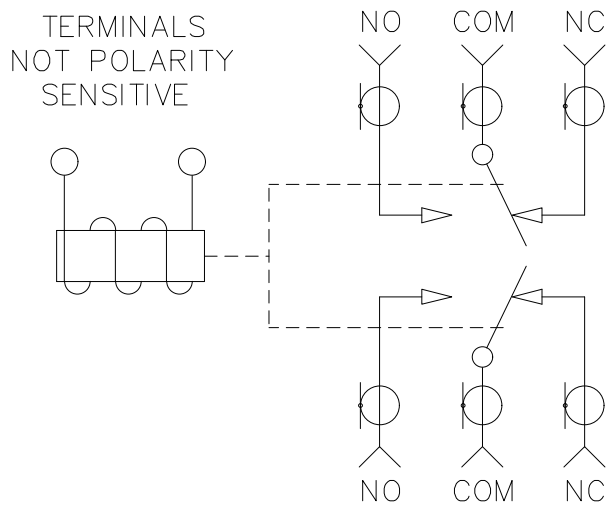



**DowKey®
Microwave**
CORPORATION

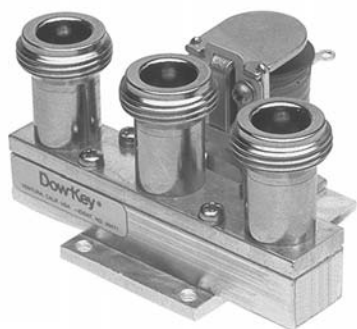

**DowKey® 54 Series
SPDT Switch**

Specifications :

- Operating Voltage:**
(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)
- Coil Current (Nominal):**
12 Vdc 171 mA
28 Vdc 96 mA
- Operate Time:**
20 mS maximum
- Operating Temperature:**
0°C to +65°C
- Mechanical Life, Cycles:**
1 x 10⁶ minimum
- Nominal Weight:**
4.5 oz., (125g)

With a maximum power rating of 150 Watts CW, these medium size switches can be used in a variety of switching functions. The DowKey 54 Series switches have all connectors mounted on the same plane as the power coil, and this switch may be flush mounted on any available surface. The 54 Series switches are manufactured with gold-plated silver contacts and a two-blade construction which achieves a minimum of 50 dB isolation at 50 MHz and 35 dB isolation at 3 GHz. Also available are different connector locations as the 55, 56 and 62 Series. All configurations have the same RF performance as the 54 Series.

Typical applications for the 54 Series include:

- Low Frequency Signal Switching
- Test Equipment
- Television Broadcast Equipment
- Medium Power Amplifier Switching, up to 500 Watts at UHF


RF Characteristics

Frequency MHz	VSWR Grounded (max)	VWSR Non-Grounded (max)	Isolation Grounded dB (min)	Isolation Non-Grounded dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
50	1.05	1.05	75	55	0.10	150
100	1.06	1.06	70	50	0.10	125
200	1.07	1.07	64	42	0.10	100
400	1.10	1.15	60	38	0.10	100
1,000	1.15	1.20	55	32	0.20	75
2,000	1.20	1.25	48	29	0.30	50
3,000	1.30	1.40	35	--	0.40	25



Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Grounded	Non-Grounded	50Ω Termination	75Ω Termination
12 Vdc	N	54-220101	54-220102	54-220103	54-220104
28 Vdc	N	54-230101	54-230102	54-230103	54-230104
115 Vac	N	54-260101	54-260102	54-260103	54-260104
12 Vdc	BNC	54-220201	54-220202	54-220203	54-220204
28 Vdc	BNC	54-230201	54-230202	54-230203	54-230204
115 Vac	BNC	54-260201	54-260202	54-260203	54-260204
12 Vdc	TNC	54-220301	54-220302	54-220303	54-220304
28 Vdc	TNC	54-230301	54-230302	54-230303	54-230304
115 Vac	TNC	54-260301	54-260302	54-260303	54-260304




Mechanical

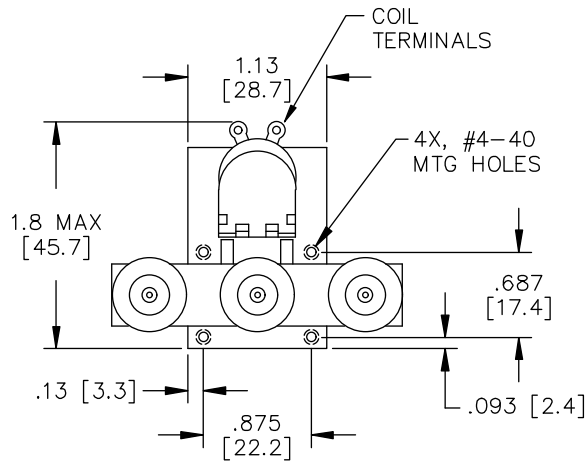



TYPICAL CONNECTOR LENGTHS			
CONN. DIM.	N 01 (Shown)	BNC 02	TNC 03
A	2.350 [59.7]	2.000 [50.8]	2.000 [50.8]
B	1.750 [44.5]	1.560 [39.6]	1.560 [39.6]
C	.875 [22.2]	.780 [19.8]	.780 [19.8]
D	.760 [19.3]	.635 [16.1]	.635 [16.1]

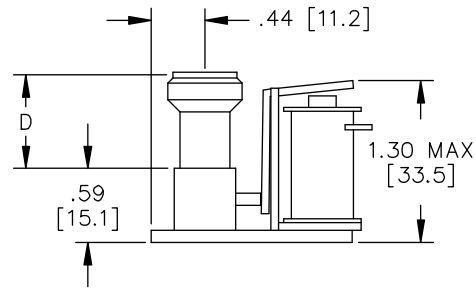

Available Options



Electrical

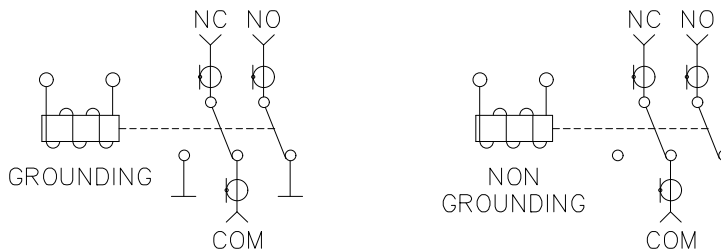



**DowKey®
Microwave**
CORPORATION



**DowKey® 60 Series
SPDT Switch**

Specifications :

Operating Voltage:

(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)

Coil Current (Nominal):

12 Vdc 250 mA
28 Vdc 108 mA

Operate Time:

20 mS maximum

Operating Temperature:

0°C to +65°C

Mechanical Life, Cycles:

1 x 10⁶ minimum

Nominal Weight:

12.0 oz., (340g.)

The DowKey 60 Series coaxial relays are ruggedly constructed and designed for operation to a maximum power level of 1 kilowatt. They have been the standard for air traffic control and two way radio systems for over forty years.

Also available in the 60 Series is a patented, high isolation option ("G" option) for transmit-receive applications. This option leaves the unused input open, and increases the isolation on the N/C connector to 85 dB at frequencies up to 500 MHz. This option reduces the maximum power rating of the N/C connector to 20 Watts, and will increase the VSWR of this terminal above approximately 400 MHz. They are available with or without two form "C" auxiliary contacts.

Typical applications for the 60 Series include:

- Transmit-Receive Switching
- Communication Antenna Switching
- Video Switching
- Hot Standby Transmitters or Receivers

RF Characteristics


Frequency MHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
50	1.10	40	0.10	1,000
100	1.15	35	0.15	1,000
400	1.30	25	0.20	500
1,000	1.60	20	0.25	350

Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	SPDT	SPDT w/DPDT Aux. Contacts	"G" Option	"G" Option w/DPDT Aux. Con.
12 Vdc	N	60-2201	60-220142	60-2225	60-222542
28 Vdc	N	60-2301	60-230142	60-2325	60-232542
115 Vac	N	60-2601	60-260142	60-2625	60-262542
12 Vdc	BNC	60-2202	60-220242	60-2226	60-222642
28 Vdc	BNC	60-2302	60-230242	60-2326	60-232642
115 Vac	BNC	60-2602	60-260242	60-2626	60-262642
12 Vdc	UHF*	60-2204	60-220442	60-2228	60-222842
28 Vdc	UHF*	60-2304	60-230442	60-2328	60-232842
115 Vac	UHF*	60-2604	60-260442	60-2628	60-262842

*Not recommended for applications above 300 MHz.


Mechanical

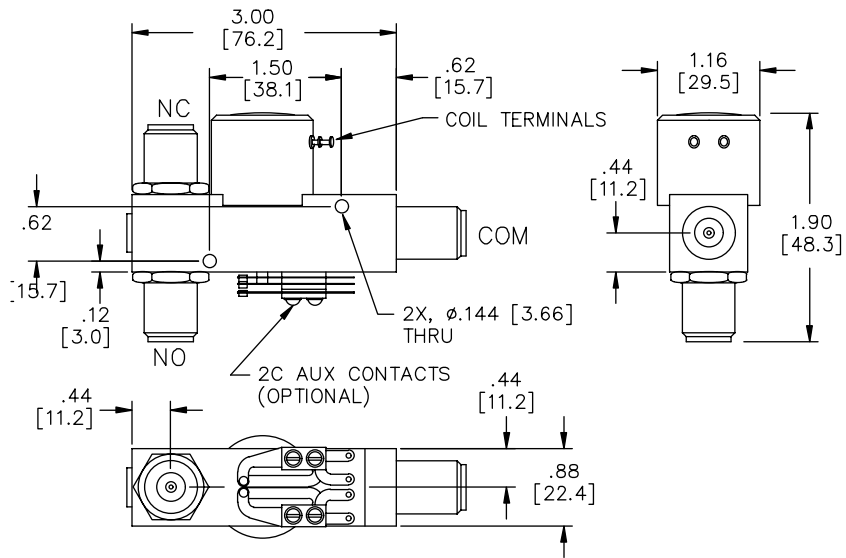

TYPICAL CONNECTOR LENGTHS

CONN. DIM.	N 01 (Shown)	BNC 02	UHF 04	C 05	N"G" 25	BNC"G" 26	UHF"G" 28
NC	0.70 [17.8]	0.60 [15.2]	0.70 [17.8]	0.70 [17.8]	1.20 [30.5]	1.20 [30.5]	1.00 [25.4]
NO	0.70 [17.8]	0.60 [15.2]	0.70 [17.8]	0.70 [17.8]	0.70 [17.8]	0.60 [15.2]	0.70 [17.8]
COMMON	0.50 [12.7]	0.70 [17.8]	0.50 [12.7]	0.50 [12.7]	0.50 [12.7]	0.70 [17.8]	0.50 [12.7]

Electrical

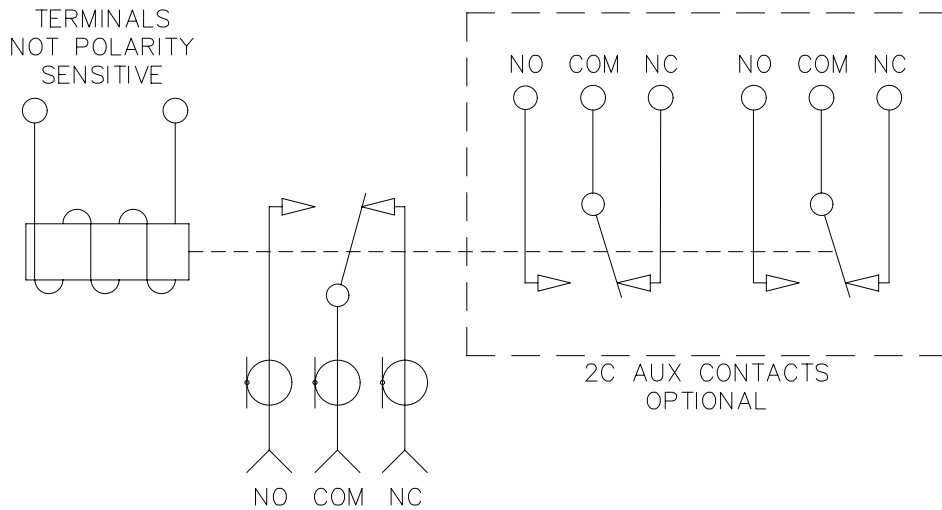



**DowKey®
Microwave**
CORPORATION

The DowKey 63 Series SPDT Failsafe Relay provides an enclosed actuator for use in environments where dust or moisture may be encountered.

Typical applications for the 63 Series include:

- ILS Air Traffic Control Equipment
- UHF/UHF Standby Transmitters and Receivers



**DowKey® 63 Series
SPDT Failsafe Switches**

Specifications :

- Operating Voltage:**
(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)
- Coil Current (Nominal):**
12 Vdc 255 mA
28 Vdc 112 mA
- Operate Time:**
20 mS maximum
- Operating Temperature:**
-25°C to +65°C
- Mechanical Life, Cycles:**
1 x 10⁶ minimum
- Nominal Weight:**
6.0 oz., (170g.)


RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
0-.5	1.10	70	0.10	150-100
.5-2	1.30	50	0.20	100-75
2-3	1.40	45	0.30	75-50

Connectors and Part Numbers


Nominal Coil Voltage	Connector Type	Failsafe Standard SPDT
12 Vdc	N	63-2201
28 Vdc	N	63-2301

Mechanical

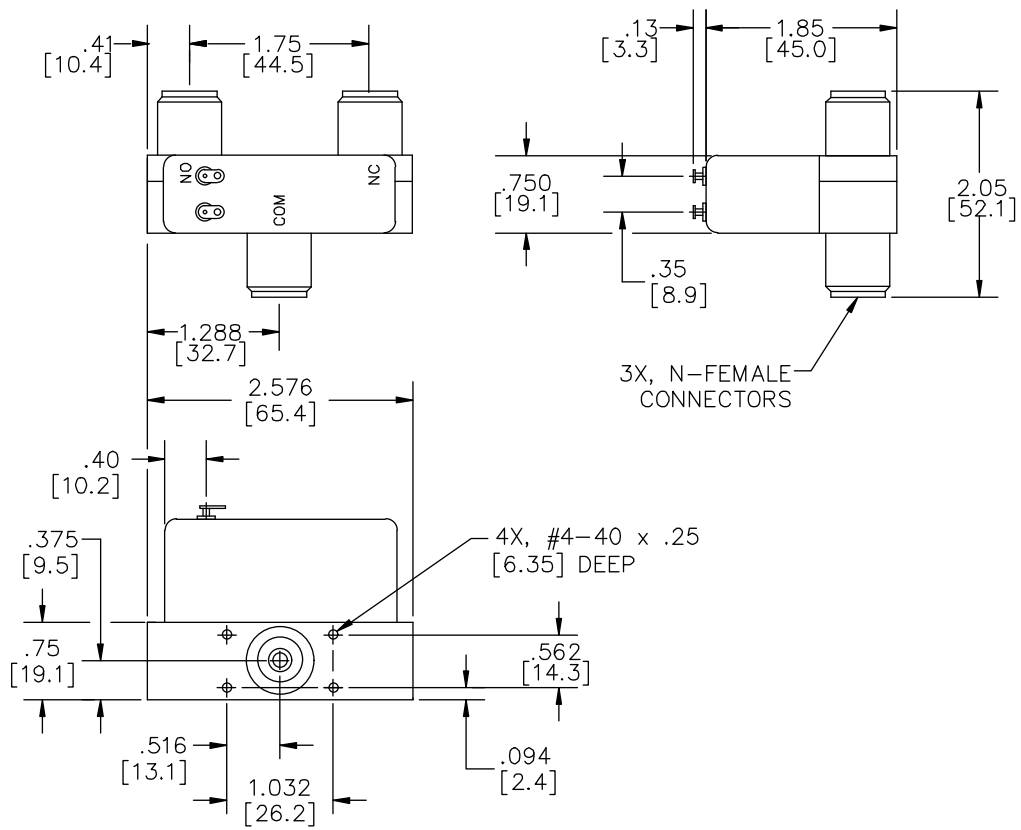

Electrical

TERMINALS
NOT POLARITY
SENSITIVE

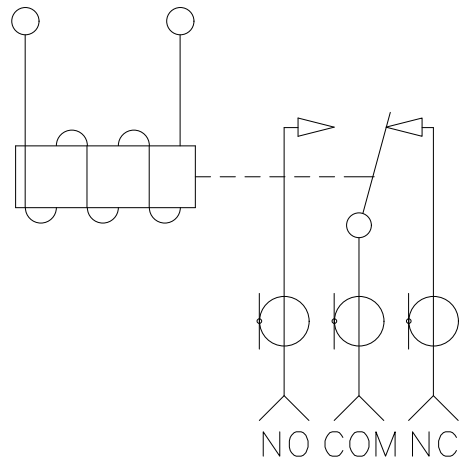



**DowKey®
Microwave**
CORPORATION

The DowKey 64 Series SPDT Transfer Failsafe Relay provides an enclosed actuator for use in environments where dust or moisture may be encountered.

Typical applications for the 64 Series include:

- ILS Air Traffic Control Equipment
- UHF/UHF Standby Transmitters and Receivers



**DowKey® 64 Series
Transfer Relay**

Specifications :

- Operating Voltage:**
(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)
- Coil Current (Nominal):**
12 Vdc 255 mA
28 Vdc 112 mA
- Operate Time:**
20 mS maximum
- Operating Temperature:**
-25°C to +65°C
- Mechanical Life, Cycles:**
1 x 10⁶ minimum
- Nominal Weight:**
7.0 oz., (198g.)


RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
0-0.5	1.10	30	0.10	150-100
0.5-1.5	1.20	25	0.20	100-50
1.5-3.0	1.40	20	0.40	50-25


Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Failsafe Standard Transfer
12 Vdc	N	64-2201
28 Vdc	N	64-2301

Mechanical

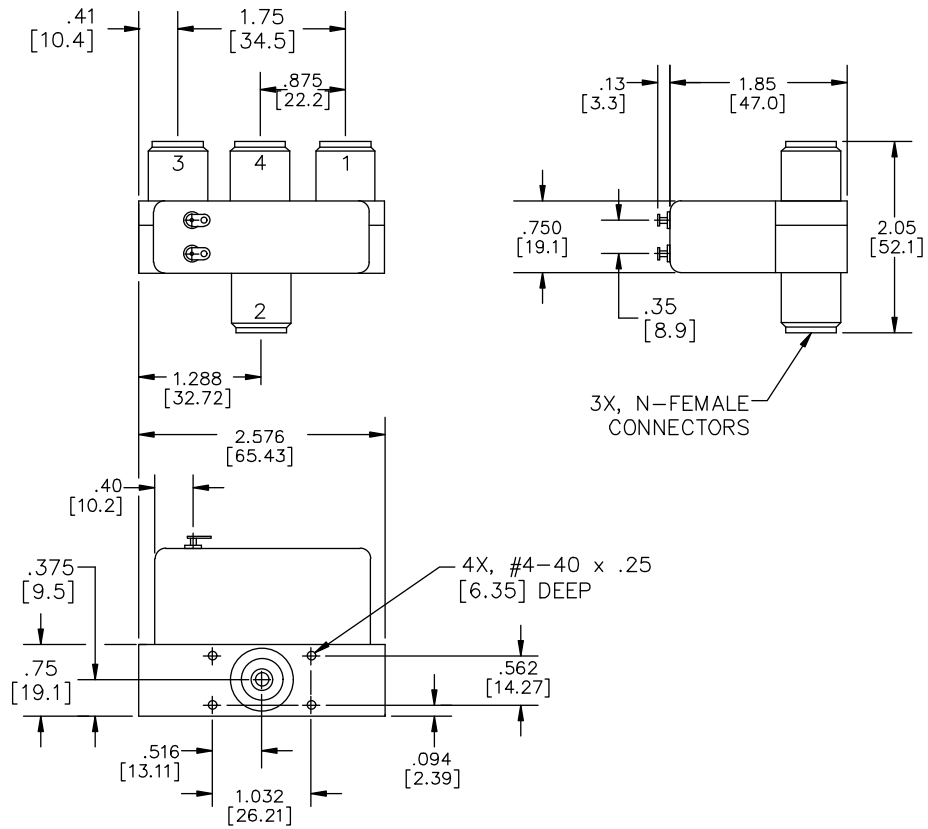


Electrical

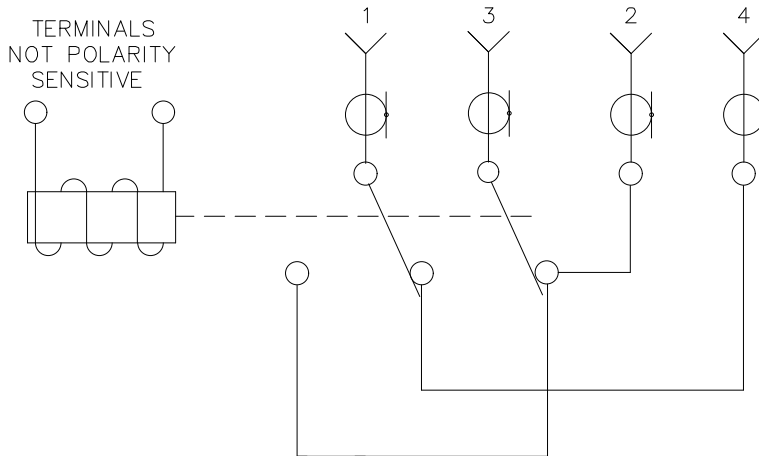

SHOWN IN DE-ENERGIZED POSITION



**DowKey®
Microwave**
CORPORATION

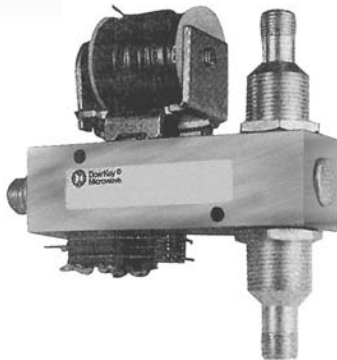

**DowKey® 66 Series
SPDT Switch**

Specifications :

Operating Voltage:

(across temperature range)
12 Vdc (11-14 Vdc)
26.5 Vdc (24-32 Vdc)

Coil Current (Nominal):

12 Vdc 265 mA
26.5 Vdc 150 mA

Operate Time:

25 mS maximum

Operating Temperature:

0°C to +65°C

Mechanical Life, Cycles:

1 x 10⁶ minimum

Nominal Weight:

10.0 oz., (283g.)

The DowKey 66 Series switch was developed to meet high isolation switching requirements of the cable television industry. Isolation of greater than 90 dB is achieved up to 500 MHz through the unique 75 Ohm connectors, which have a double break design to completely isolate the unused input from the RF cavity, leaving the input lead open (not grounded). The relay is designed for baseband video source switching, using the auxiliary contacts for audio signals. The 66 Series can be used for a variety of studio switching applications, eliminating the need to stock more than one type of relay.

Typical applications for the 66 Series include:

- IF Switching
- UHF/VHF Channel Switching
- Studio or Cable Head-End
- Video Source Selection

RF Characteristics


Frequency MHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
50	1.05	100	0.04	100
100	1.10	100	0.06	100
300	1.30	95	0.10	40
500	1.65	90	0.20	20

Connectors and Part Numbers


Nominal Coil Voltage	Connector Type	Standard SPDT	SPDT with 2 "C" Contacts
12 Vdc	F*	66-2272	66-227242
26.5 Vdc	F*	66-2372	66-237242

* Not recommended for use with RG-6 cable.

Mechanical

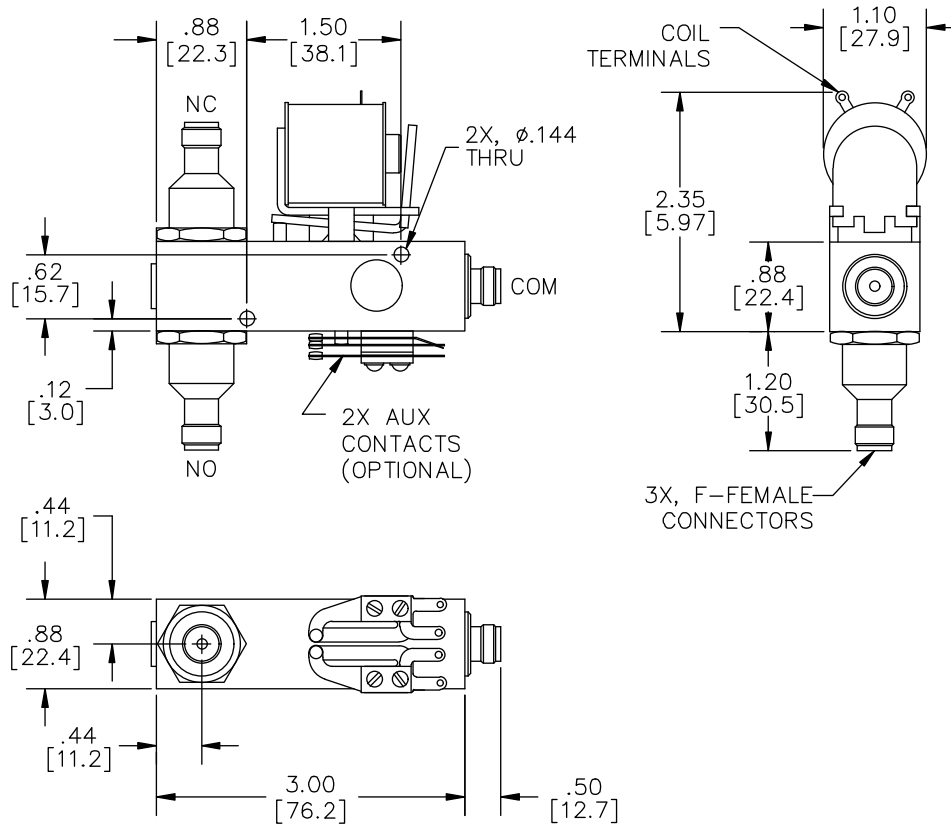


Electrical

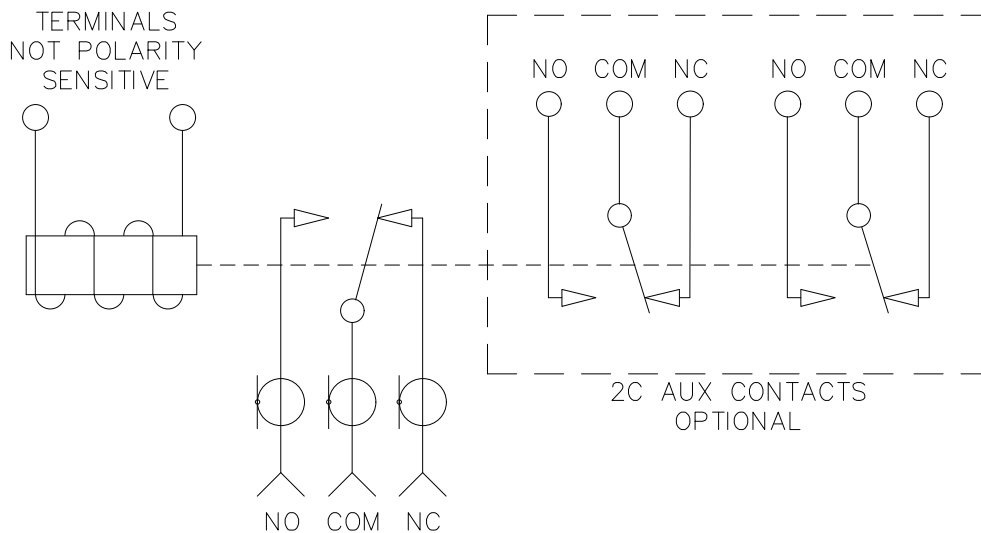



**DowKey®
Microwave**
CORPORATION

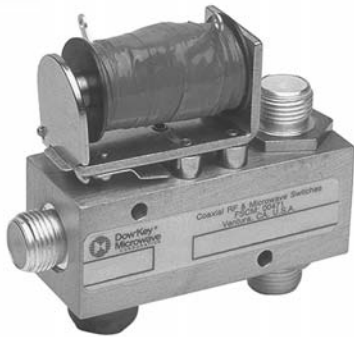

**DowKey® 77 Series
SPDT Switch**

These medium size, light-weight relays are designed and manufactured with gold plated RF contacts and silver plated outer conductors which give good RF performance to 1 GHz (Isolation is greater than 30 dB, Insertion loss is less than 0.15 dB). Available with either 50 Ohm BNC connectors or 75 Ohm type "F" connectors, the "T" shaped configuration has the common connector at one end of the RF cavity block and the N/O and N/C connectors 180° apart on the opposite end. Other options include type TNC connectors.

Typical applications for the 77 Series include:

- Military Communications
- Commercial and Industrial Communications
- CATV/MATV/CCTV Switching

Specifications :

Operating Voltage:
(across temperature range)
12 Vdc (11-14 Vdc)
26.5 Vdc (24-32 Vdc)

Coil Current (Nominal):
12 Vdc 171 mA
28 Vdc 96 mA

Operate Time:
35 mS maximum

Operating Temperature:
0°C to +65°C

Mechanical Life, Cycles:
1 x 10⁶ minimum

Nominal Weight:
3.5 oz., (99g.)

RF Characteristics



Frequency MHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
50	1.05	50	0.03	150
100	1.10	45	0.04	100
400	1.20	40	0.10	75
1,000	1.50	30	0.15	50

Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Standard SPDT	SPDT wit 1 "C" Aux. Contact
12 Vdc	BNC	77-2202	77-220232
26.5 Vdc	BNC	77-2302	77-230232
115 Vac	BNC	77-2602	77-260232
12 Vdc	F*	77-2232	77-227242
26.5 Vdc	F*	77-2332	77-237242
115 Vac	F*	77-2632	77-263242


* Not recommended for use with RG-6 cable.

Mechanical

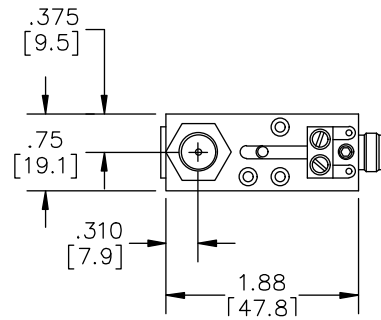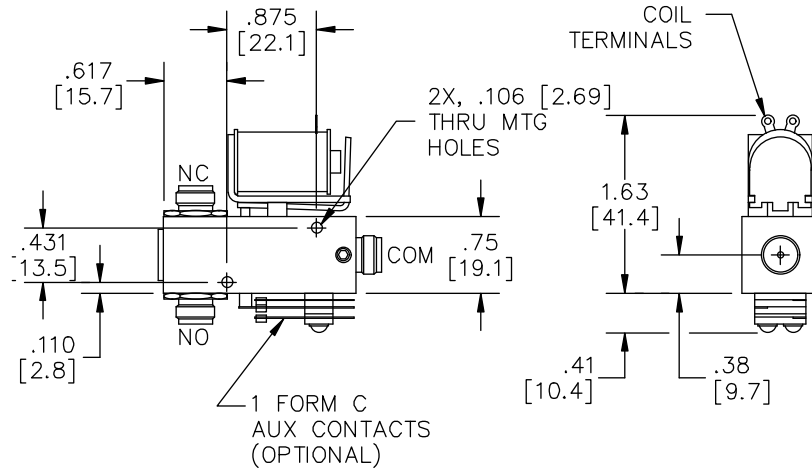

CONN.	TYPICAL CONNECTOR LENGTHS		
	BNC 02	TNC 03	F 32 (SHOWN)
NC	.50 [12.7]	.50 [12.7]	.30 [7.62]
NO	.50 [12.7]	.50 [12.7]	.30 [7.62]
COM	.50 [12.7]	.50 [12.7]	.20 [5.08]

Electrical

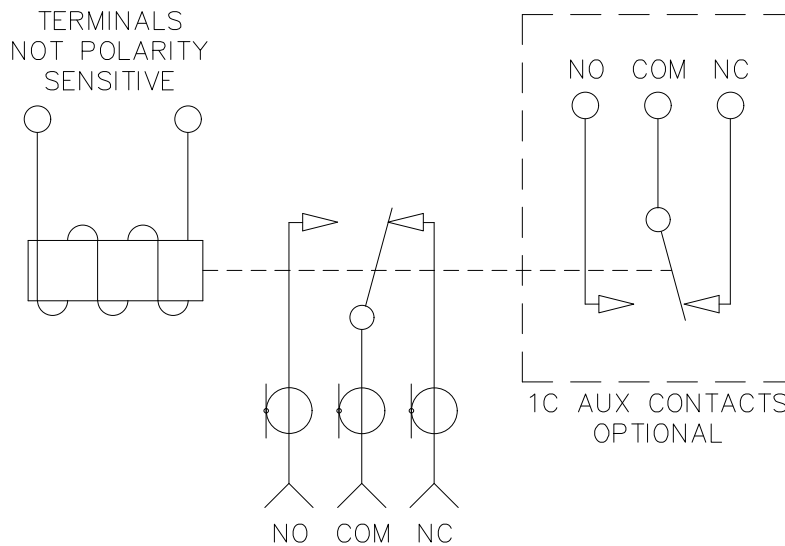



**DowKey®
Microwave**
CORPORATION



DowKey® 78 Series Manual Multithrow Switch

Specifications :

Operating Temperature:
0°C to +65°C

Normal Weight:
10.0 oz., (283g.)

These DowKey manually operated switches are constructed with coaxial switching members rather than wafer switches. They are offered in SPDT, DPDT, SP3T, SP4T, and SP6T configurations, with the unused ports open (non-grounding). With RF power handling capabilities of 1 KW at 50 MHz and 60 dB isolation, the relay is ideal for use in low frequency, high power situations where signal integrity is a critical parameter and switching time of less importance.

Typical applications for the 78 Series include:

- Military/Commercial RF Communications
- Laboratory Test Equipment
- Video Viewing "Carrell" or Audition Room Source Selection
- Patch Panels


RF Characteristics

Frequency MHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
50	1.10	60	0.03	1,000
100	1.15	55	0.05	1,000
225	1.25	45	0.10	600
450	1.45	40	0.15	450

Connectors and Part Numbers

Connector Type	SPDT	DPDT	SP3T	SP4T	SP6T
N	78-0201	78-0701	78-0301	78-0401	78-0601
BNC	78-0202	78-0702	78-0302	78-0402	78-0602
UHF	78-0204	78-0704	78-0304	78-0404	78-0604

Mechanical

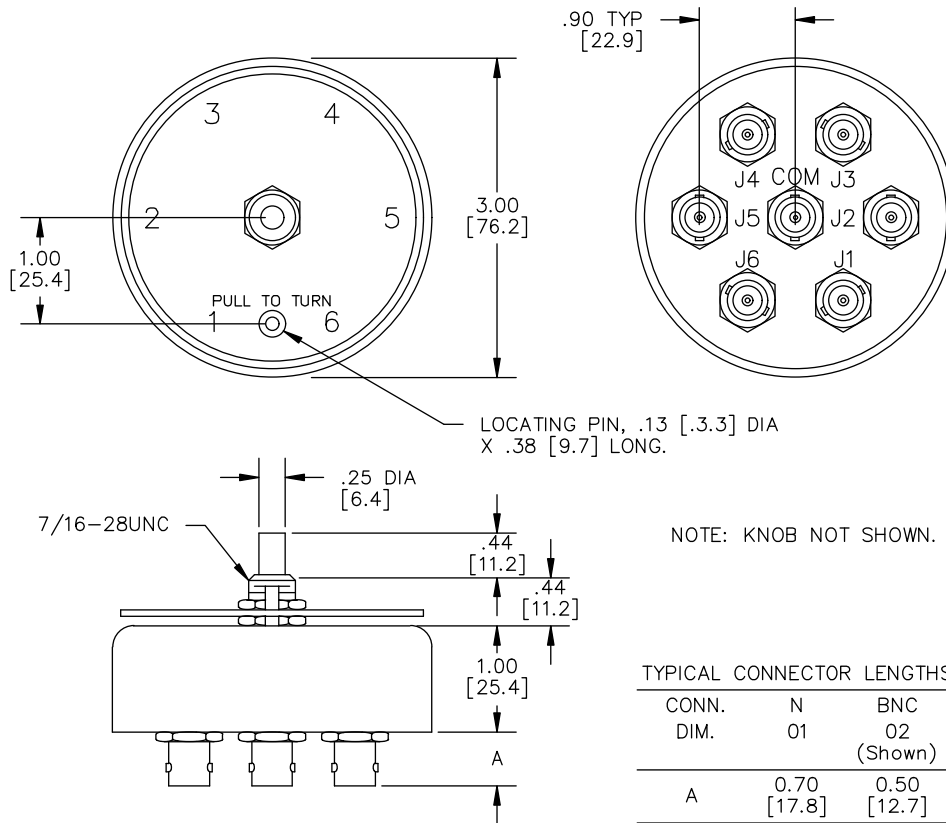

Electrical

CONNECTOR LOCATIONS

SWITCH TYPE	CONNECTORS USED	ROTATIONAL STOPS
SPDT	J3, J4, C	YES
SP3T	J1, J3, J5, C	NO
SP4T	J1, J2, J3, J4, C	YES
SP6T	J1, J2, J3, J4, J5, J6, C	NO
DPDT	J1, J2, J3, J4, J5, J6	YES




**DowKey®
Microwave**
CORPORATION

The DowKey Microwave 79 Series bypass relays offer superior RF performance and an economical alternative to microwave transfer switches in applications to 3 GHz.

Typical applications for the 79 Series include:

- Amplifier Bypass
- Power Monitor Circuit
- Switch/Filter

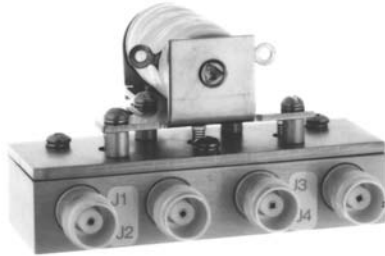

**DowKey® 79 Series
Bypass Switches**

Specifications :

Operating Voltage:

(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)

Coil Current (Nominal):

12 Vdc 300 mA
28 Vdc 258 mA

Operate Time:

35 mS maximum

Operating Temperature:

0°C to +65°C

Mechanical Life, Cycles:

1 x 10⁶ minimum

Nominal Weight:

7.0 oz., (200g.)


RF Characteristics

Frequency GHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
0-1	1.10	80	0.05	500-200
1-2	1.15	70	0.10	200-100
2-3	1.25	60	0.20	100-50


Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Failsafe Standard
12 Vdc	TNC	79-2203
28 Vdc	TNC	79-2303

Mechanical

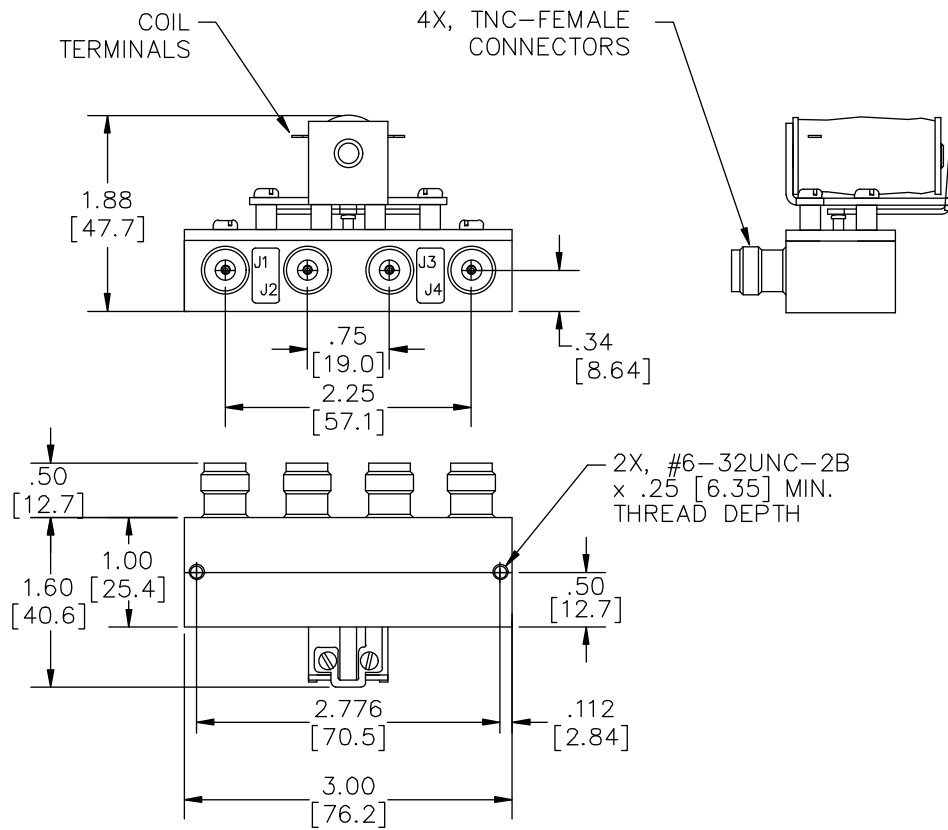


Electrical

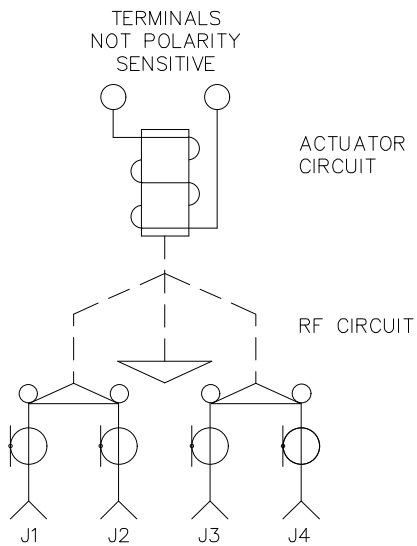



**DowKey®
Microwave**
CORPORATION



**DowKey® 116 Series
SP4T Switch**

Specifications :

Operating Voltage:

(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)

Coil Current (Nominal):

12 Vdc 380 mA
28 Vdc 96 mA

Operate Time:

25 mS maximum

Operating Temperature:

0°C to +65°C

Mechanical Life, Cycles:

1 x 10⁶ minimum

Nominal Weight:

12..0 oz., (340g.)

The DowKey 116 Series are small multiple-position switches designed for applications where one or more inputs or outputs are required to be connected simultaneously. Each position has its own actuating solenoid, and each port may be grounded or non-grounded in the de-energized state. RF performance is excellent and remains stable to approximately 3 GHz. Grounding the unused positions increases isolation.

Typical applications for the 116 Series include:

- Military Communications Equipment
- Multiple Video Monitor Switching
- Multiple Test Monitor Switching


RF Characteristics

Frequency MHz	VSWR (max)	Isolation Grounding dB (min)	Isolation Non-Grounding dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
50	1.02	60	45	0.02	200
100	1.02	55	40	0.03	200
400	1.05	50	35	0.05	100
1,000	1.10	35	25	0.10	65
2,000	1.20	30	20	0.15	45


Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	SP4T Grounding	SP4T Non-Grounding
12 Vdc	N	116-220101	116-220102
28 Vdc	N	116-230101	116-230102
12 Vdc	BNC	116-220201	116-220202
28 Vdc	BNC	116-230201	116-230202
12 Vdc	TNC	116-220301	116-220302
28 Vdc	TNC	116-230301	116-230302

Mechanical

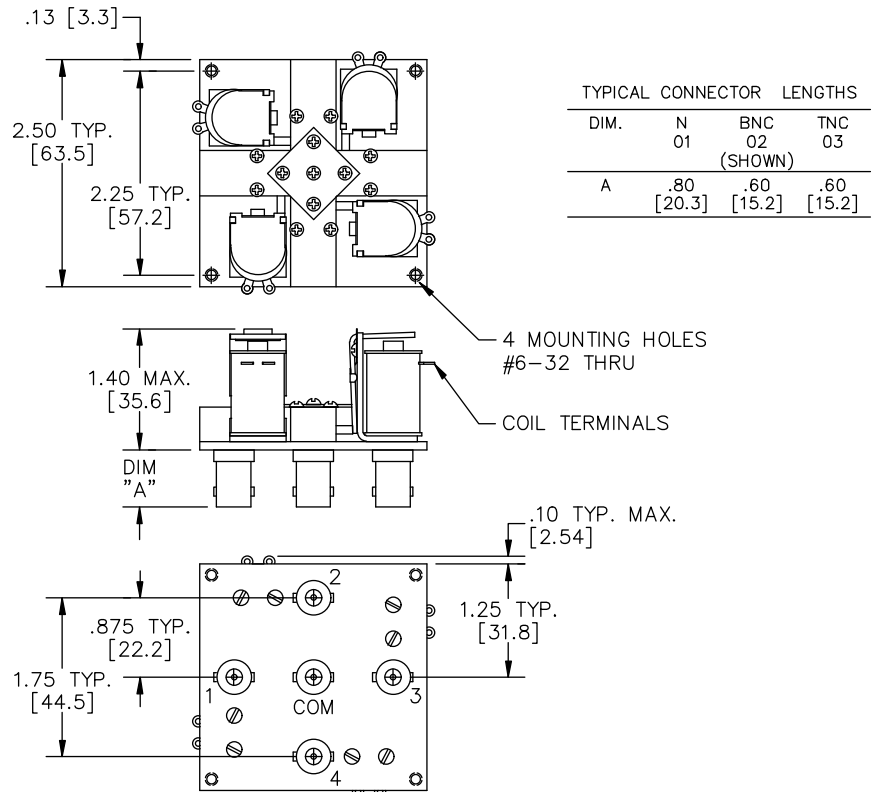

Electrical

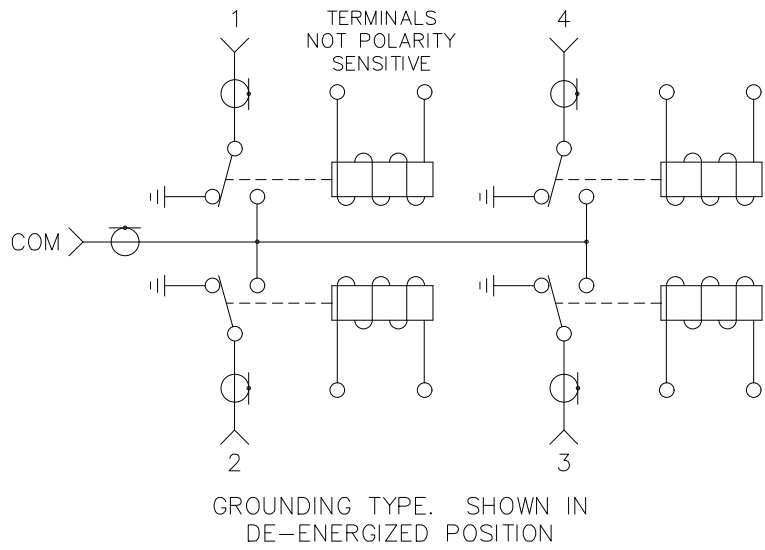



**DowKey®
Microwave**
CORPORATION

The DowKey 164 Series has all connectors and the actuator assembly mounted on the same plane so that the switch can be flush-mounted on a panel or cabinet wall. With good performance to 1 GHz, these switches have numerous general purpose uses.

Typical applications for the 164 Series include:

- Military Communications
- Test Equipment
- Magnetic Resonance Imaging Equipment
- Video and RF Switching



**DowKey® 164 Series
SPDT Switch**

Specifications :

- Operating Voltage:**
(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)
- Coil Current (Nominal):**
12 Vdc 172 mA
28 Vdc 96 mA
- Operate Time:**
20 mS maximum
- Operating Temperature:**
0°C to +65°C
- Mechanical Life, Cycles:**
1 x 10⁶ minimum
- Nominal Weight:**
4.5 oz., (127g.)


RF Characteristics

Frequency MHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
0-50	1.03	50	0.03	150
50-100	1.05	50	0.04	150-125
100-200	1.07	45	0.05	125-100
200-400	1.12	40	0.10	100-75
400-1,000	1.20	30	0.15	75-50

Connectors and Part Numbers


Nominal Coil Voltage	Connector Type	164 Series
12 Vdc	BNC	164-2202
28 Vdc	BNC	164-2302
115 Vac	BNC	164-2602
12 Vdc	TNC	164-2203
28 Vdc	TNC	164-2303
115 Vac	TNC	164-2603

Mechanical

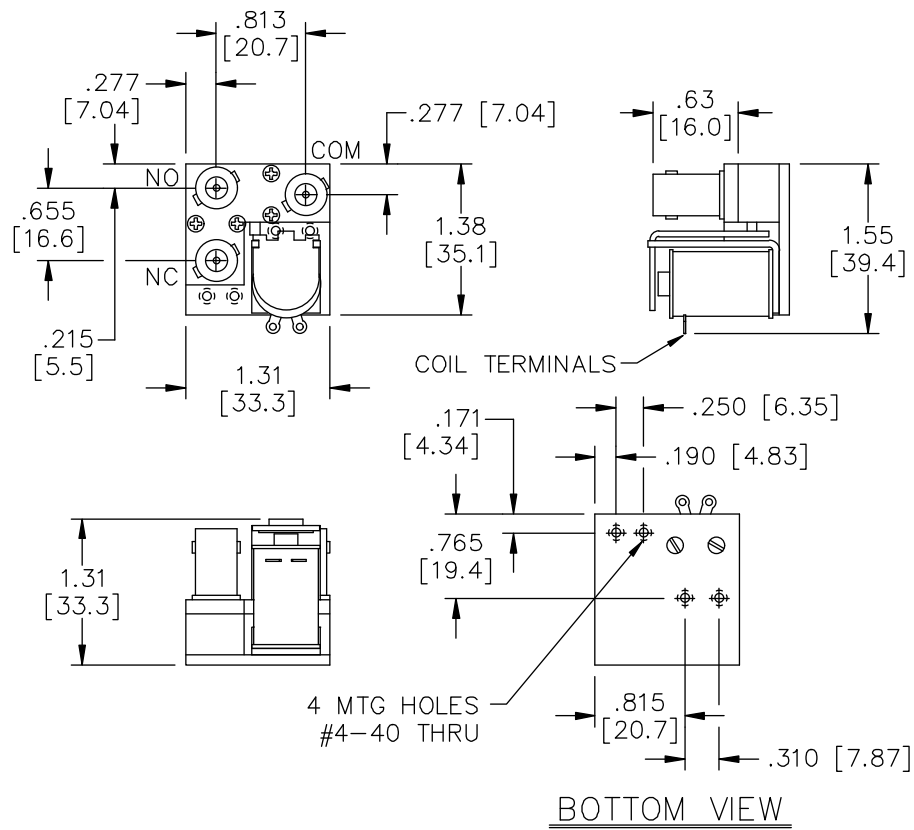

Electrical

TERMINALS
NOT POLARITY
SENSITIVE

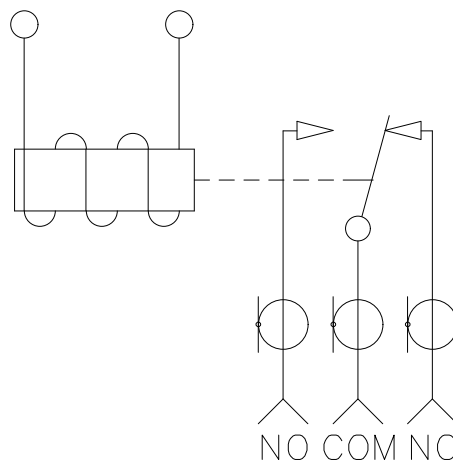



**DowKey®
Microwave**
CORPORATION

The DowKey 167 Series transfer relay is designed for high power operation, and is capable of handling up to 2 kilowatts at 30 MHz. The switch has two coils which can be operated in parallel for break before make transfer. When the coils are operated separately, make before break switching can be accomplished to either 2 or 4. All models have a DPDT set of auxiliary contacts.



DowKey® 167 Series Transfer Switches

Specifications :

- Operating Voltage:**
(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)
- Coil Current (Nominal):**
12 Vdc 171 mA
28 Vdc 96 mA
- Operate Time:**
25 mS maximum
- Operating Temperature:**
0°C to +65°C
- Mechanical Life, Cycles:**
1 x 10⁶ minimum
- Nominal Weight:**
12.0 oz., (340g.)

RF Characteristics

Frequency MHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (max)*
0-25	1.05	45	0.04	2,000
25-50	1.05	45	0.05	2,000-1,500
50-100	1.08	40	0.06	1,500-1,000
100-300	1.12	30	0.08	1,000-600
300-500	1.15	25	0.10	600-450
500-1,000	1.50	20	0.50	400-300


*Power ratings shown are for cold switching. RF power must be removed prior to the switching cycle.

Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Part Number
12 Vdc	N	167-220142
28 Vdc	N	167-230142
115 Vac	N	167-260142
12 Vdc	UHF**	167-220442
28 Vdc	UHF**	167-230442
115 Vac	UHF**	167-260442

** Not recommended for applications above 300 MHz.


Mechanical

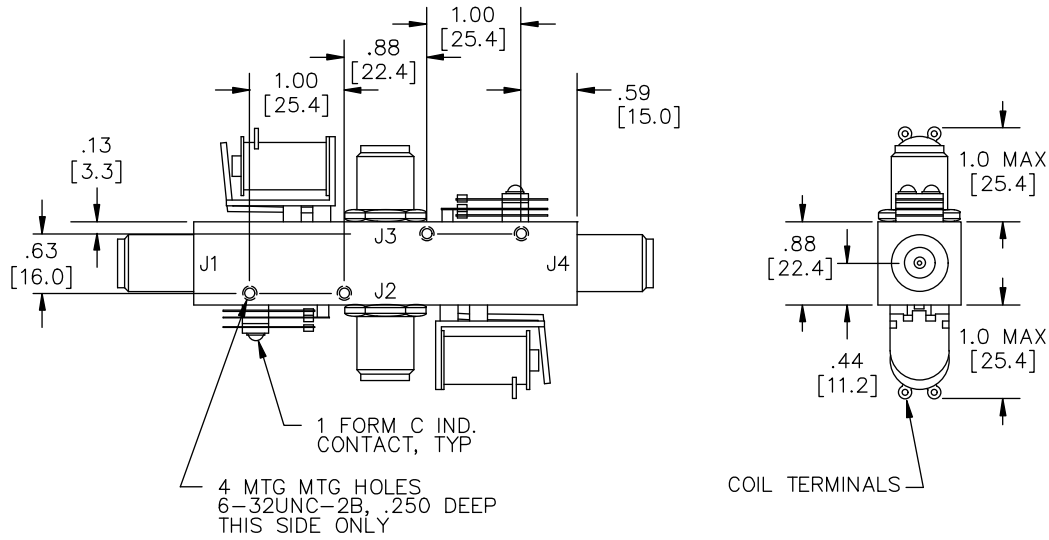

TYPICAL CONNECTOR LENGTHS

CONN. DIM.	N 01 (Shown)	UHF 04
J1, J4	0.60 [16.0]	0.60 [16.0]
J2, J3	0.70 [17.8]	0.70 [17.8]

Electrical

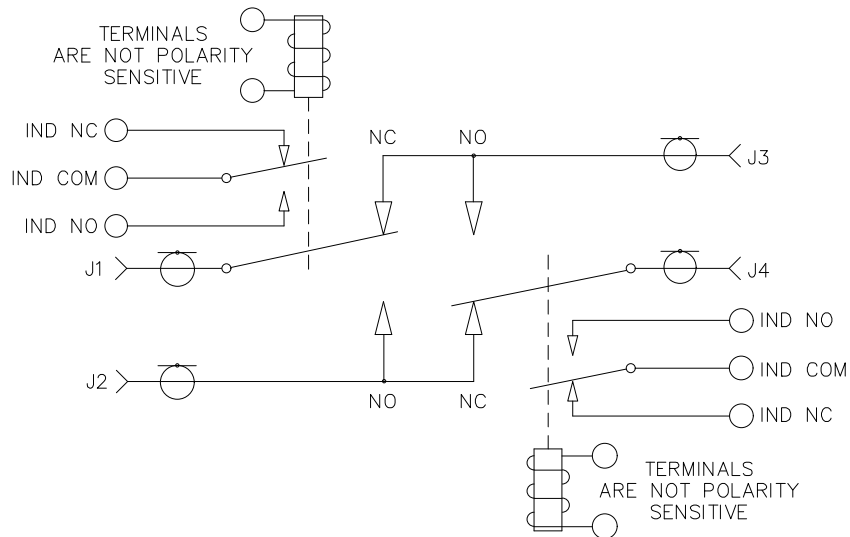



**DowKey®
Microwave**
CORPORATION

The DowKey 169 Series SPDT switch is the smallest of the DowKey coaxial RF relays. The switch is manufactured with gold plated contacts to provide reliable RF performance to 1 GHz.

Typical applications for the 169 Series include:

- Military Communications
- Commercial Radio
- Transmit/Receive Switching
- Antenna Switching
- Conditions where size and weight are critical parameters



**DowKey® 169 Series
SPDT Switch**

Specifications :

Operating Voltage:
(across temperature range)
12 Vdc (11-14 Vdc)
28 Vdc (24-32 Vdc)

Coil Current (Nominal):
12 Vdc 171 mA
28 Vdc 96 mA

Operate Time:
20 mS maximum

Operating Temperature:
0°C to +65°C

Mechanical Life, Cycles:
1 x 10⁶ minimum

Nominal Weight:
4.5 oz., (125g.)


RF Characteristics

Frequency MHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (max)
50	1.03	50	0.03	150
100	1.06	50	0.05	100
400	1.12	45	0.10	75
1,000	1.25	35	0.15	50
2,000	1.50	30	0.30	25


Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Part Number
12 Vdc	BNC	169-2203
28 Vdc	BNC	169-2302

Mechanical

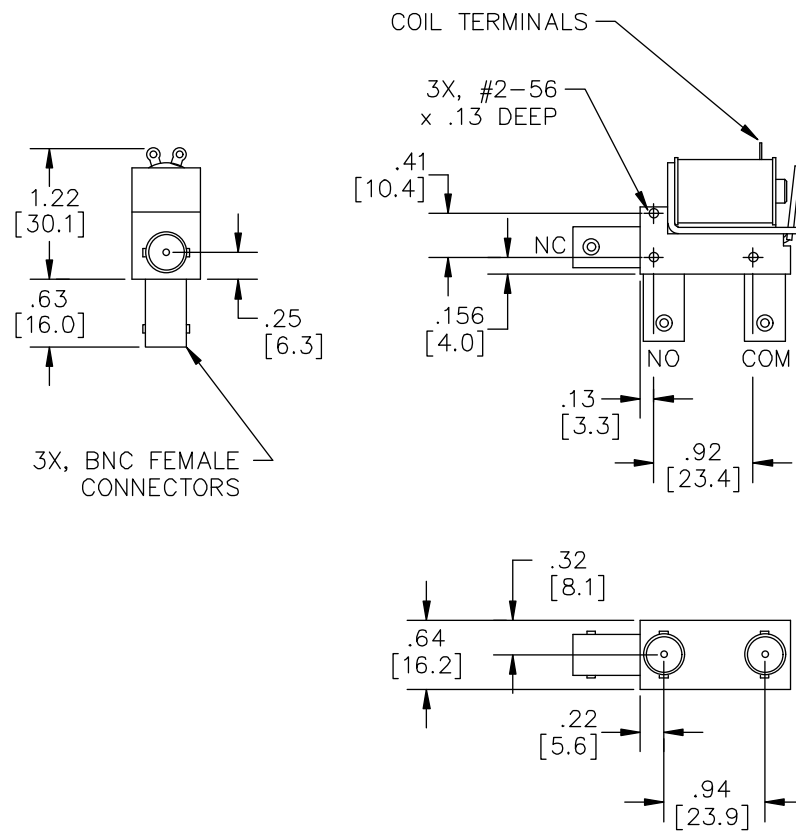

Electrical

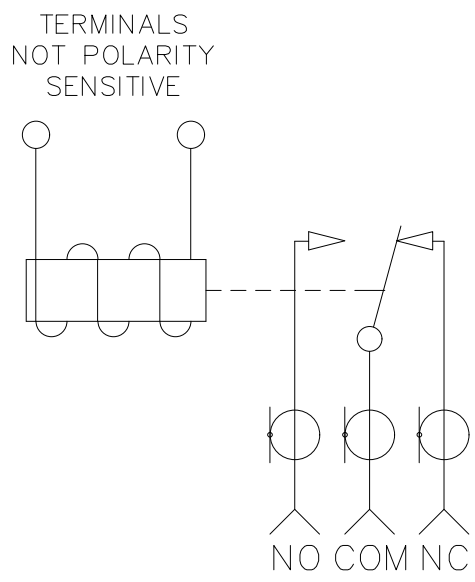



**DowKey®
Microwave**
CORPORATION

The DowKey 260 Series is a standard DPDT switch with six connectors, allowing two of four straight-through paths from two inputs. The 260B is identical in construction, except that there is an internal connection between the N/C contacts, leaving only four connectors. The 260B Series is widely used to insert or by-pass a circuit element (such as an amplifier or filter) in a transmission path between two normally connected elements. Both are available with a choice of actuator coils, connector options, and a pair of form "C" auxiliary contacts.



Typical applications for the 260 & 260B Series include:

- Inserting a Linear Amplifier Between an Exciter and an Antenna
- Filter, Attenuator, or Amplifier By-Pass Switching
- Insert Filters or Attenuators in a Transmission Path
- Dual Simultaneous Transmit/Receive or Antenna Switching

**DowKey® 260 Series DPDT &
260B Series
By-Pass Switch**

Specifications :

Operating Voltage:
(across temperature range)
12 Vdc (11-14 Vdc)
26.5 Vdc (24-32 Vdc)

Coil Current (Nominal):
12 Vdc 250 mA
26.5 Vdc 110 mA

Operate Time:
25 mS maximum

Operating Temperature:
0°C to +65°C

Mechanical Life, Cycles:
1 x 10⁶ minimum

Nominal Weight:
12..0 oz., (340g.)

RF Characteristics



Frequency MHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (max)
0-50	1.05	40	0.04	1,000
50-100	1.08	35	0.05	1,000
100-400	1.15	25	0.10	1,000-500
400-1,000	1.20	18	0.15	500-350

Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	DPDT	with 2 "C" Ind. Contacts	By-Pass	with 2 "C" Ind. Contacts
12 Vdc	N	260-2201	260-220142	260B-2201	260B-220142
26.5 Vdc	N	260-2301	260-230142	260B-2301	260B-230142
115 Vac	N	260-2601	260-260142	260B-2601	260B-260142
12 Vdc	BNC	260-2202	260-220242	260B-2202	260B-220242
26.5 Vdc	BNC	260-2302	260-220242	260B-2202	260B-220242
115 Vac	BNC	260-2602	260-220242	260B-2202	260B-220242
12 Vdc	UHF*	260-2204	260-220442	260B-2204	260B-220442
26.5 Vdc	UHF*	260-2304	260-230442	260B-2304	260B-230442
115 Vac	UHF*	260-2604	260-260442	260B-2604	260B-260442

*Not recommended for applications above 300 MHz.


Mechanical

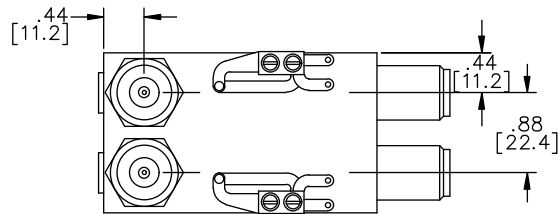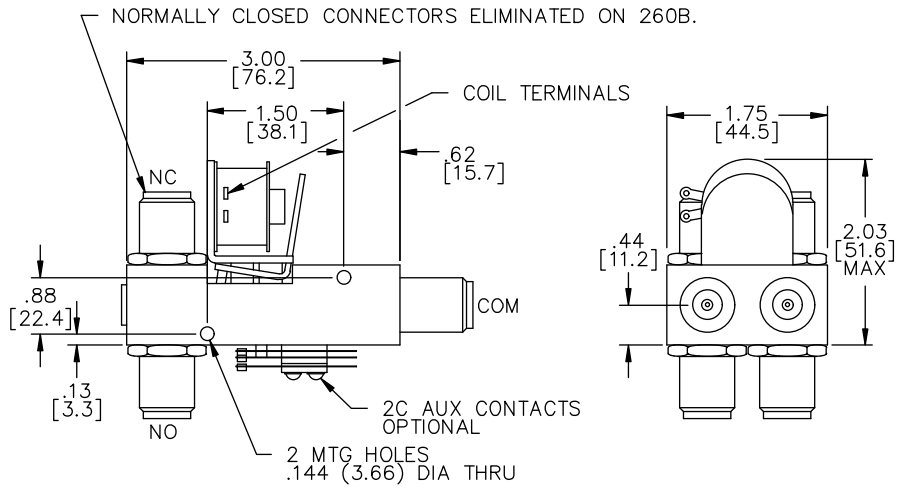

TYPICAL CONNECTOR LENGTHS

CONN. DIM.	N 01	UHF 04	BNC 02
(Shown)			
COM.	0.50 [12.7]	0.50 [12.7]	0.70 [17.8]
NC, NO	0.70 [17.8]	0.70 [17.8]	0.60 [15.2]


Electrical

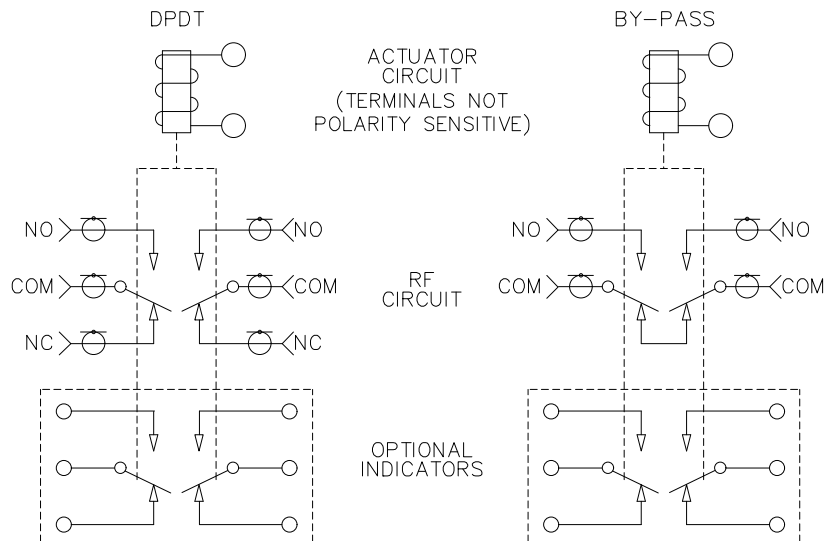

310 Series SPDT High Power Vacuum Coaxial Switch



**DowKey®
Microwave**
CORPORATION

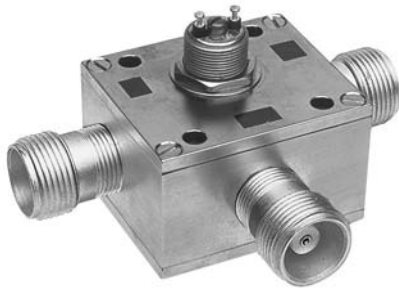

DowKey® 310 Series SPDT Switch

Specifications :

Operating Voltage:

(across temperature range)

12 Vdc (11-14 Vdc)

28 Vdc (24-32 Vdc)

Coil Current (Nominal):

12 Vdc 150 mA

28 Vdc 84 mA

Switching Time:

8 mS maximum

Operating Temperature:

-25°C to +65°C

Mechanical Life, Cycles:

1 x 10⁶ minimum

Nominal Weight:

9.0 oz., (260g.)

The DowKey 310 Series SPDT relays have high power handling capability in a small package. The ability to handle up to 3 KW at low frequencies (up to 30 MHz) is achieved with vacuum-enclosed contacts, minimizing noise and losses. This rugged switch is capable of "hot" switching 1 KW at 30 MHz with the optional special Tungsten-Molybdenum contacts to avoid pitting when switched with RF power applied. (It should be noted that even with heavy-duty construction, hot-switching will reduce the typical operational life of 1,000,000 cycles significantly - to approximately 10,000 cycles)

Typical applications for the 310 Series include:

- High Power Transmitter Switching
- Radar Pulse Forming Networks
- Phased Array Antenna Systems
- UHF/VHF Communications Systems
- Magnetic Resonance Imaging Systems


RF Characteristics

Frequency MHz	VSWR (max)	Isolation dB (min)	Ins. Loss dB (max)	RF Power Watts (CW)
30	1.05	35	0.07	3,000
50	1.06	30	0.08	2,300
100	1.08	25	0.09	2,000
400	1.10	17	0.10	850


Connectors and Part Numbers

Nominal Coil Voltage	Connector Type	Part Number
12 Vdc	N	310-2201
28 Vdc	N	310-2301
115 Vac	N	310-2601
12 Vdc	HN	310-2251
28 Vdc	HN	310-2351
115 Vac	HN	310-2651
12 Vdc	SC	310-2253
28 Vdc	SC	310-2353
115 Vac	SC	310-2653

Mechanical

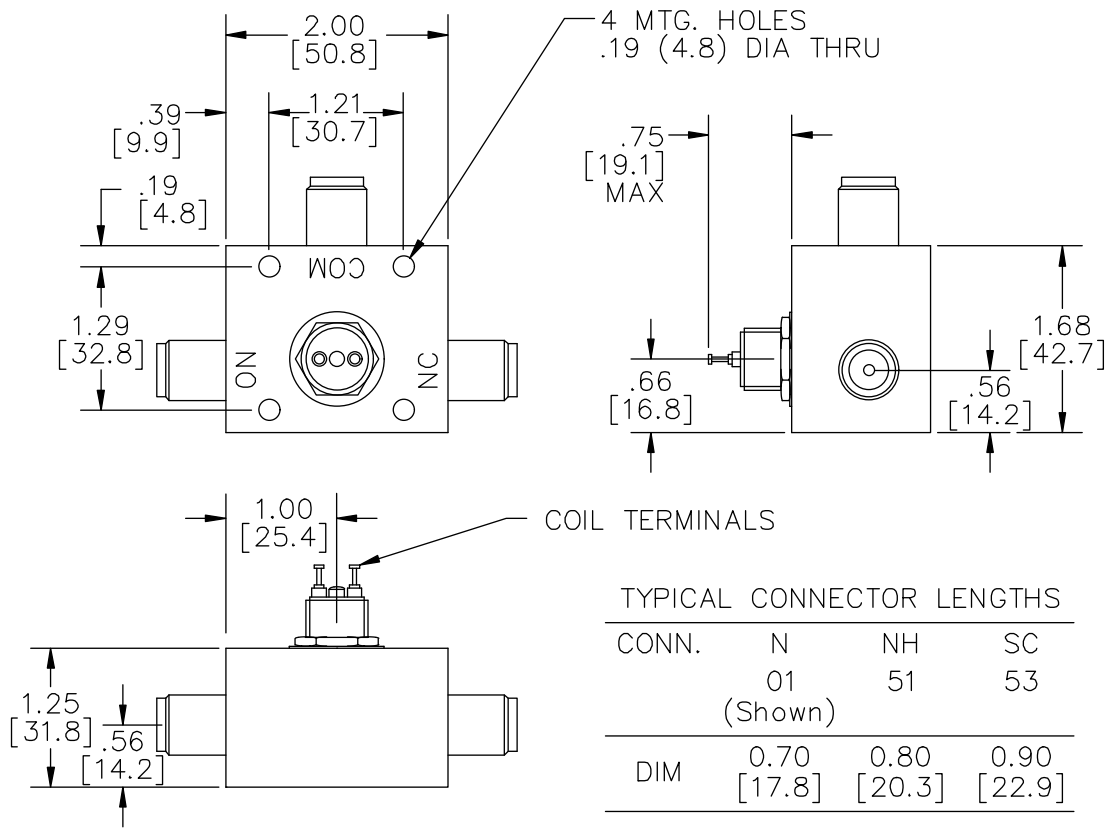

Electrical

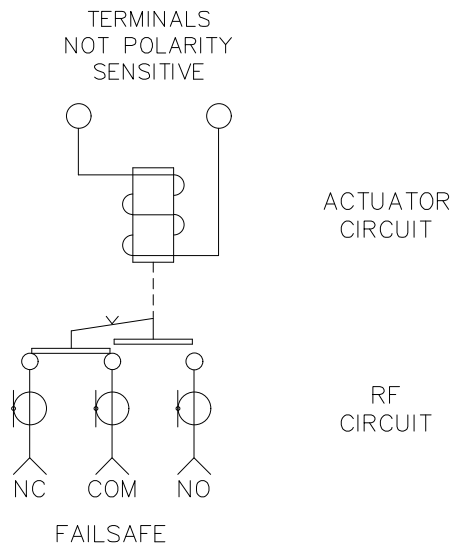



DowKey/TRANSCO

Standard RF, Microwave and Waveguide Switches

Cross Reference Guide

TRANSCO PART NUMBERS AND FEDERAL STOCK NUMBERS PER MIL S 3928

<u>Slash No.</u>	<u>Option No.</u>	<u>TPI Part No.</u>	<u>FSN 5985-</u>
MIL-S-3928/7-	-01	C6N2A1	-
	-02	CON2AB	552-9040
	-03	C4N2AB	548-3715
	-04	C6N3A1	-
	-05	C4N3AB	539-6133
	-06	CON6AB	754-9860
	-07	C4N6AB	989-5364
	-08	C6N6A1	-
	-09	11600	-
	-10	13300	783-5769
	-12	CON3AB	-
	-17	11300	504-8506
	-18	11100	557-5208
	-19	11400	-
	-20	11200	557-5721
	-21	11800	586-7023
	-22	CON4AB	448-0300
	-24	14100	501-1886
	-25	300C00100	-
	-26	300C00200	241-3503

MIL-S-3928/9-	-01	1460-820	518-0832
	-04	M1460-H22	401-2883
	-05	M1460-H20	439-5691
	-06	1460-20-95	512-5297
	-07	1460-3-96	296-5334
	-08	1460-6-96	813-0833
	-09	1460-830-95	-
	-10	1460-22-95	-
	-11	1460-822	296-6729
	-12	1460-6	504-6639
	-13	M1460-H30	01-097-3720
	-14	M1460-HA3	01-118-8463
	-15	M1460-HA6	763-3823

<u>Slash</u>	<u>No.Option</u>	<u>No.TPI Part</u>	<u>No.FSN 5985</u>	
MIL-S-3928/10-	-04	810C00100	272-7325 123-8438*	
	-05	810C00200	433-6758 01-017-5236*	
	-06	810C05200	-	
	-07	315C05200	-	
	-08	310C00200	246-9414	
	-09	810C00300	009-3691-0	
	-09	810C00300	617-2436	
	-10	300C00200	241-3503	
	MIL-S-3928/15-	-01	919C70100	477-0060* 433-8301
		-06	900C70100	155-0122
-07		909C7010	150-8559	
-08		909C70200	022-9059	
-09		919C72700	-	
-10		919C70200	621-6997	
-01		919C70100-8	01-043-0781	
-07		909C70100-8	01-092-9506	
-08		909C70200-8	022-9059	
-10		919C70200-8	00-150-8559	
MIL-S-3928/17-		-02	144C70100	01-106-0807* 01-042-0669
			144C70600	275-7009
MIL-S-3928/18-	-01	146C70100	172-8187 01-086-0592*	
	-02	146C70600	005-2503	
	-01	146C70100-8		
	-02	146C70600-8		
MIL-S-3928/19-	-01	700C70900	009-6619	
	-02	710C70100	125-9895	
	-05	710C71400	-	
	-02	710C70100-8	01-106-3305	
	-05	710C71400-8	625-9681	
MIL-S-3928/20-	-01	820C31700	-	
	-03	810C30900	417-0532	
	-04	910C90700	006-4308	
	-06	900C31500	619-7145	
	-07	810C30100	248-2974 01-116-4495*	
	-08	800C30200	325-6104	
		with diodes	01-021-4686	
MIL-S-3928/21-	-01	700C30200	139-1745 01-100-8860*	
	-02	310C30800	630-6674	
	-03	300C30200	-	

*Multiple federal stock numbers

Coaxial Switch

Type DO

Description

The Type DO Latching SPDT Switch has RF geometry optimized for SMA connectors and operates over a 0-18GHz frequency band. It is magnetically latched and available with or without actuator cut-off circuitry. It is also available with or without indicating switches. DowKey's design mechanically links indicating switches to the rotating armature for positive indication.

Actuator features:

1. Balanced rotating armature
2. Reliable actuation with low current
3. Positive latching with permanent magnets

A single voltage pulse of 20 milliseconds is all that is required to change positions; no holding power is required to maintain a position.

Magnetic latching offers distinct advantages over other mechanisms since it uses no springs or mechanical detents which are prone to fatigue and wear. Transco considers magnetic latching to be the optimum design for applications which require high vibration levels, environmental extremes, long life and reliability.

This switch is part of the Type D family of switches featuring different RF connectors and frequencies.

Type	Conn.	Freq.
D	N & TC	12 GHz
DO	SMA	18 GHz
DX	SC	6 GHz
DO	3 5 mm	26.5GHz

Standard Products

P/N	Schematic
909C70 1 00*	1
909C70200**	2
909C71100	3
909C71200	4

* Meets MIL-S-3928/15-07
 ** Meets MIL-S-3928/15-08

Special Configuration

Actuating Voltage Mounting Configuration
 Transient Circuit Terminal Location
 TTL Logic Circuit


(For dimensions and circuit diagrams see pages 106 and 107)

RF Circuit: SPDT
Actuator: Latching
Connector: SMA
Frequency: 0-18GHz




Schematic


#1. Latching




2. Latching with Indicator

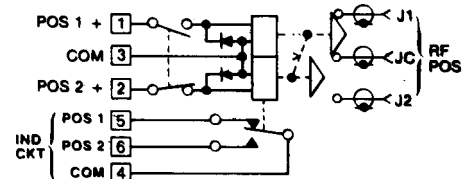


3. Pulse Latching



4. Pulse Latching w/ Indicator



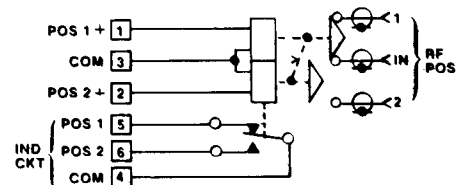


5. Latching w/ Indicator

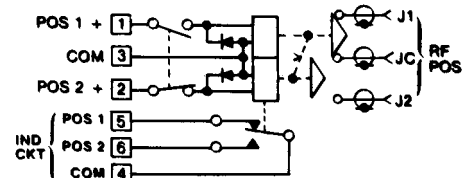


Specifications

Typical RF data of a production switch; computer printouts below:

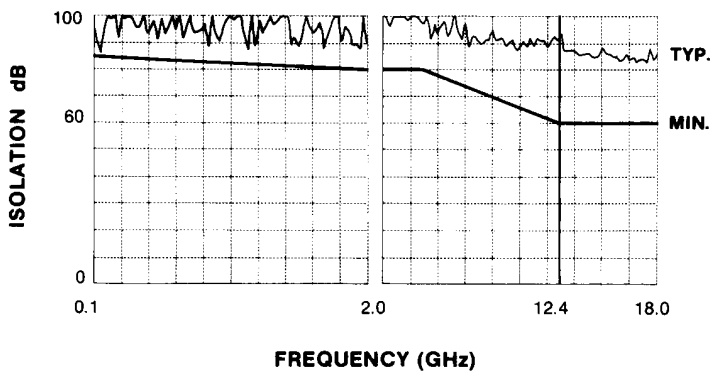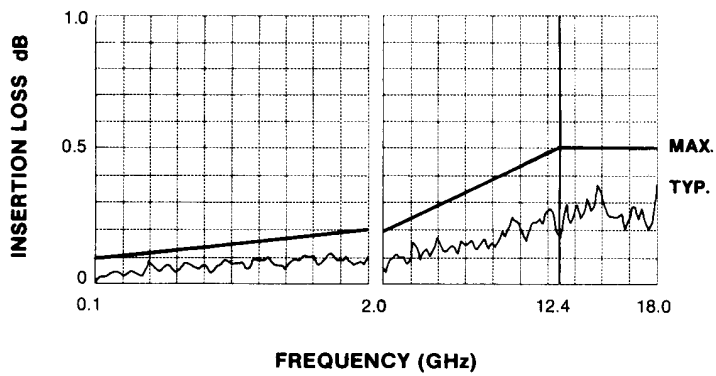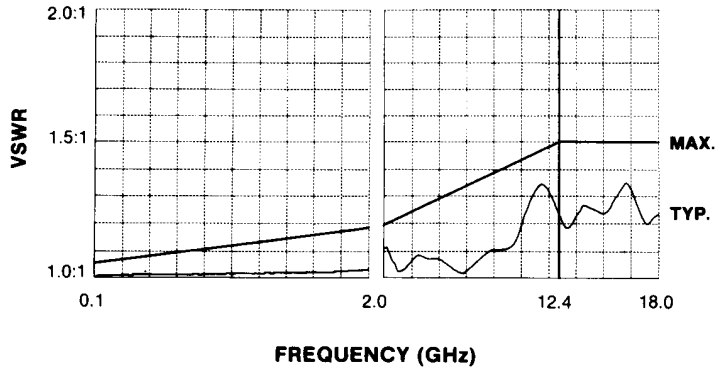

Voltage: 20 to 30Vdc
 Coil Resistance: 310 ± 10 Ohms @ 20°C
 Current: 95mA max @ 28Vdc and 20°C
 Switching Time: 20 milliseconds
 RF Contacts: break-before-make
 Impedance: 50 Ohms nominal
 Temperature: -55°C to 85°C
 Vibration: 20g's sine/random
 Life: 1,000,000 cycles min
 Weight: 909C70100 } 1.5 oz.
 909C71100 }
 909C70200 } 2.0 oz.
 909C71200 }

Dimensions

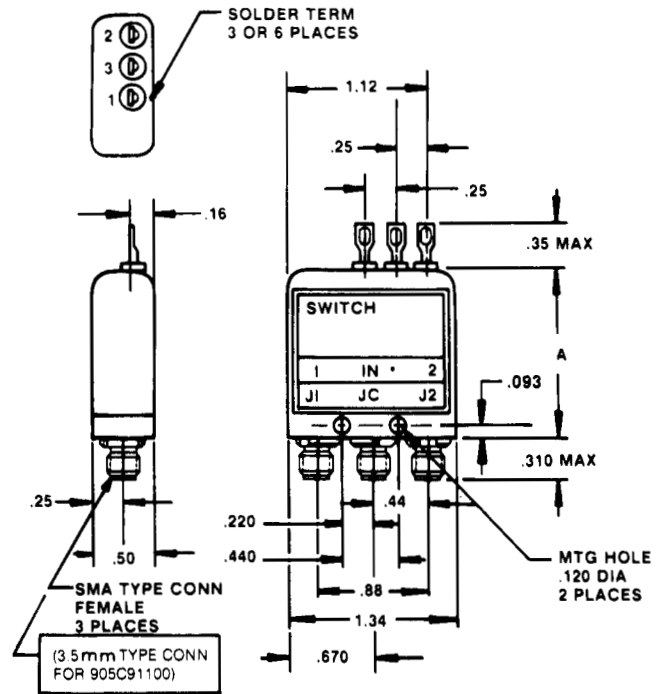

Lower Frequency

At 10MHz, typical values are:

Isolation: 100dB

VSWR: 1.05:1

Insertion Loss: 0.05dB

Because of the inherently good RF performance at lower frequencies, this product line is not tested below 2GHz except upon request.

P/N	A
909C70100	1.30
909C71100	
905C91100	
909C70200	1.50
909C71200	

Coaxial Switch

Type DO

Description

The type DO coaxial switch has RF geometry optimized for SMA connectors and operates over a 0-18GHz frequency band. It is also available with or without indicators. DowKey's design mechanically links indicating switches to the rotating armature for positive indication.

Actuator features:

1. Balanced rotating armature
2. Low current required to develop the actuating torque

This design features a dual magnetic field for high efficiency and long life reliability...also excellent shock/vibration characteristics.

This switch is part of the Type D family of switches featuring different RF connectors and frequencies.

Type	Conn.	Freq.
D	N	12 GHz
DO	SMA	18 GHz
DX	SC	6 GHz

RF Circuit: SPDT
Actuator: Failsafe
Connector: SMA
Frequency: 0-18GHz



Standard Products

P/N	Schematic
919C70100*	1
919C70200**	2

* Meets MIL-S-3928/15-01
 ** Meets MIL-S-3928/15-10


Special Configuration

Actuating Voltage Mounting Configuration
 Transient Circuit Terminal Location
 TTL Logic Circuit

(For dimensions and circuit diagrams see pages 106 and 107)


Schematic

1. Failsafe



ENERGIZE TO CONNECT IN TO 2 (POS 2)
 SHOWN IN FAILSAFE POSITION (POS 1)




2. Failsafe w/ Indicator

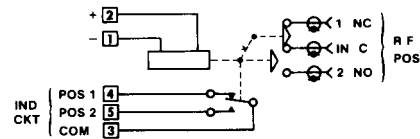

ENERGIZE TO CONNECT IN TO 2 (POS 2)
 SHOWN IN FAILSAFE POSITION (POS 1)

Specifications

Typical RF data of a production switch; computer printouts below:

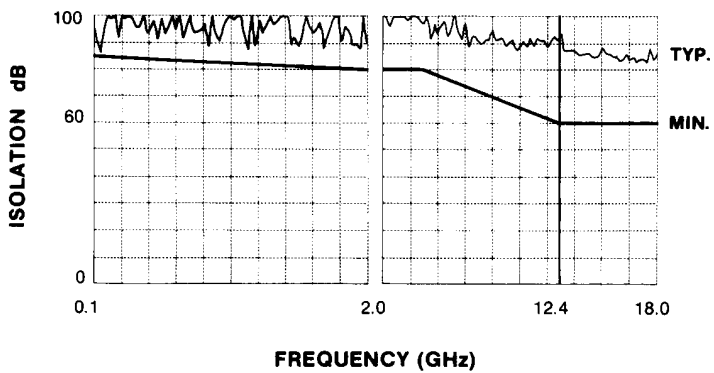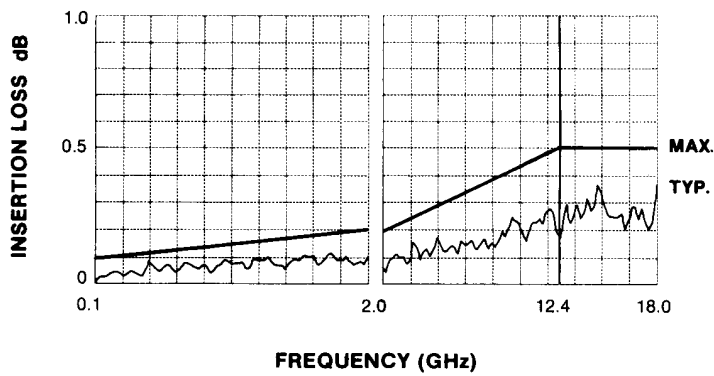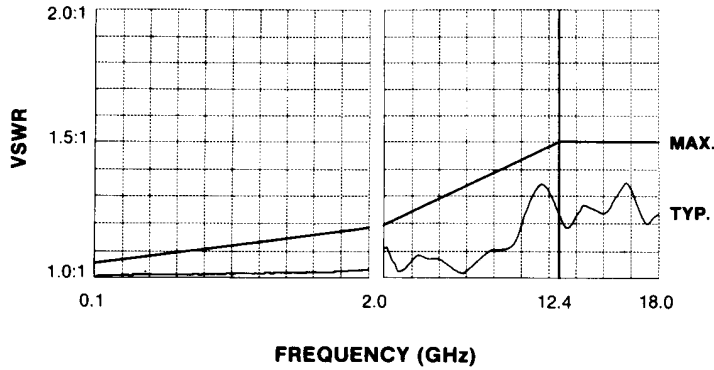

Lower Frequency

At 10MHz, typical values are:

Isolation: 100dB



VSWR: 1.05:1

Insertion Loss: 0.05dB

Because of the inherently good RF performance at lower frequencies, this product line is not tested below 2GHz except upon request.

Voltage: 20 to 30Vdc
 Coil Resistance: 290 Ohms min.
 Current: 100mA max @ 28Vdc and 20°C
 Switching Time: 20 milliseconds
 RF Contacts: break-before-make
 Impedance: 50 Ohms nominal
 Temperature: -55°C to 85°C
 Vibration: 20g's sine/random
 Life: 1,000,000 cycles min
 Weight: 919C70100 1.25 oz. max.
 919C70200 1.35 oz. max.

Dimensions

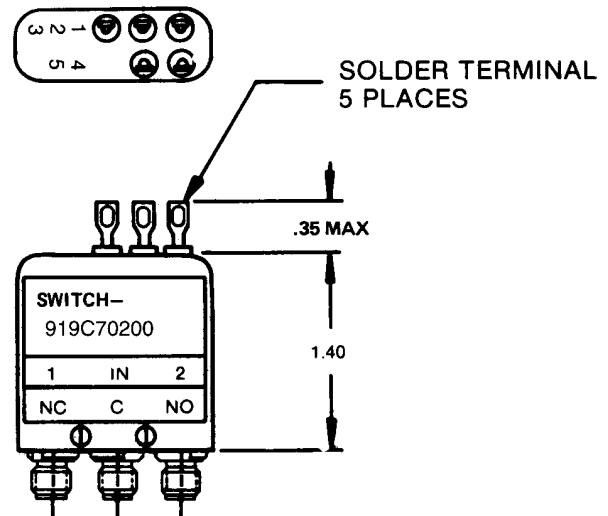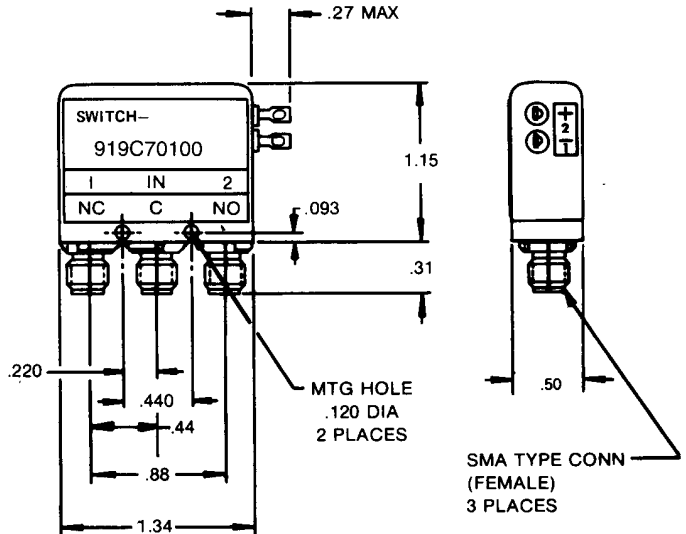

Coaxial Switch

Type DO

Description

The type DO latching and failsafe switches have RF geometry optimized for 3.5mm connectors and operate over a 0-26.5GHz frequency band. The latching model is magnetically latched and available with or without actuator cutoff circuitry. Both latching and failsafe models are available with or without indicators. DowKey's design mechanically links indicating switches to the rotating armature for positive indication.

Standard Products

P/N	Schematic	Type
905C90100	1	Latching
905C90100	2	Latching w/l.C.
905C91100	3	Pulse Latching
905C91200	4	Pulse Latching w/l.C.
915C90100	5	failsafe
915C90200	6	failsafe w/l.C.

* Meets MIL-S-3928

Special Configuration

Actuating Voltage Mounting Configuration
 Transient Circuit Terminal Location
 TTL Logic Circuit

(For dimensions and circuit diagrams see pages 106 and 107)



RF Circuit: SPDT


Actuator: Latching and Failsafe

Connector: *3.5mm


Frequency: 0-26.5GHz

Schematic


#1. Latching




2. Latching with Indicator

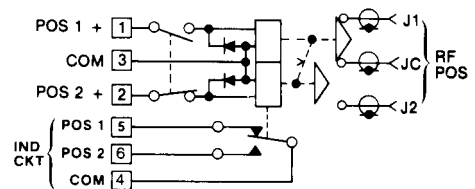


3. Pulse Latching



4. Pulse Latching w/ Indicator

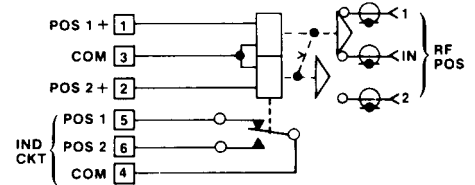


5. Failsafe






ENERGIZE TO CONNECT IN TO 2 (POS 2)
 SHOWN IN FAILSAFE POSITION (POS 1)

6. Failsafe w/Indicator

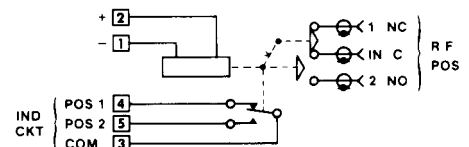

ENERGIZE TO CONNECT IN TO 2 (POS 2)
 SHOWN IN FAILSAFE POSITION (POS 1)

RF Characteristics

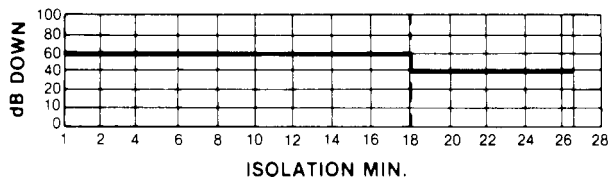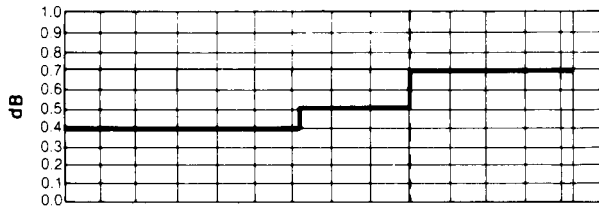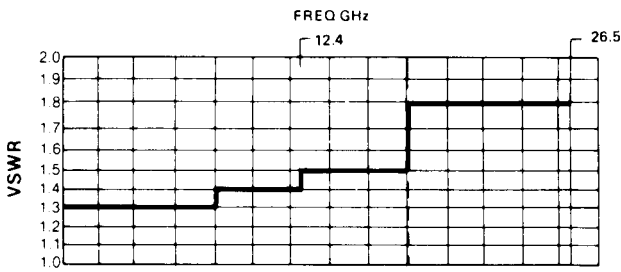


Voltage:	20 to 30Vdc
Coil Resistance:	310 ± 15 Ohms @ 20°C
Current:	95mA max @ 28Vdc and 20°C
Switching Time:	20 milliseconds
RF Contacts:	break-before-make
Impedance:	50 Ohms nominal
Temperature:	-55°C to 85°C
Vibration:	20g's sine/random
Life:	1,000,000 cycles min
Weight:	905C90100 Latching 1.5 oz.
	905C90200 Latching w/l.C. 2.0 oz.
	905C91100 Pulse Latching 1.5 oz.
	905C91200 Pulse Latching w/l.C. 2.0 oz.
	915C90100 failsafe 1.25 oz.
	915C90200 failsafe w/l.C. 1.35 oz.


Characteristics of failsafe Models

Coil Resistance	290 Ohms min.
Current	120mA max @ 28Vdc and 20°C

Dimensions - failsafe

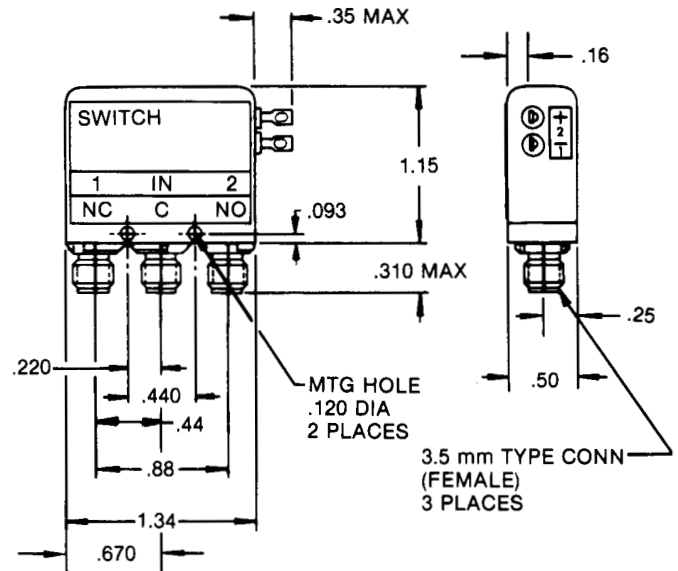

Latching and failsafe with indicator

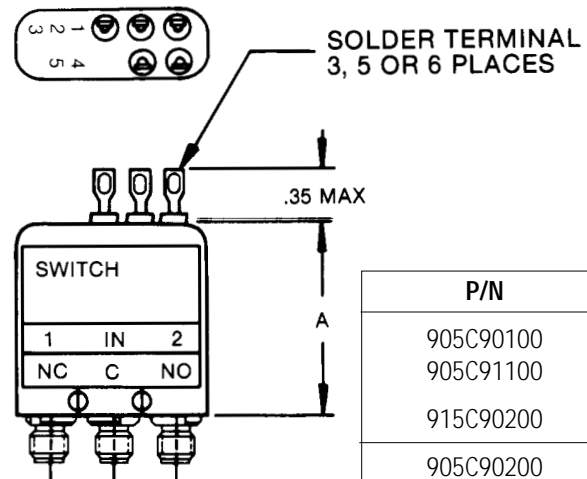

P/N	A
905C90100	1.30
905C91100	1.30
915C90200	1.40
905C90200	1.50
905C91200	1.50

Specifications subject to change without notice

Lower Frequency

At 10MHz, typical values are:

Isolation: 100dB


VSWR: 1.05:1

Insertion Loss: 0.05dB


Because of the inherently good RF performance at lower frequencies, this product line is not tested below 2GHz except upon request.

Schematic


909C70100-30 - 905C90100-30

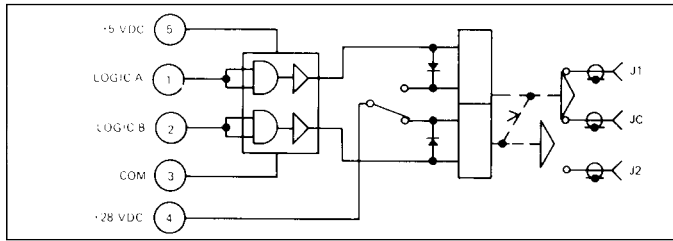


909C70200-30 - 905C90200-30

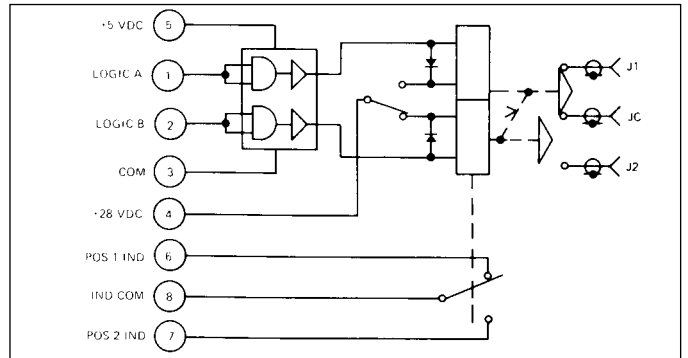


909C71100-30 - 905C91100-30

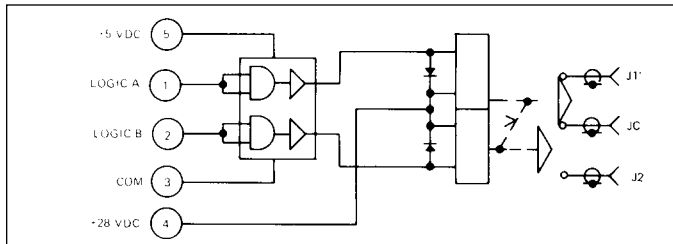


909C71200-30 - 905C91200-30

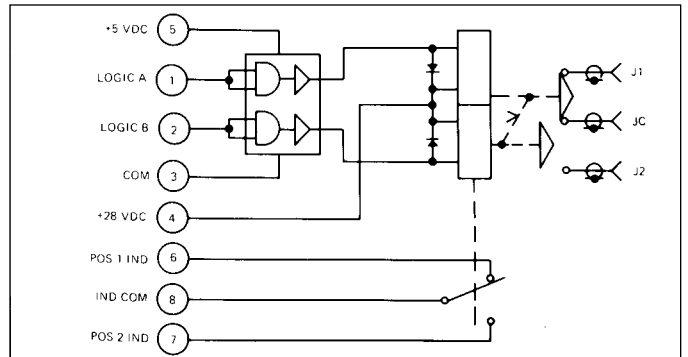


919C70100-30 - 915C90100-30

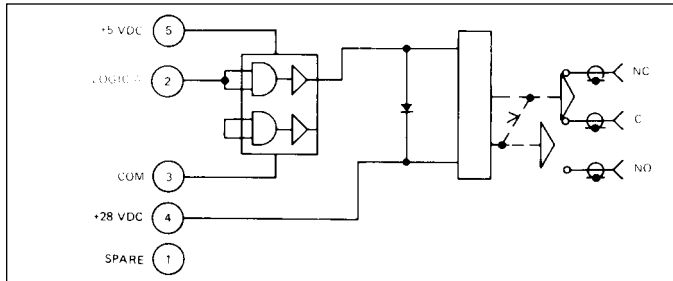

919C70200-30 - 915C90200-30

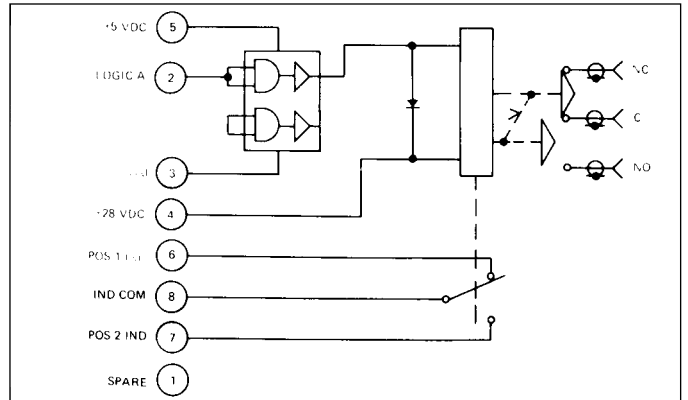

Dimensions

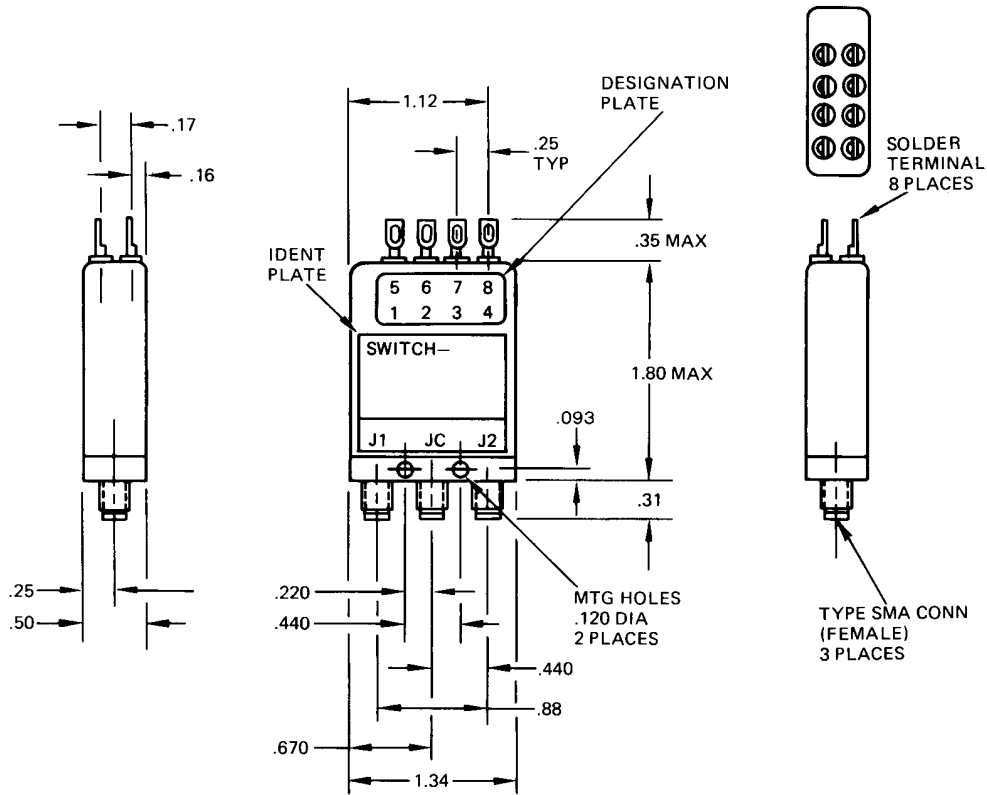

Logic Truth Table

Voltage

28Vdc	20 to 30Vdc
5Vdc	4.5 to 5.5Vdc
Logic 0	0 to 4Vdc
Logic 1	2.4 to 5.5Vdc pulse width 20ms at 20Vdc

Coil Current:	120mA max at 28Vdc, 20°C
Switching Time, Max:	20ms at 20Vdc

909C70200-30
 909C70100-30
 909C71100-30
 909C71200-30
 905C90100-30
 905C90200-30
 905C91100-30
 905C91200-30

Logic Truth Table		
RF Path	Logic Signal	
	A	B
In 1	1	0
In 2	0	1

919C70100-30
 919C70200-30
 915C90100-30
 915C90200-30

Logic Truth Table		
RF Path	Logic Signal	
	A	
In 1	0	
In 2	1	

Coaxial Switch

Type D

Description

The Type D Latching SPDT Switch has RF geometry optimized for N and TNC connectors and operates over a 0-12.4GHz frequency band. It is magnetically latched and available with or without an actuator cut-off circuit. It is also available with or without indicating switches. DowKey's design mechanically links indicating switches to the rotating armature for positive indication.

Actuator features:

1. Balanced rotating armature
2. Reliable actuation with low current
3. Positive latching with permanent magnets

A single voltage pulse of 50 milliseconds is all that is required to change positions; no holding power is required to maintain a position.

Magnetic latching offers distinct advantages over other mechanisms since it uses no springs or mechanical detents which are prone to fatigue and wear. DowKey considers magnetic latching to be the optimum design for applications which require high vibration levels, environmental extremes, long life and reliability.


This switch is part of the DowKey family of switches. Other types in this family are referenced below.

RF Circuit: SPDT
Actuator: Latching
Connector: TNC & N
Frequency: 0-12.4GHz




Schematic


#1. Latching




2. Latching with Indicator

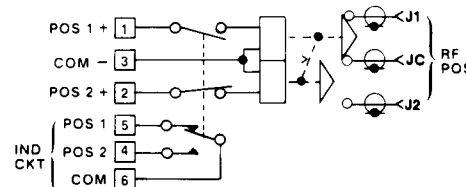

3. Pulse Latching



4. Pulse Latching w/ Indicator

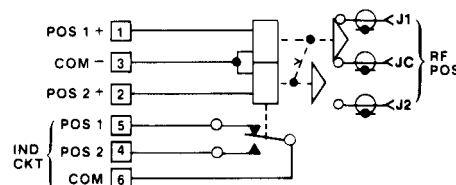

Type	Conn.	Freq.
DO	SMA	18 GHz
DX	SC	6.5 GHz

Meets MIL-S-3928

Standard Products

P/N	Conn.	Schematic
805C00100	N	1
805C00200	N	2
805C01100	N	3
805C01200	N	4
805C30100	TNC	1
805C30200*	TNC	2
805C31100	TNC	3
805C31200	TNC	4

Meets MIL-S-3928/20-08




Special Configuration

DC-Power Plug	TTL Logic
Transient Circuit	Terminal Location

Specifications


Typical RF data of a production switch; computer printouts below:

Type N Shown

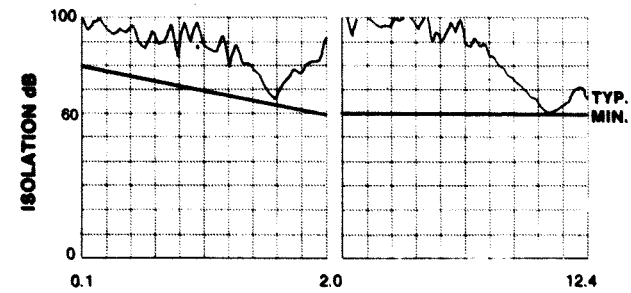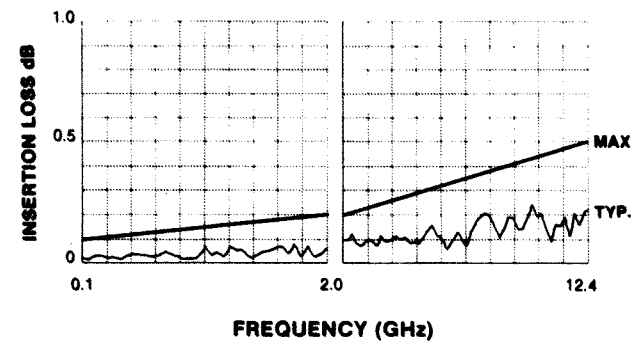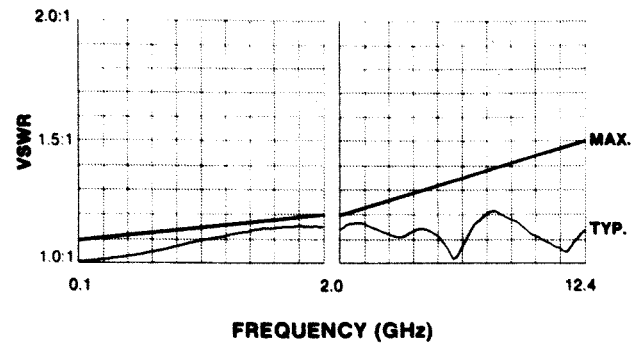


Actuator Voltage: 20 to 30Vdc
 Coil Resistance: 95 ± 5 Ohms @ 20°C
 Current: 0.31 amps max. @ 28Vdc
 Switching Time: 20 milliseconds
 RF Contacts: break-before-make
 Impedance: 50 Ohms nominal
 Temperature: -55°C to 85°C
 Vibration: 20g's sine/random
 Life: 100,000 cycles min
 Weight: 8.2 oz. max.

Dimensions

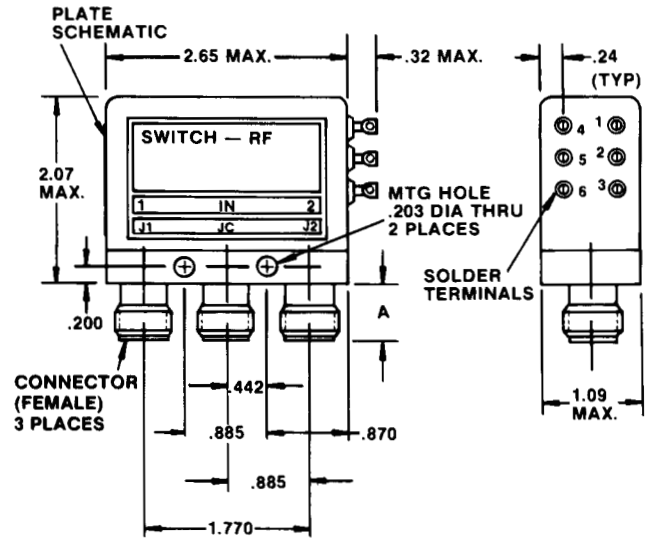

805C00200 SHOWN

CONN	A
N	.60
TNC	.56



805C00100 SHOWN

Lower Frequency

At 10MHz, typical values are:

Isolation: 100dB

VSWR: 1.05:1

Insertion Loss: 0.05dB

Because of the inherently good RF performance at lower frequencies, this product line is not tested below 2GHz except upon request.

Coaxial Switch

Type D

Description

The Type D Coaxial SPDT Switch has RF geometry optimized for TNC and N connectors and operates over a 0-12.4GHz frequency band. It is also available with or without indicators. DowKey's design mechanically links indicating switches to the rotating armature for positive indication.

Actuator features:

1. Balanced rotating armature
2. Lower current required to develop the actuating torque.
3. Dual holding power - permanent magnet plus electromagnet

This design features a dual magnetic field for high efficiency and long life reliability...and excellent shock/vibration characteristics.

This switch is part of the DowKey family of switches. Other types in this family are referenced below.

Type	Conn.	Freq.
DO	SMA	18 GHz
DX	SC	6.5 GHz

RF Circuit: SPDT
Actuator: Failsafe
Connector: TNC & N
Frequency: 0-12.4GHz




Standard Products

P/N	Conn.	Schematic
810C00100	N	1
810C00200	N	2
810C30100	TNC	1
810C30200	TNC	2

Meets MIL-S-3928/10-04 (810C00100)
 MIL-S-3928/10-05 (810C00200)


Schematic

#1. Failsafe



SHOWN IN FAIL-SAFE POSITION (NC)
 ENERGIZE TO CONNECT POSITION 2 (NO)

2. Failsafe with Indicator Circuit

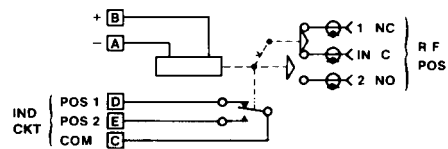

SHOWN IN FAIL-SAFE POSITION (NC)
 ENERGIZE TO CONNECT POSITION 2 (NO)

Special Configuration

Actuating Voltage TTL Logic Circuit
 Transient Circuit Terminal Location
 Mounting Configuration





Specifications

Typical RF data of a production switch; computer printouts below:

Type N Shown


Actuator Voltage: 20 to 30Vdc
 Coil Resistance: 190 ± 10 Ohms @ 20°C
 Current: 160 amps max. @ 28Vdc and 20°C
 Switching Time: 20 milliseconds max. RF to RF
 RF Contacts: break-before-make
 Impedance: 50 Ohms nominal
 Temperature: -55°C to 85°C
 Vibration: 20g's sine/random
 Life: 1,000,000 cycles min
 Weight: 8.2 oz. max.

Dimensions

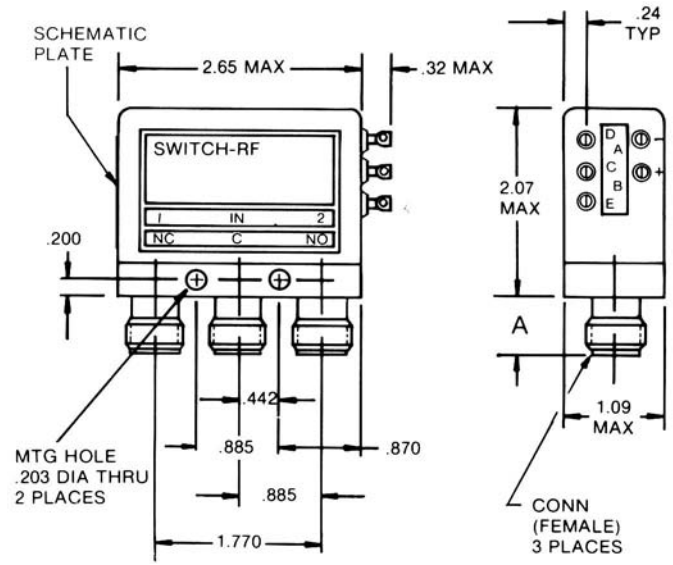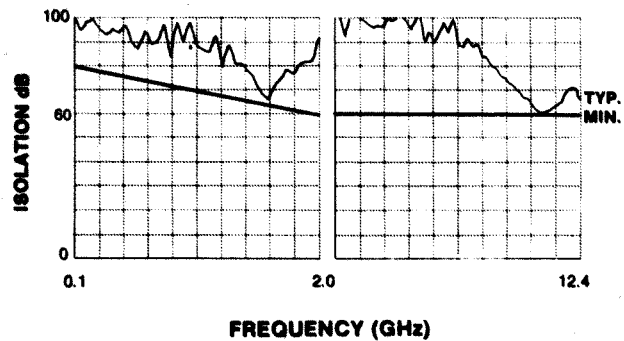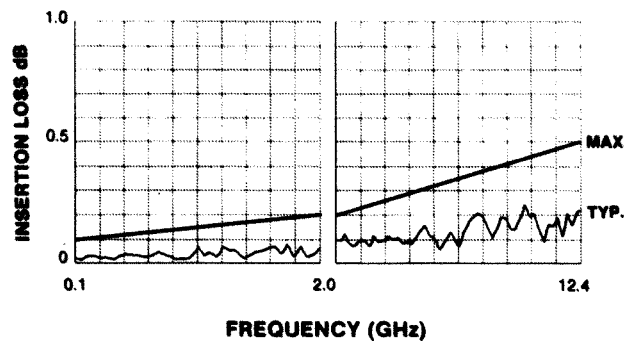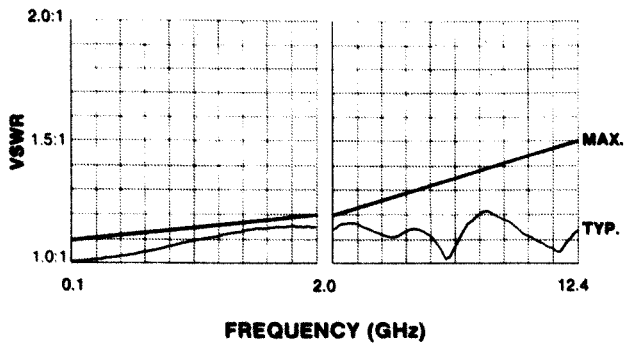

810C00200 SHOWN

CONN	A
N	.60
TNC	.56



810C00100 SHOWN

Lower Frequency

At 10MHz, typical values are:

Isolation: 100dB

VSWR: 1.05:1

Insertion Loss: 0.05dB

Because of the inherently good RF performance at lower frequencies, this product line is not tested below 2GHz except upon request.

Coaxial Switch

Type DT

Description

The Type DT Coaxial Switch has RF geometry optimized for TNC connectors and operates over a 0-12.4GHz frequency band. This type switch is in a smaller package than Type D and is available in Latching or failsafe models, with or without indicators.

Latching models use a magnetic latching actuator with cut-off circuitry. This switch draws current for approximately 30 milliseconds to change position; no holding power is required to maintain a position.

The failsafe models feature dual holding power...a permanent magnet plus electromagnet for low current with high efficiency.

This switch is part of the DowKey family of switches. Other types in this family are referenced below.

Type	Conn.	Freq.
D	N &TC	1 2.4 GHz
DO	SMA	1 8 GHz
DX	SC	6.5 GHz




Standard Products

P/N	Schematic
900C30100	1
900C30200	2
910C30100	3
910C30200	4


* Meets MIL-S-3928/15

Schematic


#1. Latching




2. Latching with Indicator

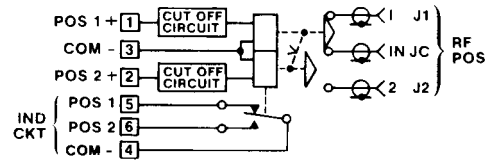

3. Failsafe



4. Failsafe w/ Indicator

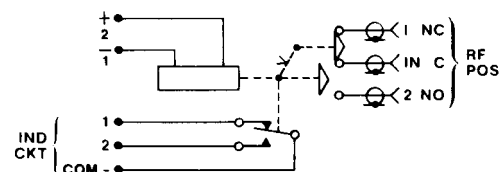

Specifications

Typical RF data of a production switch; computer printouts below:

Type TNC Shown

Voltage: 20 to 30Vdc
 Switching Time: 20 milliseconds max @ 28Vdc
 RF Contacts: break-before-make
 Impedance: 50 Ohms nominal
 Temperature: -55°C to 85°C
 Vibration: 20g's sine/random
 Life: 100,000 cycles min
 Weight: 4 oz. max.

Latching Models




900C30100 and 900C30200

Coil Resistance: 55 ± 5 Ohms @ 20°C
 Current: 510mA max @ 28Vdc and 20°C


failsafe Models

910C30100 and 910C30200


Coil Resistance: 115 ± 5 Ohms @ 20°C
 Current: 280mA max @ 28Vdc and 20°C

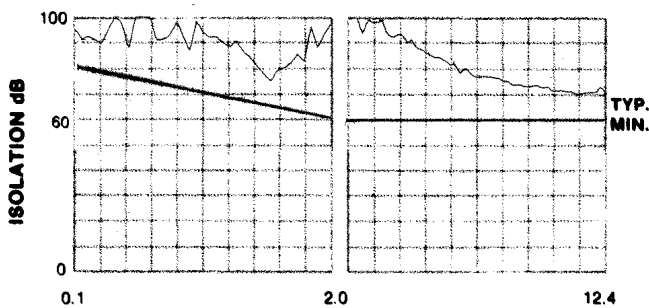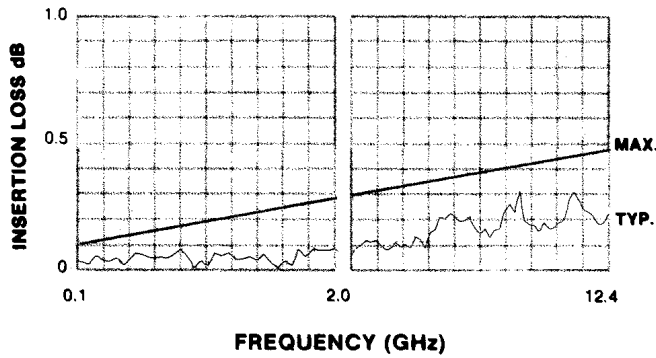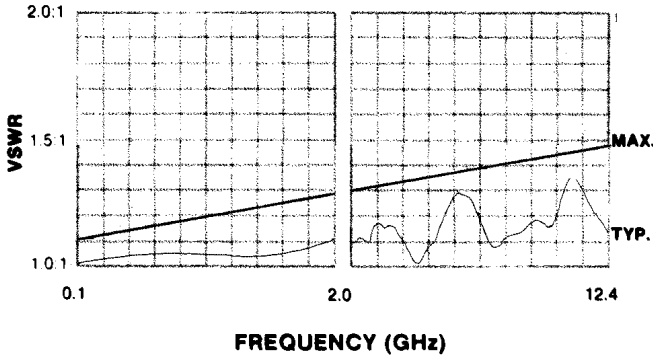

Dimensions

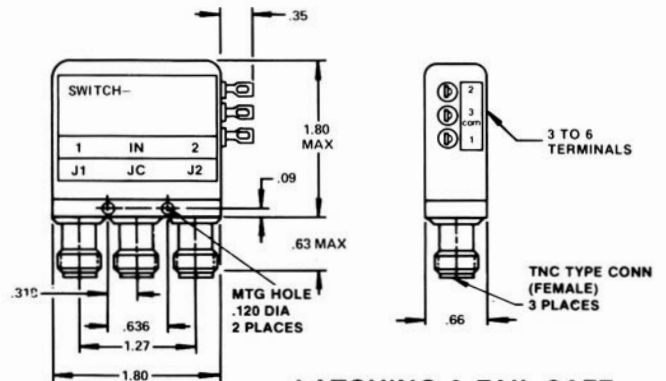

**LATCHING & FAIL-SAFE
With Indicating Switches**

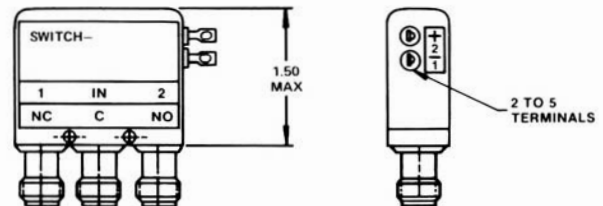

FAIL-SAFE Without Indicating Switches
DIM. NOT SHOWN ARE SAME AS ABOVE

Lower Frequency

At 10MHz, typical values are:

Isolation: 100dB

VSWR: 1.05:1

Insertion Loss: 0.05dB

Because of the inherently good RF performance at lower frequencies, this product line is not tested below 2GHz except upon request.

**Mating connector
to be 5/8" diameter**

Coaxial Switch

Type DX

Description

The Type DX Coaxial Switches are designed for high average power applications over a 0-6.5GHz frequency band. They use SC connectors with one inch center-to-center spacing.

These switches utilize HCl (heat conducting dielectric) to increase the average power handling capabilities. Test results on a large number of components employing HCl have consistently indicated a CW power rating 2.5 times greater than obtainable with conventional low-loss dielectric materials.

These switches are available in latching or failsafe models, with or without indicating switches.

The latching models use DowKey's Type D switch magnetic latching actuator featuring a balanced rotating armature.

The failsafe models use DowKey's Type D switch failsafe actuator featuring dual holding power...a permanent magnet and electromagnet.

This switch is part of a DowKey family of switches. Other types in this family are referenced below.

Type	Conn.	Freq.
D	N &TNC	1 2.4 GHz
DO	SMA	1 8 GHz

Standard Products

P/N	Schematic
800C51100	1
800C51200	2
810C51100	3
810C51200	4
800C50100	
800C50200	①
* Meets MIL-S-3928	②

① Same as schematic 1 with the addition of current cutoff circuit.


② Same as schematic 2 with the addition of current cutoff circuit.

RF Circuit: SPDT High Power
Actuator: Latching and Failsafe
Connector: SC
Frequency: 0-6.5GHz




Schematic


#1. Pulse Latching

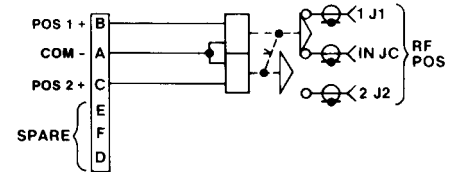


2. Pulse Latching with Indicator

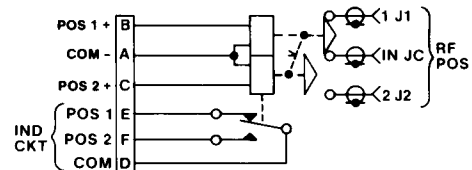

3. Failsafe

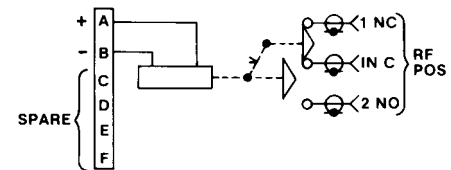

4. Failsafe w/ Indicator

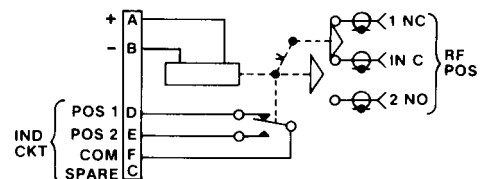

Specifications

Typical RF data of a production switch; computer printouts below:

Voltage: 20 to 30Vdc
 RF Contacts: break-before-make
 Impedance: 50 Ohms nominal
 Temperature: -55°C to 85°C
 Vibration: 10g's sine/random
 Life: 100,000 cycles min
 Weight: 8.5 oz. max.

Latching Models

800C51100 and 800C51200




800C50100 and 800C50200

Coil Resistance: 95 ± 5 Ohms @ 20°C
 Current: 320mA max @ 28Vdc and 20°C
 Switching Time: 20mS max @ 28Vdc and 20°C



failsafe Models

810C51100 and 810C51200

Coil Resistance: 310 ± 5 Ohms @ 20°C
 Current: 280mA max @ 28Vdc and 20°C
 Switching Time: 30mS max @ 28Vdc and 20°C

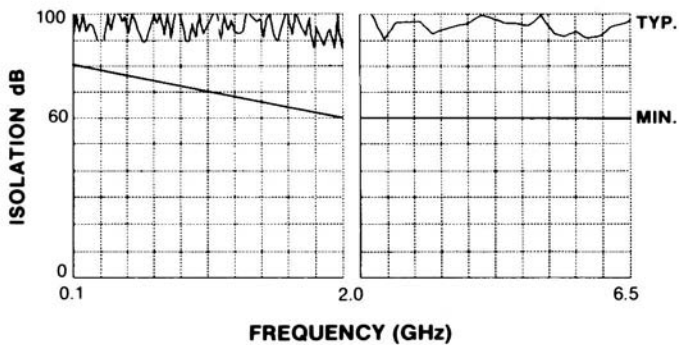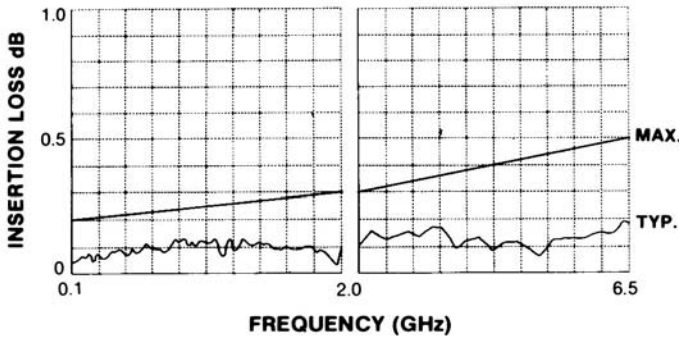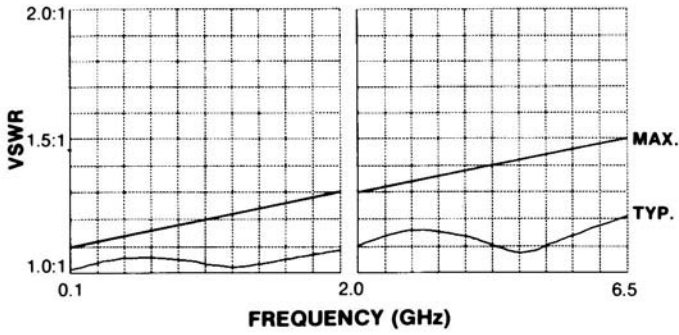

Dimensions

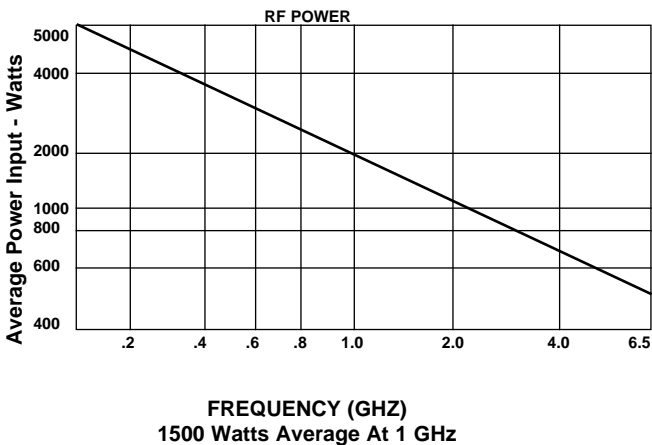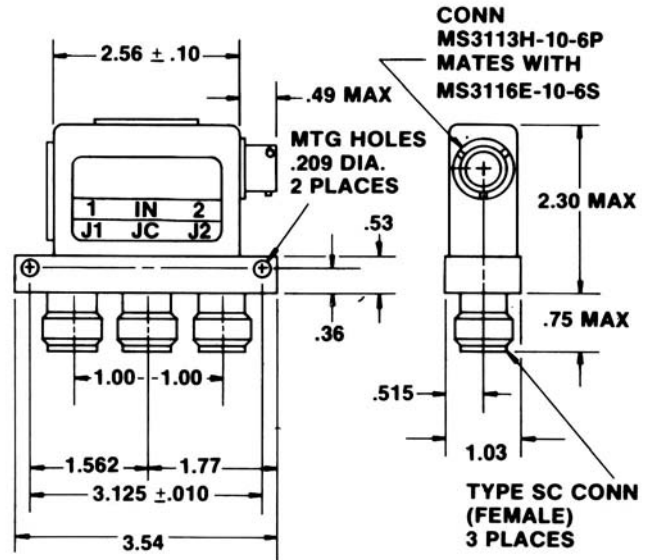

At 10MHz, typical values are:
 Isolation: 100dB
 VSWR: 1.05:1
 Insertion Loss: 0.05dB
 Because of the inherently good RF performance at lower frequencies, this product line is not tested below 2GHz except upon request.

Coaxial Switch

Type PD

Description

The Type PD Switch has the RF contact operation of make-before-break for switching under RF power. The Type PD Switch is available in latching or failsafe models with or without indicating switches.

MBB: Contacts arranged so the closing contacts make before interrupting the closed circuit. This type always has both circuits closed for an instant.

The MBB option offers an advantage in some high power switching applications because the maximum VSWR is limited to a value slightly in excess of 2:1. The BBM type presents a momentary infinite VSWR during switching.

The failsafe model features the same actuator design as the failsafe Type D Switch.

This switch has been tested 63,000 cycles under the following conditions with no measurable effect on the performance specifications.

Power	Frequency	Cycles
25 W CW	3350MHz	3,000
150 W CW	250MHz	20,000
	1087MHz	40,000

4KW pk., 5 W average.

These are not maximum ratings. Please contact DowKey/Transco regarding a switch to test in your system.

Standard Products

P/N	Conn	Schematic
808C00100	N	1 } Latching
808C00200	N	2 } Latching
818C00100	N	3 } failsafe
818C00200	N	4 } failsafe
808C30100	TNC	1 } Latching
808C30200	TNC	2 } Latching
818C30100	TNC	3 } failsafe
818C30200	TNC	4 } failsafe


* Meets MIL-S-3928

RF Circuit: SPDT (MBB)
Actuator: Latching and Failsafe
Connector: TNC & N
Frequency: 0-12.4GHz




Schematic


#1. Latching

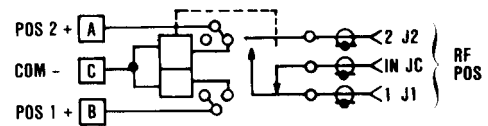


2. Latching with Indicator

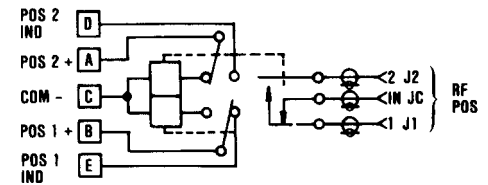

3. Failsafe






4. Failsafe w/ Indicator

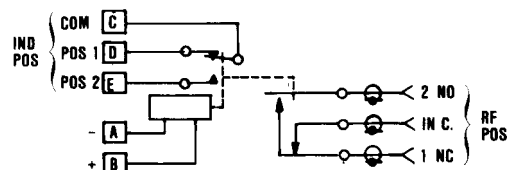

Specifications

Typical RF data of a production switch; computer printouts below:

Type N shown

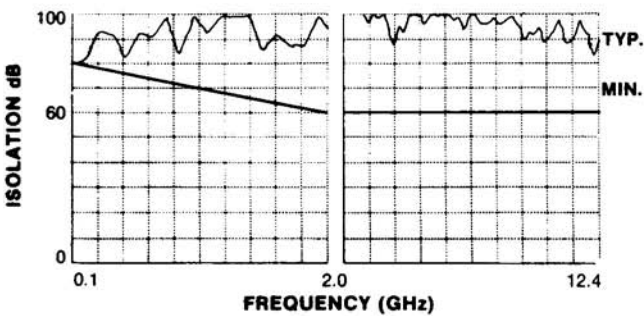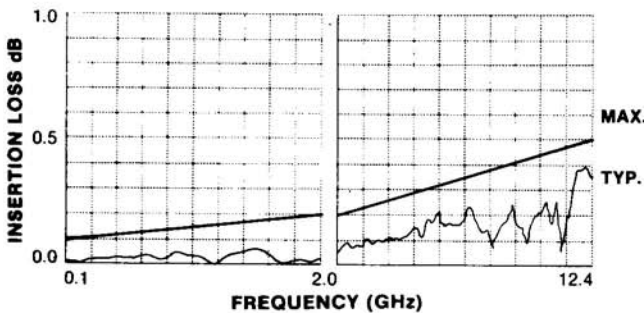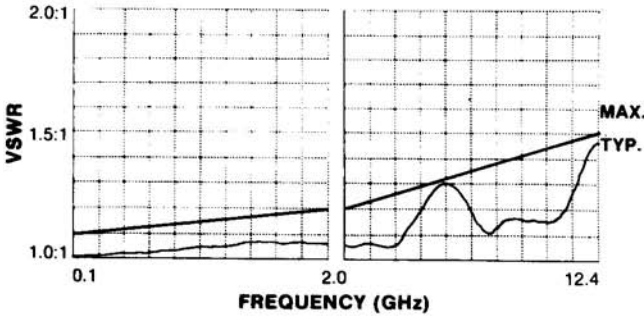

Lower Frequency

At 10MHz, typical values are:

Isolation: 80dB

VSWR: 1.05:1

Insertion Loss: 0.05dB

Because of the inherently good RF performance at lower frequencies, this product line is not tested below 2GHz except upon request.

Voltage: 20 to 30Vdc
 Switching Time: 30 milliseconds max @ 28Vdc
 RF Contacts: break-before-make
 Time in MBB Pos: 2mS approx.
 Impedance: 50 Ohms nominal
 Temperature: -55°C to 85°C
 Vibration: 20g's sine/random
 Life: 100,000 cycles min
 Weight: 8 oz. max.

Latching Models

808C00100 and 808C00200

808C30100 and 808C30200

Coil Resistance: 55 ± 5 Ohms @ 20°C

Current: .51 amp @ 28Vdc and 20°C

failsafe Models


818C00100 and 818C00200

818C30100 and 818C30200

Coil Resistance: 100 ± 5 Ohms @ 20°C

Current: .28 amp @ 28Vdc and 20°C

Dimensions

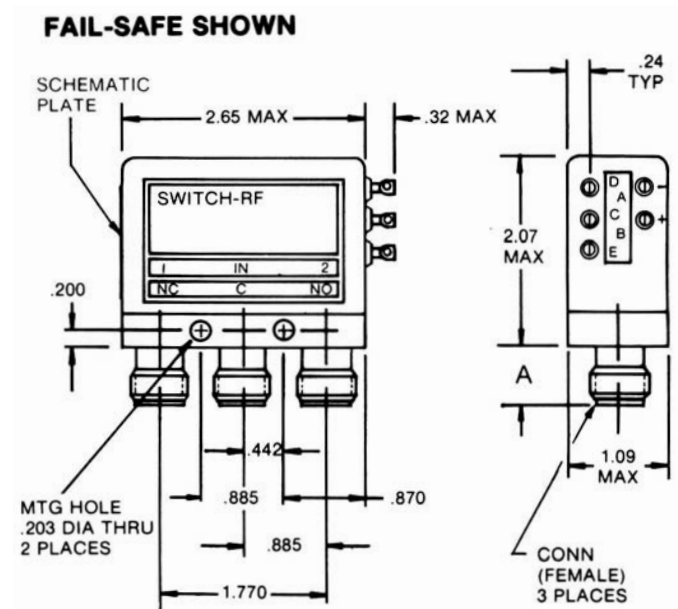

Coaxial Switch

Type HO

Description

The Type HO Coaxial Switch has RF geometry optimized for SMA connectors and operates over a 0-18GHz frequency band. It is magnetically latched and available with or without an actuator cut-off circuit. It is also available with or without indicators. DowKey's design mechanically links indicating switches to the rotating armature for positive indication.

Actuator features:

1. Balanced rotating armature
2. Reliable actuation with low current
3. Positive latching with permanent magnets
4. Basic design concept qualified for space applications.

A single voltage pulse of 20 milliseconds is all that is required to change positions; no holding power is required to maintain a position.

Magnetic latching offers distinct advantages over other mechanisms since it uses no springs or mechanical detents which are prone to fatigue and wear. DowKey considers magnetic latching to be the optimum design for applications which require high vibration levels, environmental extremes, long life and reliability.

This switch is part of a DowKey family of switches. Other types in this family are referenced below.

Type	Conn.	Freq.
H	N	12.4GHz
HT	TNC	12.4GHz
HX	SC	6.5GHz

Standard Products

P/N	Schematic
700C70100	1
700C70200	2
700C71100	3
700C71200	4

Meets MIL-S-3928

Special Configuration


Actuating Voltage	TTL Logic Circuit
Transient Circuit	Terminal Location
Power Plug	Mounting Configuration

RF Circuit: Transfer
Actuator: Latching
Connector: SMA
Frequency: 0-18GHz




Schematic


#1. Latching

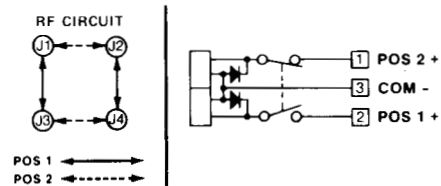


2. Latching with Indicator Circuit

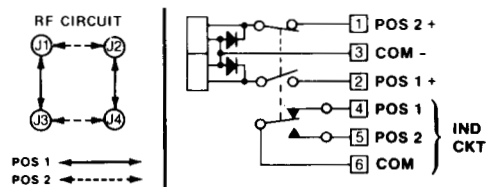

3. Pulse Latching



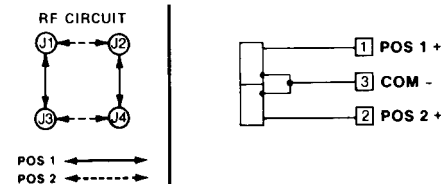


4. Pulse Latching w/ Indicator Circuit

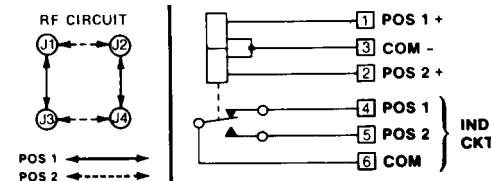



Specifications

Typical RF data of a production switch; computer printouts below:

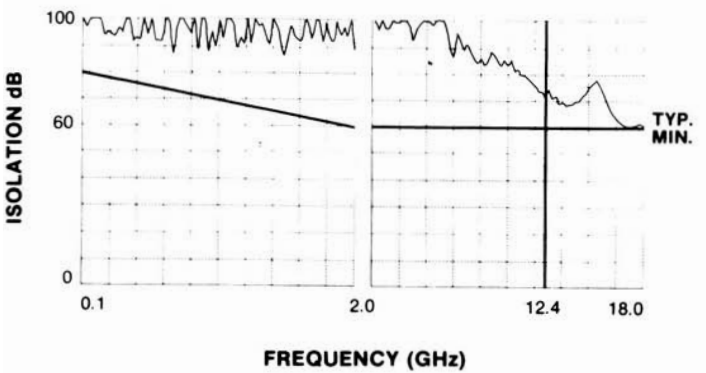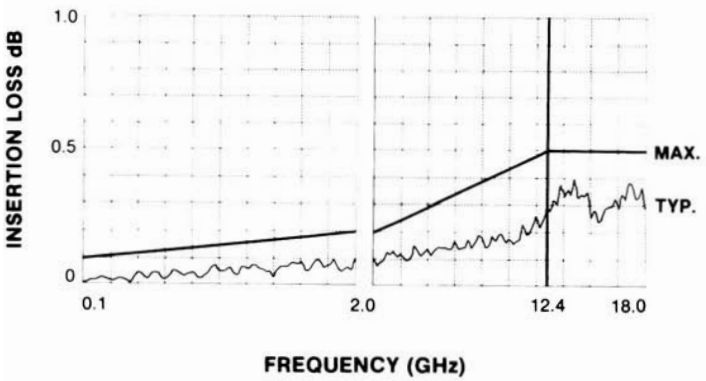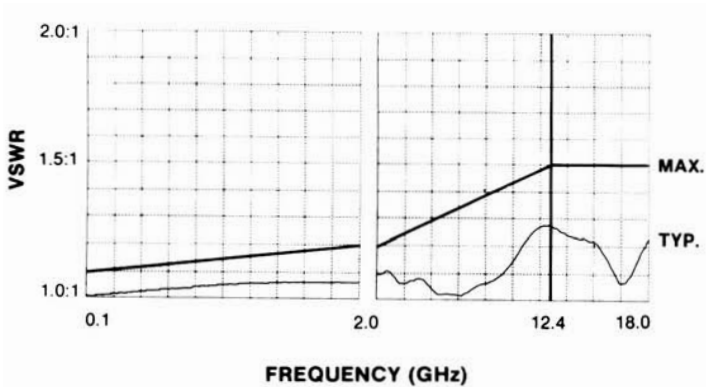

- Actuator Voltage: 20 to 30Vdc
- Coil Resistance: 500 ± 50 Ohms @ 20°C
- Current: 65 mA max. @ 28Vdc and 20°C
- Switching Time: 20 milliseconds @ 28Vdc and 20°C
- RF Contacts: break-before-make
- Impedance: 50 Ohms nominal
- Temperature: -55°C to 85°C
- Vibration: 20g's sine/random
- Life: 100,000 cycles min
- Weight: 3.5 oz. max.

Dimensions

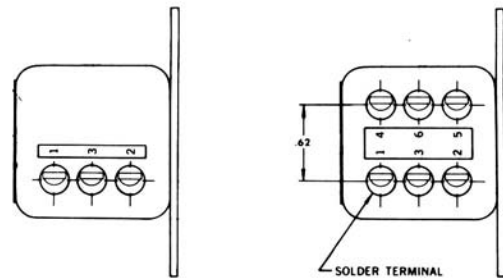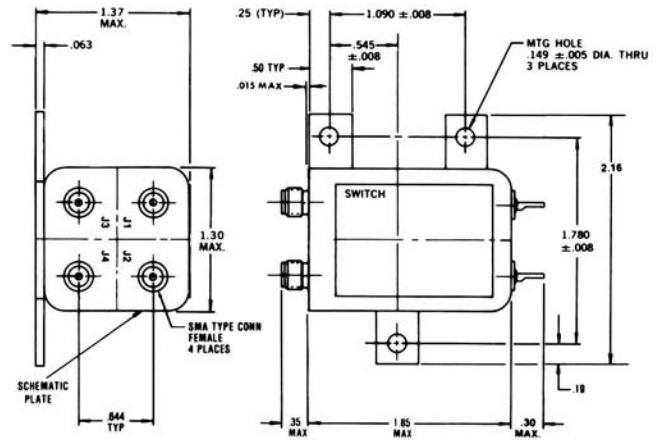

WITHOUT INDICATOR

WITH INDICATOR

Lower Frequency

At 10MHz, typical values are:

Isolation: 100dB

VSWR: 1.05:1

Insertion Loss: 0.05dB

Because of the inherently good RF performance at lower frequencies, this product line is not tested below 2GHz except upon request.

Coaxial Switch

Types HO & HOF

Description

The Type HO Transfer Switch has RF geometry optimized for SMA connectors and operates over a 0-18GHz frequency band. It is also available with or without indicators. DowKey's design mechanically links indicating switches to the rotating armature for positive indications.

Actuator features:

1. Balanced rotating armature
2. Low current required to develop the actuating torque
3. Dual holding power - permanent magnet plus electromagnet.

The design features a dual magnetic field for high efficiency and long life reliability - also excellent shock/vibration characteristics.

This switch is part of a DowKey family of switches. Other types in this family are referenced below.

Type	Conn.	Freq.
H	N	12.4GHz
HT	TNC	12.4GHz
HX	SC	6.5GHz

Standard Products

P/N	Schematic
710C70100*	1
710C70200	2
715C70100*	3
710C71400**	4 (with arc suppression diode)

*Meets MIL-S-3928/19-02

**Meets MIL-S-3928/19-05

Special Configuration


Actuating Voltage	TTL Logic Circuit
Transient Circuit	Terminal Location
Power Plug	Mounting Configuration

RF Circuit: Transfer
Actuator: Failsafe
Connector: SMA
Frequency: 0-18GHz




Schematic


#1. Failsafe




2. Failsafe with Indicator Circuit

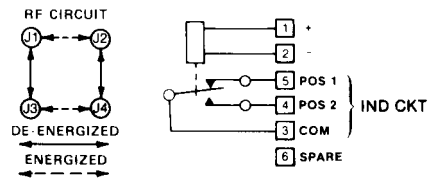

3. Failsafe

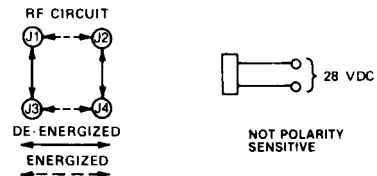


4. Failsafe w/ Indicator Circuit

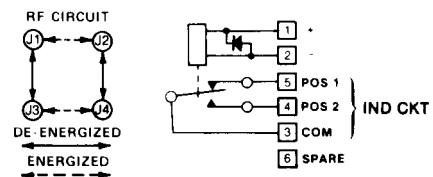

Specifications


Typical RF data of a production switch; computer printouts below:

Type N Shown

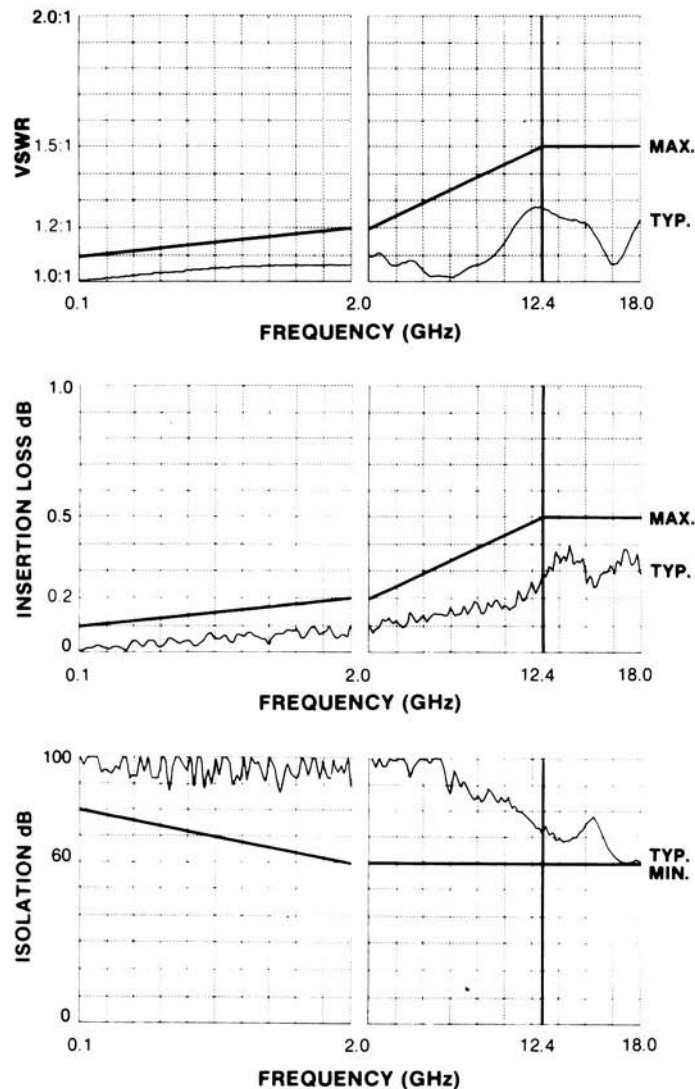


Actuator Voltage: 20 to 30Vdc
 Coil Resistance: 250 ± 25 Ohms @ 20°C
 Current: 120 mA max. @ 28Vdc and 20°C
 Switching Time: 20 milliseconds @ 28Vdc and 20°C
 RF Contacts: break-before-make
 Impedance: 50 Ohms nominal
 Temperature: -55°C to 85°C
 Vibration: 20g's sine/random
 Life: 100,000 cycles min
 Weight: 3.5 oz. max.

Dimensions

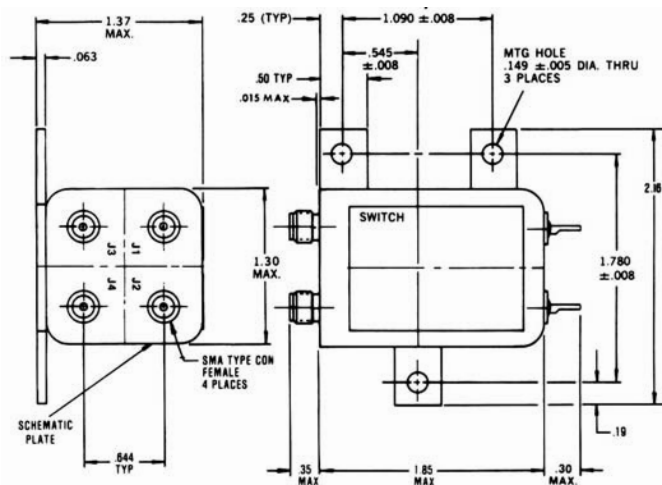


HO 710C70100 & 710C70200

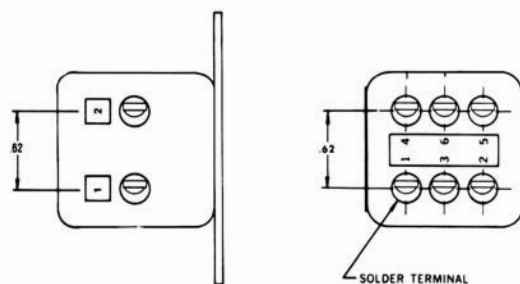

WITHOUT INDICATOR

WITH INDICATOR

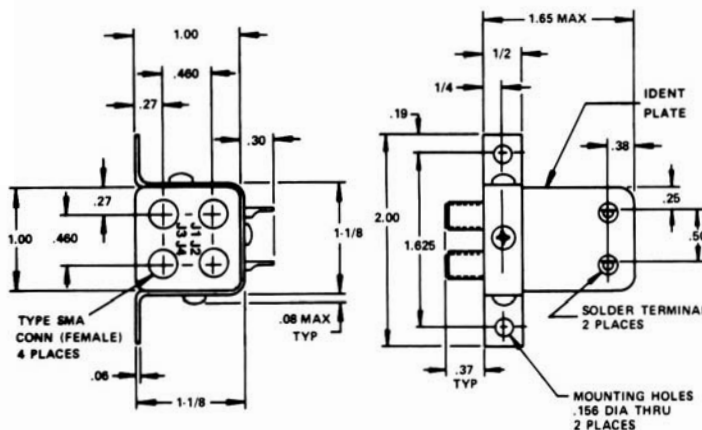

HOF 715C70100

Lower Frequency

At 10MHz, typical values are:

Isolation: 100dB

VSWR: 1.05:1

Insertion Loss: 0.05dB

Because of the inherently good RF performance at lower frequencies, this product line is not tested below 2GHz except upon request.

Coaxial Switch

Type HO

Description

The Type HO Coaxial Transfer Switches have RF geometry optimized for 3.5mm connectors and operate over a 0-26.5GHz frequency band. The latching model is magnetically latched and is available with or without actuator cutoff circuit. Both latching and failsafe models are available with or without indicators.

A single voltage pulse of 20 milliseconds is all that is required to change positions. No holding power is required to maintain a position.

DowKey's failsafe model design features a dual magnetic field for high efficiency and long life reliability - also excellent shock/vibration characteristics.

Standard Products

P/N	Schematic	Type
705C90100	1	Latching
705C90200	2	Latching w/l.C.
705C91100	3	Pulse Latching
705C91200	4	Pulse Latching w/l.C.
745C90100	5	failsafe
745C90200	6	failsafe w/l.C.

Meets MIL-S-3928

Special Configuration


Actuating Voltage	Mounting Configuration
Transient Circuit	Terminal Location
TTL Logic Circuit	Power Plug




RF Circuit: Transfer
Actuator: Latching and Failsafe
Connector: 3.5mm
Frequency: 0-26.5GHz

Schematic


#1. Latching

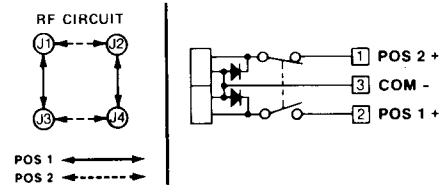


2. Latching with Indicator Circuit

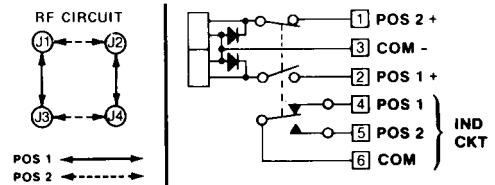


3. Pulse Latching

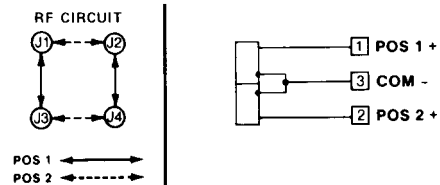


4. Pulse Latching w/ Indicator Circuit

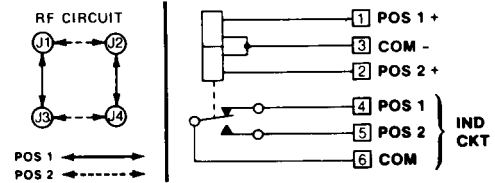

5. Failsafe

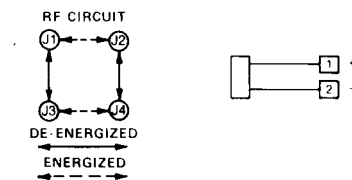




6. failsafe w/Indicator Circuit

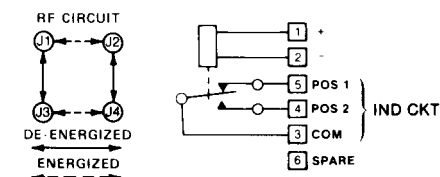

Specifications

Maximum RF performance of a production switch

RF Characteristics

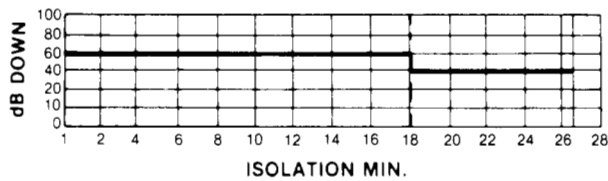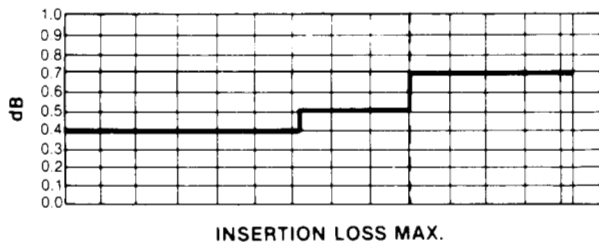
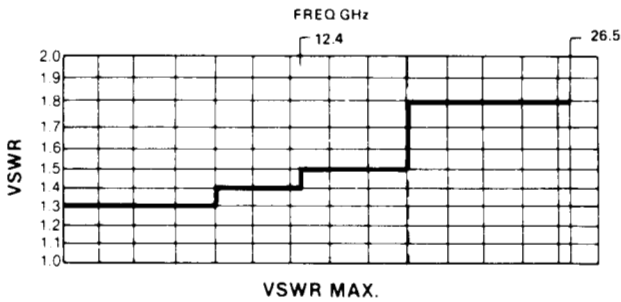


Voltage: 20 to 30Vdc
 Coil Resistance: 500 ± 50 Ohms @ 20°C
 Current: 65mA max @ 28Vdc and 20°C
 Switching Time: 20 milliseconds @ 28Vdc and 20°C
 RF Contacts: break-before-make
 Impedance: 50 Ohms nominal
 Temperature: -55°C to 85°C
 Vibration: 20g's sine/random
 Life: 100,000 cycles min
 Weight: 3.5 oz.


Characteristics of failsafe Models

Coil Resistance: 250 ± 25 Ohms @ 20°C
 Current: 120mA max @ 28Vdc and 20°C


Dimensions

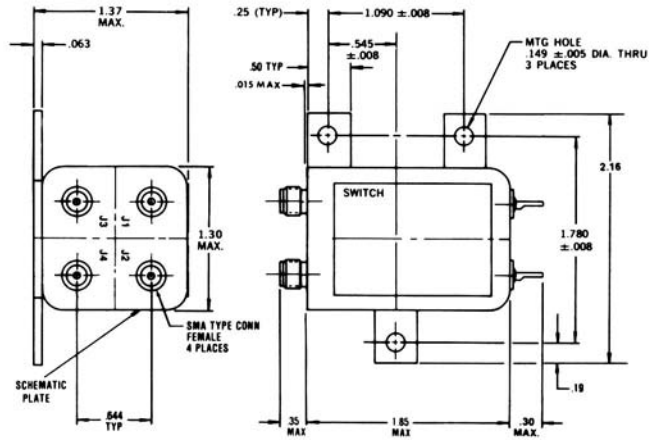

LATCHING WITHOUT INDICATOR



LATCHING WITH INDICATOR

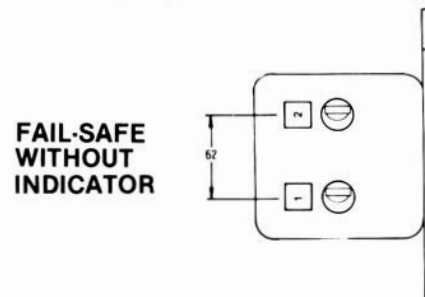

FAIL-SAFE WITHOUT INDICATOR

Lower Frequency

At 10MHz, typical values are:

Isolation: 100dB


VSWR: 1.05:1

Insertion Loss: 0.05dB


Because of the inherently good RF performance at lower frequencies, this product line is not tested below 2GHz except upon request.

Schematic


700C70100-30 - 705C90100-30

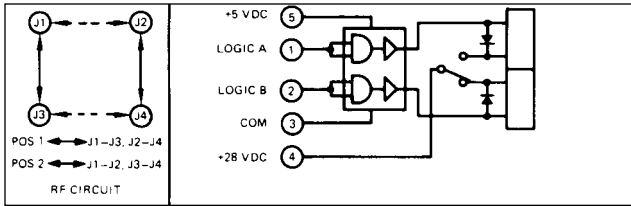


700C70200-30 - 705C90200-30

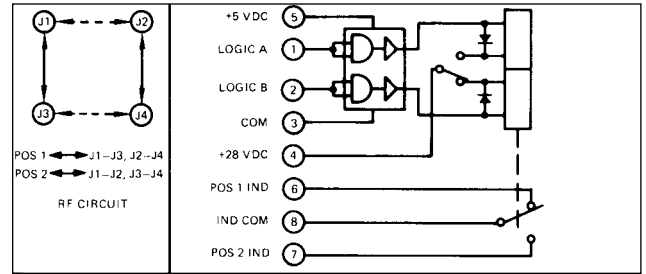


700C71100-30 - 705C91100-30

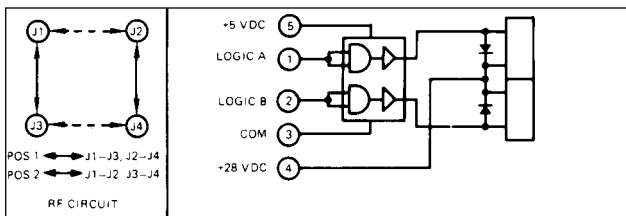


700C71200-30 - 705C91200-30

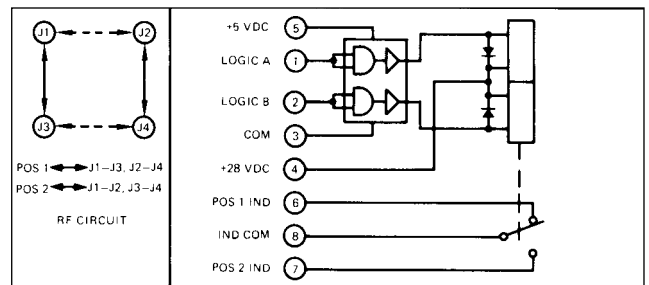


710C70100-30 - 745C90100-30

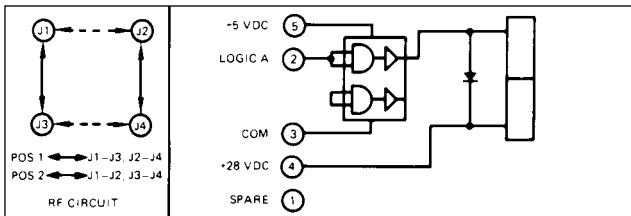

710C70200-30 - 745C90200-30

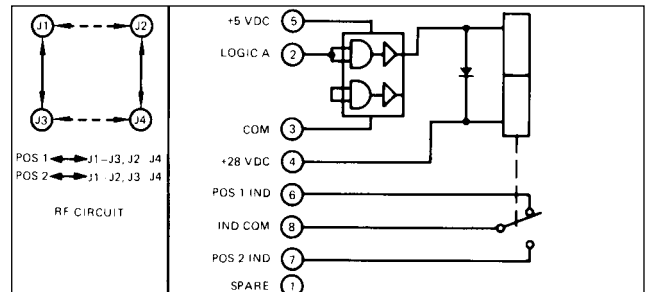

Dimensions

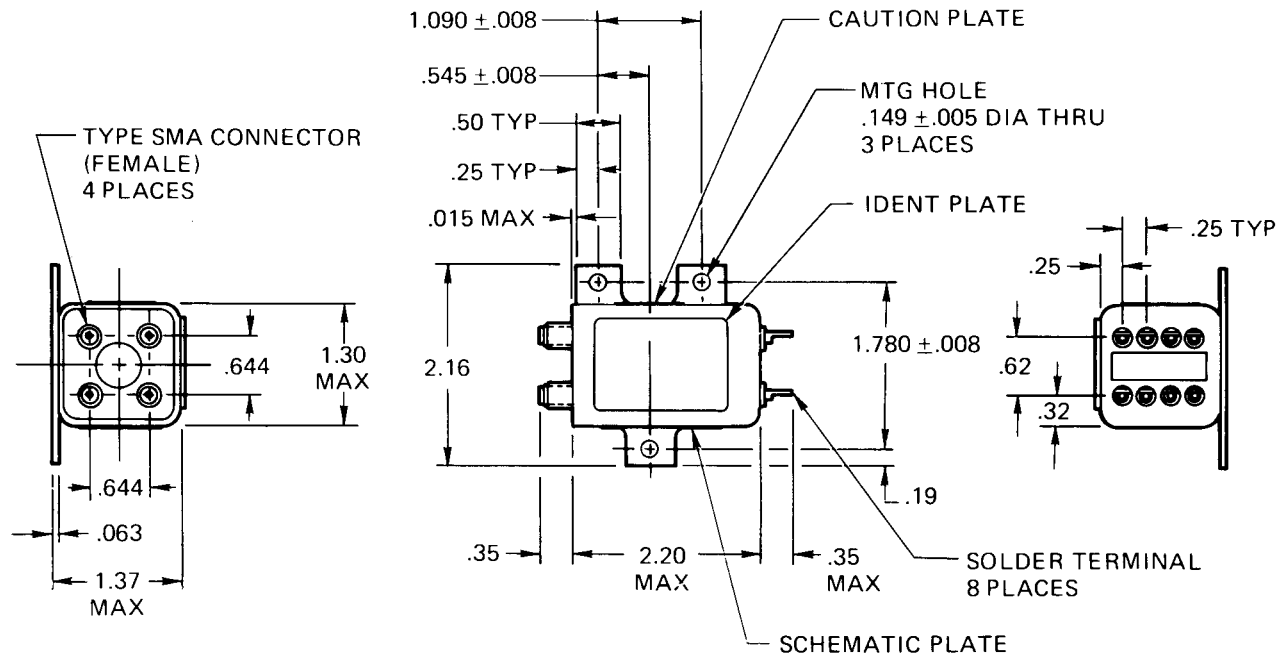

Logic Truth Table

Voltage

28Vdc	20 to 30Vdc
5Vdc	4.5 to 5.5Vdc
Logic 0	0 to .4Vdc
Logic 1	2.4 to 5.5Vdc pulse width 20ms at 20Vdc MIN

Switching Time, Max: 20ms at 20Vdc

- 700C70100-30
- 700C70200-30
- 700C71100-30
- 700C71200-30
- 705C90100-30
- 705C90200-30
- 705C91100-30
- 705C91200-30

Logic Truth Table		
RF Position	Logic Signal	
	A	B
Pos 1	1	0
Pos 2	0	1

- 710C70100-30
- 710C70200-30
- 745C90100-30
- 745C90200-30

Logic Truth Table		
RF Position	Logic Signal	
	A	
Pos 1	0	
Pos 2	1	

Coaxial Switch

Type H

Description

The Type H Latching Transfer Switch has RF geometry optimized for TNC and N connectors and operates over a 0-12.4GHz frequency band. The actuator is a magnetic latching type utilizing a current cut-off circuit. It is also available with or without indicating switches. DowKey's design mechanically links indicating switches to the rotating armature for positive indication.

Actuator features:

1. Symmetrical armature
2. Positive latching with permanent magnets.

Magnetic latching offers distinct advantages over other mechanisms since it uses no springs or mechanical detents which are prone to fatigue and wear. DowKey considers magnetic latching to be the optimum design for applications which require high vibration levels, environmental extremes, long life and reliability.

Type	Conn.	Freq.
HO	SMA	18GHz
HT	TNC	12.4GHz
HX	SC	6.5GHz

Standard Products

Pin	Conn	Schematic
300C00100	N	1
300C00200*	N	2
300C30100	TNC	1
300C30200**	TNC	2

* Meets MIL-S-3928/10-10

** Meets MIL-S-3928/21-03

Special Configuration


Actuating Voltage	Mounting Configuration
TTL Logic Circuit	Terminal Location

RF Circuit: Transfer
Actuator: Latching
Connector: N & TNC
Frequency: 0-12.4GHz




Schematic

1. Latching



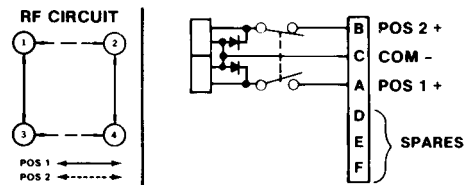


2. Latching w/ Indicator Circuit

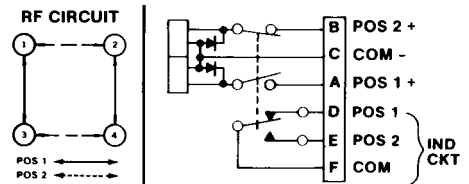



Specifications

Typical RF data of a production switch; computer printouts below:

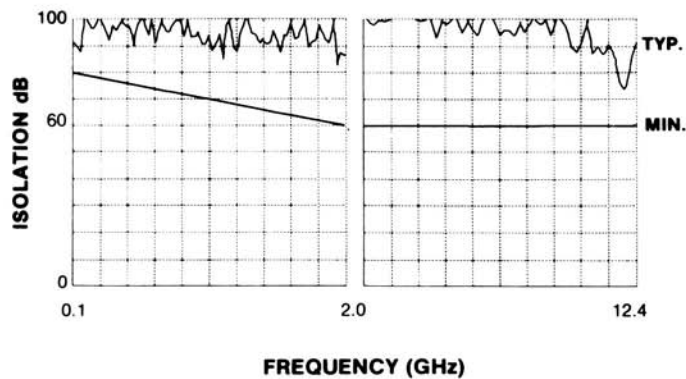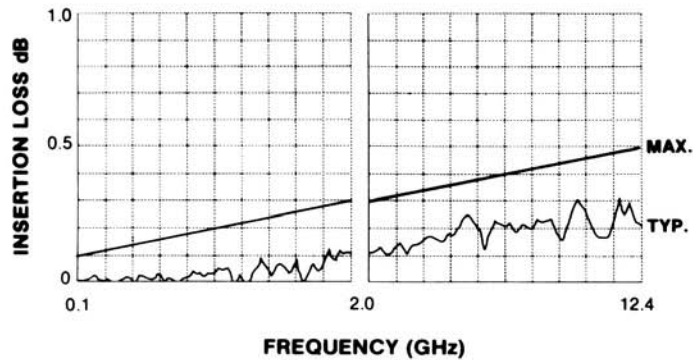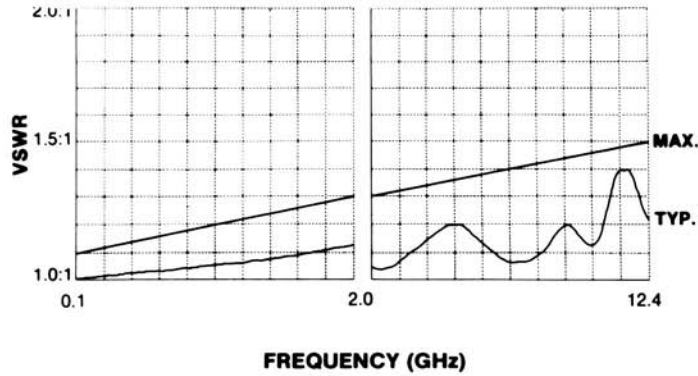

Voltage: 20 to 30Vdc
 Coil Resistance: 45 ± 5 Ohms @ 20°C
 Current: .65 amp max @ 28Vdc and 20°C
 Switching Time: 20 milliseconds max RF to RF
 RF Contacts: break-before-make
 Impedance: 50 Ohms nominal
 Temperature: -55°C to 85°C
 Vibration: 20g's sine/random
 Life: 100,000 cycles min
 Weight: 12 oz.

Dimensions

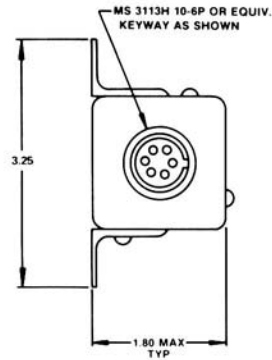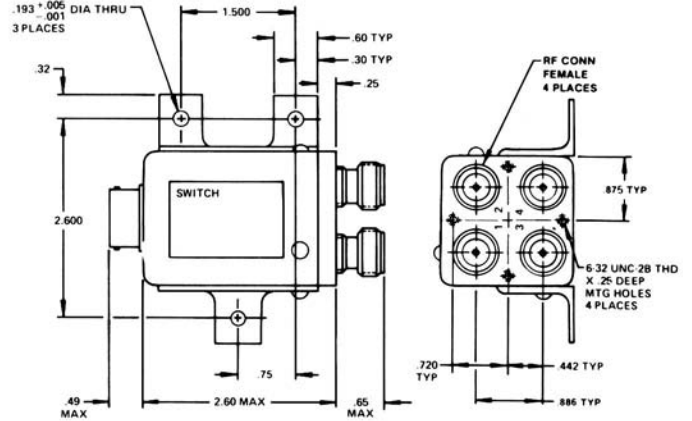

Lower Frequency

At 10MHz, typical values are:

Isolation: 100dB

VSWR: 1.05:1

Insertion Loss: 0.05dB

Because of the inherently good RF performance at lower frequencies, this product line is not tested below 2GHz except upon request.

Coaxial Switch

Type H

Description

The Type H failsafe Transfer switch has RF geometry optimized for Type N and TNC connectors and operates over a 0-12.4GHz frequency band. It is available with or without indicating switches. DowKey's design mechanically links indicating switches to the rotating armature for positive indication.

A proven failsafe actuator is utilized to provide reliable performance in applications where the simplicity of failsafe operation is desired.

This switch is part of a DowKey family of switches. Other types in this family are referenced below.

Type	Conn.	Freq.
HO	SMA	18GHz
HT	TNC	12.4GHz
HX	SC	6.5GHz

Standard Products

P/N	Conn	Schematic
310C00100	N	1
310C00200*	N	2
310C30100	TNC	1
310C30200	TNC	2

Other Products

P/N	Schematic
310C30800**	3

with solder terminals
 *Meets MIL-S-3928/10-08
 ** Meets Mil-S-3928/21-02

Special Configuration


Actuating Voltage	TTL Logic Circuit
Transient Current	Terminal Location
Mounting Configuration	

RF Circuit: Transfer
Actuator: Failsafe
Connector: N & TNC
Frequency: 0-12.4GHz




Schematic


#1. Failsafe

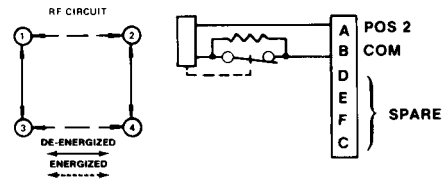

2. Failsafe with Indicator Circuit



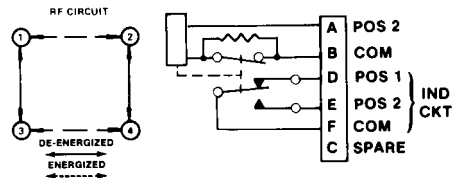


3. Failsafe with Indicator and Solder Terminal

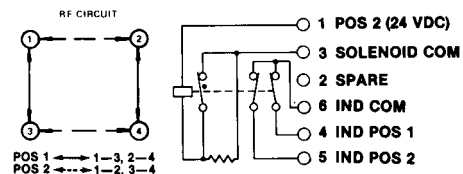



Specifications

Typical RF data of a production switch; computer printouts below:

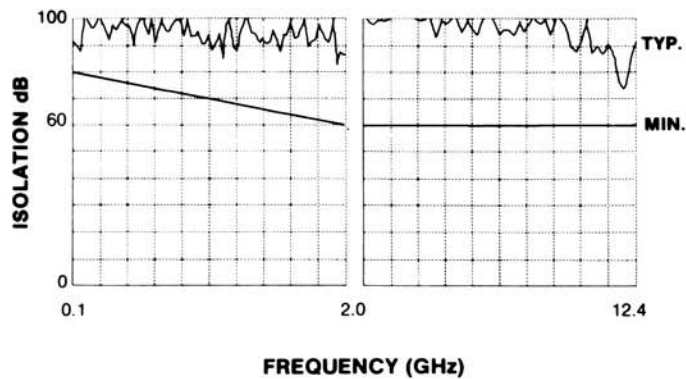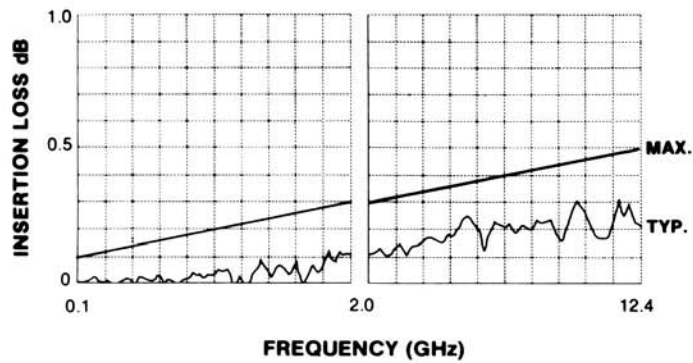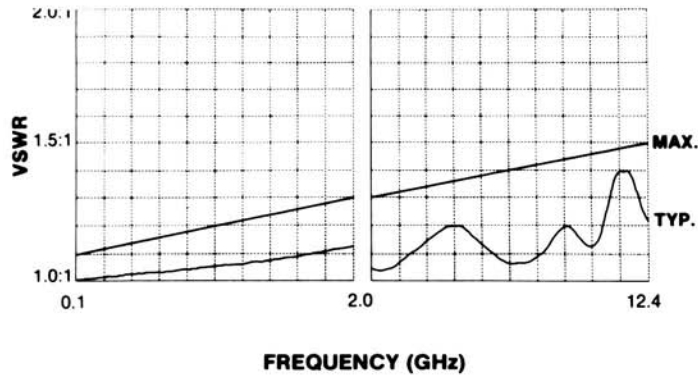

Actuator Voltage: 20 to 30Vdc
 Current: 1.0 amp max. @ 28Vdc and 20°C
 Switching Time: 20 milliseconds max RF to RF
 RF Contacts: break-before-make
 Impedance: 50 Ohms nominal
 Temperature: -55°C to 85°C
 Vibration: 20g's sine/random
 Life: 100,000 cycles min
 Weight: 12 oz. max.

Dimensions

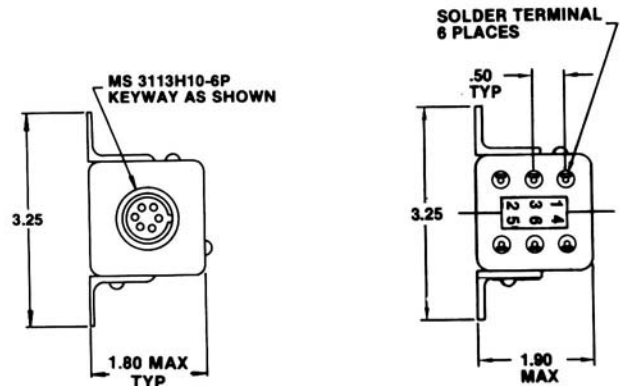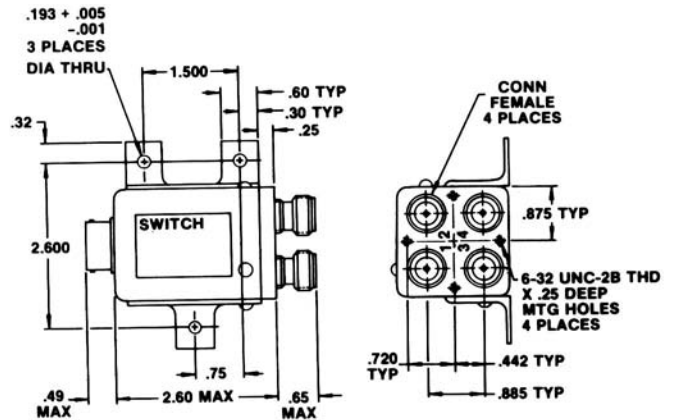

Lower Frequency

At 10MHz, typical values are:

Isolation: 90dB

VSWR: 1.05:1

Insertion Loss: 0.05dB

Because of the inherently good RF performance at lower frequencies, this product line is not tested below 2GHz except upon request.

Coaxial Switch

Type HT

Description

The Type HT Coaxial Switch has RF geometry optimized for TNC connectors and operates over a 0-12.4GHz frequency band. The model HT is available in latching or failsafe models. It offers TNC connectors in the smallest possible package. Both models are available with or without indicators. DowKey's design mechanically links indicating switches to the rotating armature for positive indications.

The latching models use a magnetic latching actuator featuring a balanced rotating armature and a current cut-off circuit. Current is required for only 30 milliseconds to change position; no holding power is required.

The failsafe models feature dual holding power...a permanent magnet plus electromagnet for low current with high efficiency.

This switch is part of the DowKey family of switches. Other types in this family are referenced below.

Type	Conn.	Freq.
H	N	12.4 GHz
HO	SMA	18 GHz
HX	SC	6.5 GHz

Standard Products

P/N	Schematic
700C30100	1
700C30200*	2
710C30100	3
710C30200	4

* Meets MIL-S-3928/21-01

Special Configuration


Actuating Voltage	TTL Logic Circuit
Terminal Location	Mounting Configuration

RF Circuit: Transfer
Actuator: Latching and Failsafe
Connector: TNC
Frequency: 0-12.4GHz




Schematic


#1. Latching

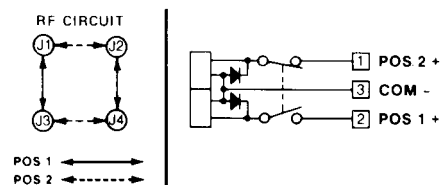


2. Latching with Indicator Circuit

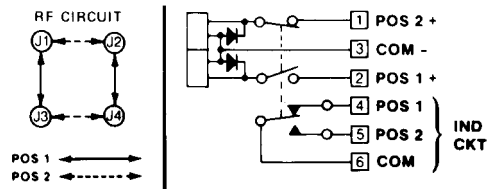

3. Failsafe



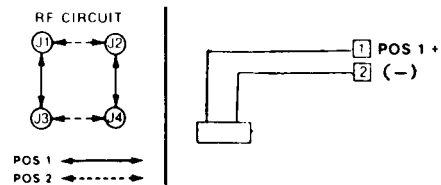


4. Failsafe w/ Indicator Circuit

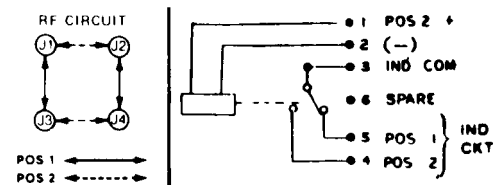

Specifications

Typical RF data of a production switch; computer printouts below:

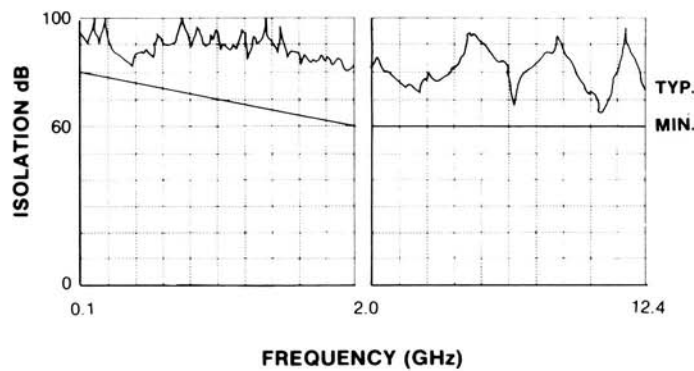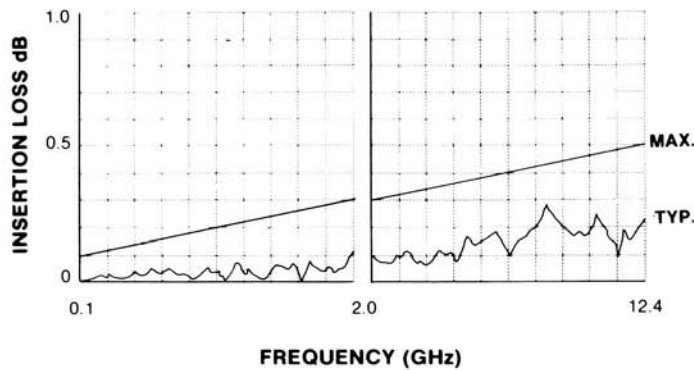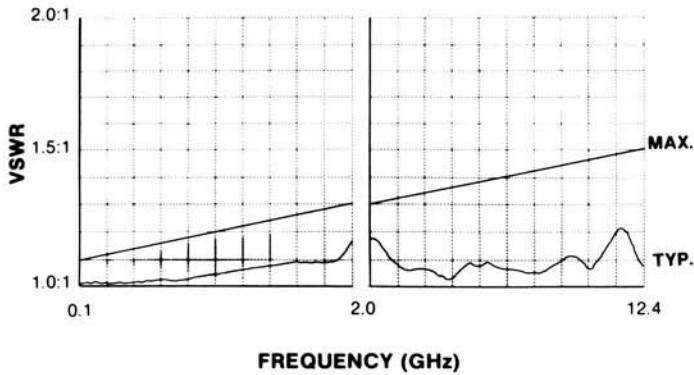

Lower Frequency

At 10MHz, typical values are:

Isolation: 100dB

VSWR: 1.05:1

Insertion Loss: 0.05dB

Because of the inherently good RF performance at lower frequencies, this product line is not tested below 2GHz except upon request.

Failsafe Models

Coil Resistance: 250 ± 25 Ohms @ 20°C

Current: 120mA @ 28Vdc and 20°C

Latching Models

Coil Resistance: 500 ± 50 Ohms @ 20°C

Current: 65mA @ 28Vdc and 20°C

Voltage: 20 to 30Vdc

Switching Time: 20 milliseconds max RF to RF

RF Contacts: break-before-make

Impedance: 50 Ohms nominal



Temperature: -55°C to 85°C

Vibration: 20g's sine/random

Life: 100,000 cycles min

Weight: 3.5 oz. max.

Dimensions

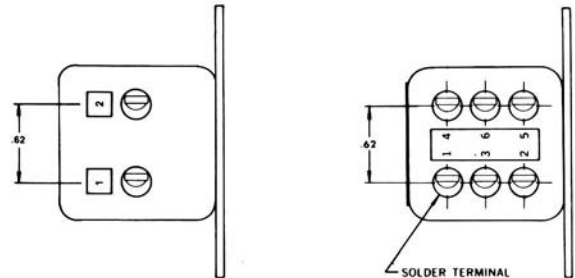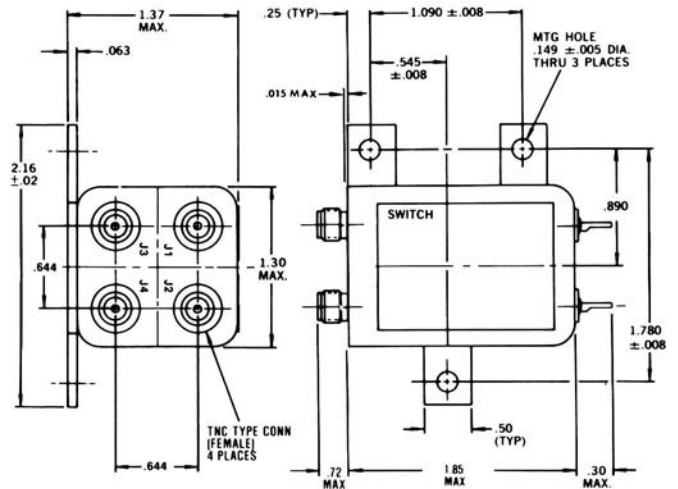

**Mating connector
to be 5/8" diameter**

Coaxial Switch

Type HX

Description

The Type HX Coaxial Switches are designed for high average power applications over a 0-6.5GHz frequency band. They use SC connectors and are available in latching or failsafe models, with or without indicators.

These switches utilize HCl (heat conducting dielectric*) to increase the average power handling capabilities. Test results on a large number of components employing HCl have consistently indicated a CW power rating 2.5 times greater than obtainable with conventional low-loss dielectric materials.

Latching models use a magnetic latching actuator featuring a balance rotating armature. Current is required for only 40 milliseconds to change position; no holding power is required.

Failsafe models feature dual holding power provided by a permanent magnet plus an electromagnet for low current with high efficiency.

This switch is part of a DowKey family of switches. Other types in this family are referenced below.

Type	Conn.	Freq.
H	N	12.4 GHz
HO	SMA	1.8 GHz
HT	TNC	12.4GHz

Standard Products

P/N	Schematic
300C51100	1
300C51200	2
310C51100	3
310C51200	4

Meets MIL-S-3928

* Transco developed proprietary material

Special Configuration


- Actuating Voltage
- Mounting Configuration
- Actuator Cut-off Circuit

RF Circuit: Transfer High Power
Actuator: Latching and Failsafe
Connector: SC
Frequency: 0-6.5GHz




Schematic


#1. Pulse Latching

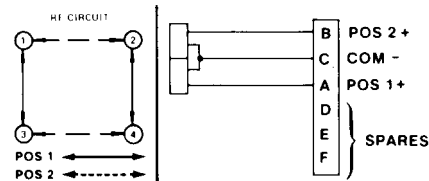


2. Pulse Latching with Indicator

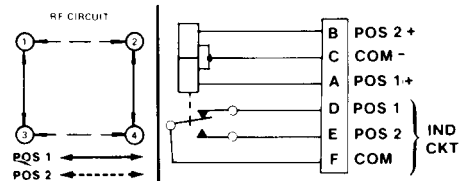

3. Failsafe




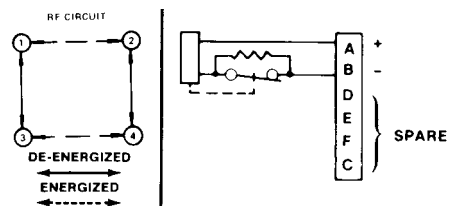


4. Failsafe w/ Indicator

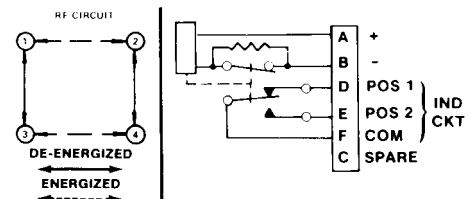

Specifications

Typical RF data of a production switch; computer printouts below:

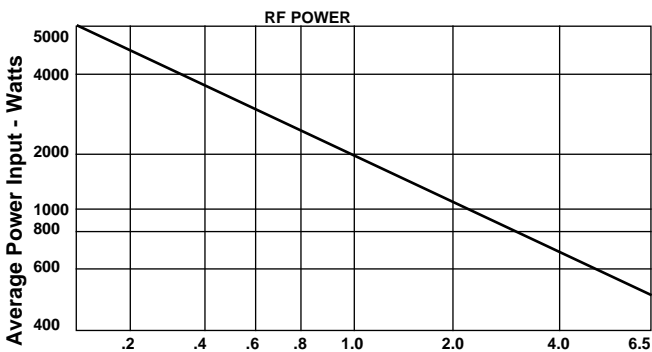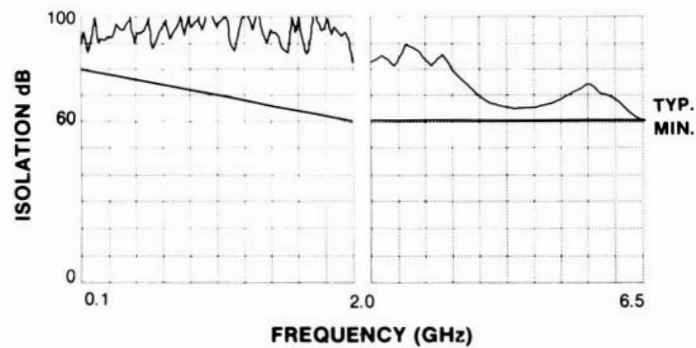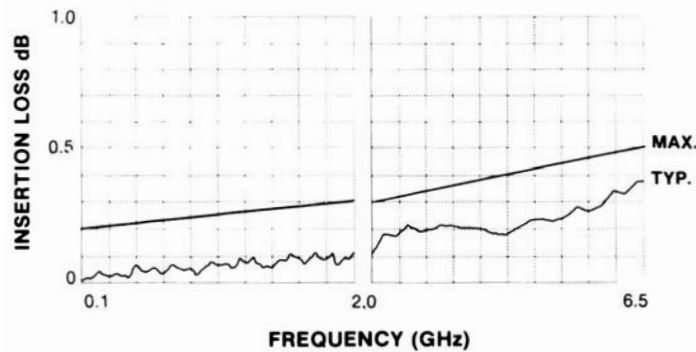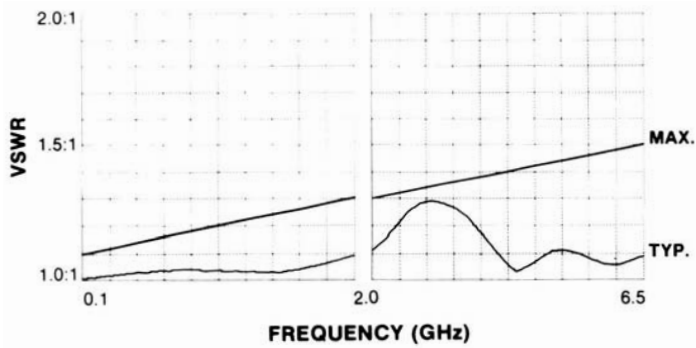

1500 Watts Average At 1 GHz

Voltage: 22 to 30Vdc
 Switching Time: 20 milliseconds max @ 28Vdc
 RF Contacts: break-before-make
 Impedance: 50 Ohms nominal
 Temperature: -55°C to 85°C
 Vibration: 10g's sine/random
 Life: 100,000 cycles min
 Weight: 12.5 oz. max.

Latching Models

300C51100 and 300C51200

Current: .65 amp @ 28Vdc and 20°C



failsafe Models

310C51100 and 310C51200

Current Pull-in: 1.1 amp max @ 28Vdc and 20°C

Current Holding: 270 mA max @ 28Vdc and 20°C

Dimensions

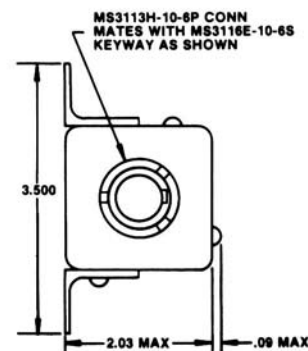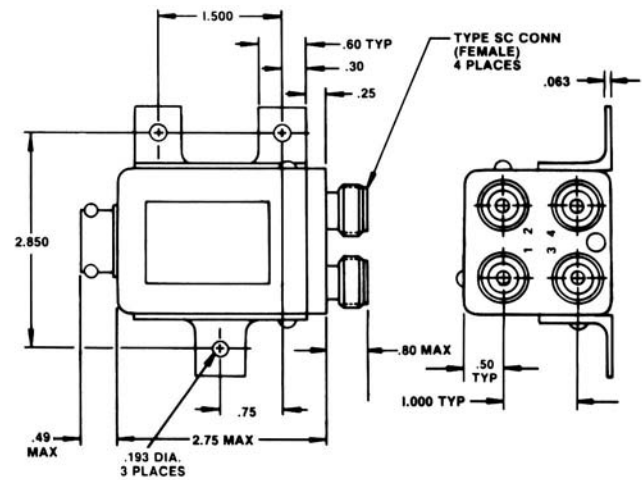

Lower Frequency

At 10MHz, typical values are:

Isolation: 100dB

VSWR: 1.05:1

Insertion Loss: 0.05dB

Because of the inherently good RF performance at lower frequencies, this product line is not tested below 2GHz except upon request.

Coaxial Switch

Type MO

Description

The Type MO SP3T to SP6T switch utilizes selective linear actuators for each position. RF geometry is optimized for SMA connectors and operates over a 0-18GHz frequency band. Individual solenoids mean faster switching time...no waiting for the switch to sequence through a number of positions before stopping at the selected position. Separate "selective" solenoids provide positive action and a low actuator current requirement.

This switch is part of a DowKey family of switches. Other types in this family are referenced below:

Type	Conn.	Freq.
M	N & TNC	12.4 GHz
MX	SC	6.5 GHz
ML	N & TNC	12.4GHz

Standard Products

P/N	Schematic	
143C70600	1	
144C70600	2	
145C70600	3	
146C70600*	4	
146C70600-30	5	TTL Logic

* Meets MIL-S-3928/18-02

Special Configuration

Actuating Voltage Mounting Configuration
 Transient Circuit Terminal Location
 TTL Logic Circuit

(For dimensions and circuit diagrams see page 144)



RF Circuit: SP3T to SP6T


Actuator: *Selective with Solder Terminals

Connector: SMA


Frequency: 0-18GHz

Schematic


#1. 3 POS

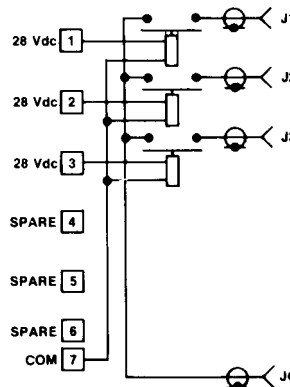


#2. 4 POS

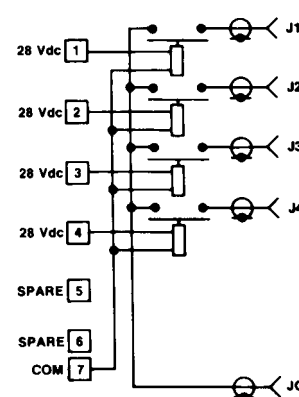


#3. 5 POS

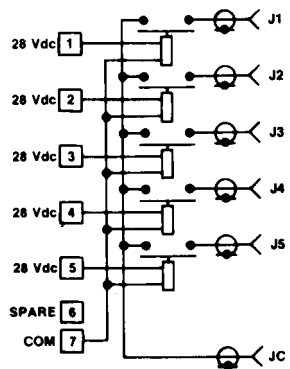

#4. 6 POS



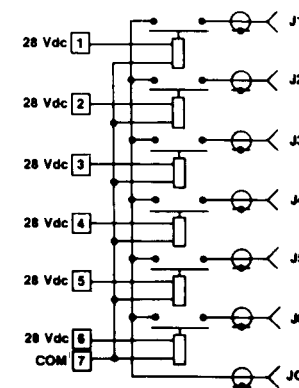


#5. 146C70600-30

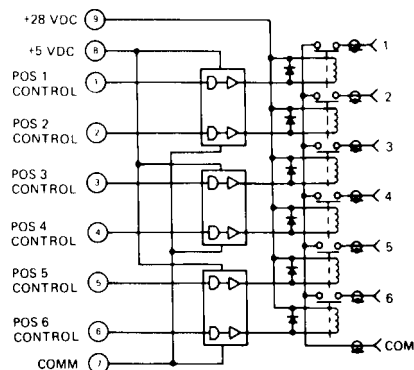

Specifications


Typical RF data of a production switch; computer printouts below:

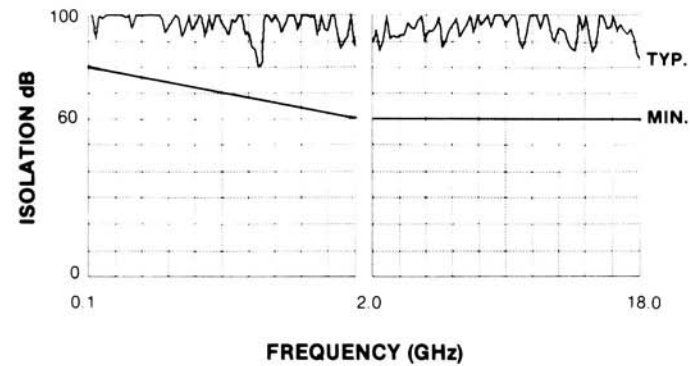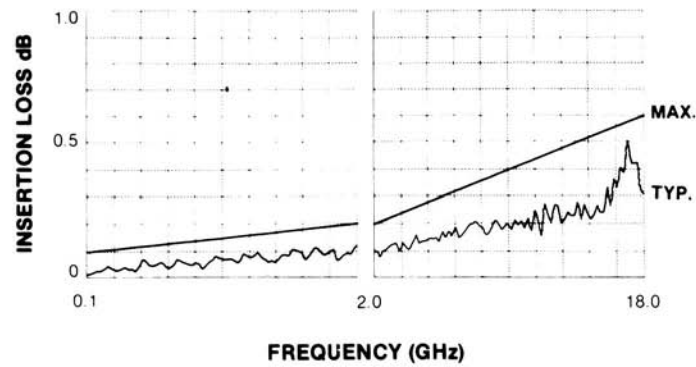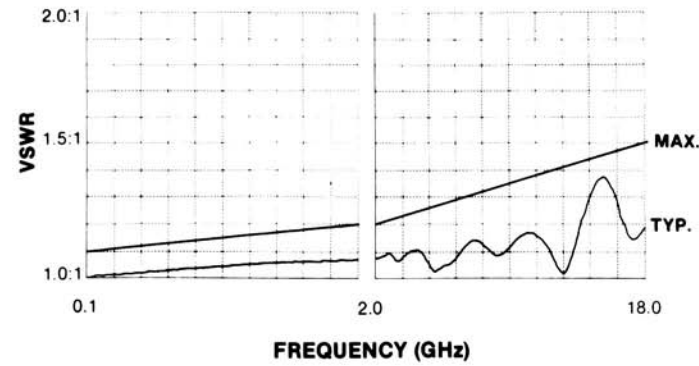

Control Input Logic Table					RF Conn	
1	2	3	4	5	6	RF Com To
0	0	0	0	0	0	Open
1	0	0	0	0	0	RF 1
0	1	0	0	0	0	RF 2
0	0	1	0	0	0	RF 3
0	0	0	1	0	0	RF 4
0	0	0	0	1	0	RF 5
0	0	0	0	0	1	RF 6

- Voltage: 20 to 30Vdc
- Coil Resistance: 205 ± 15 Ohms @ 20°C
- Current: 170mA max @ 28Vdc and 20°C
- Switching Time: 20 milliseconds max @ 28Vdc and 20°C
- Impedance: 50 Ohms nominal
- Temperature: -55°C to 85°C
- Vibration: 10g's sine/random
- Life: 1,000,000 cycles min
- Weight: 5.5 oz. max for the SP6T

Dimensions

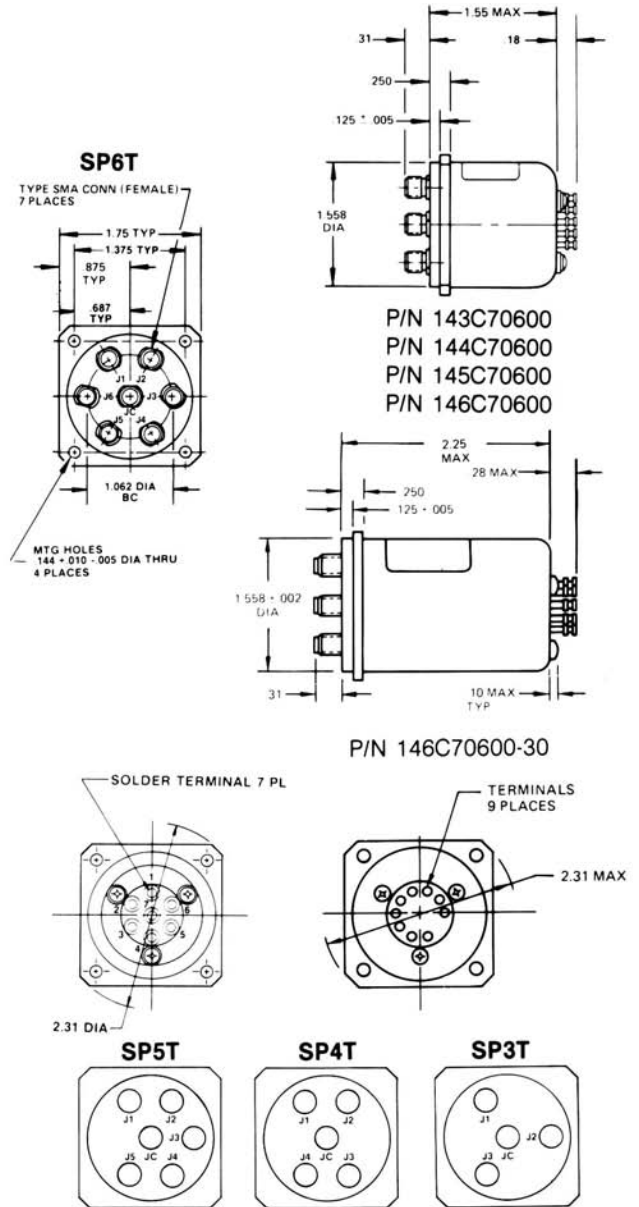

Lower Frequency

At 10MHz, typical values are:
 Isolation: 100dB
 VSWR: 1.05:1
 Insertion Loss: 0.05dB
 Because of the inherently good RF performance at lower frequencies, this product line is not tested below 2GHz except upon request.

Coaxial Switch

Type MOI

Description

The Type MOI SP3T to SP6T switch utilizes selected linear actuators for each position. RF geometry is optimized for SMA connectors and operates over a 0-18GHz frequency band. Individual solenoids mean faster switching time...no waiting for the switch to sequence through a number of positions before stopping at the selected position. Separate "selective" solenoids provide positive action and a low actuator current requirement. These switches are supplied with indicating switches that are mechanically linked to each solenoid for positive position indication.

This switch is part of a DowKey family of switches. Other types in this family are referenced below

Type	Conn.	Freq.
M	N &TNC	12.4 GHz
MX	SC	6.5 GHz
ML	N &TNC	12.4GHz
MO	SMA	18GHz

Standard Products

P/N	Schematic
143C71300	1
144C71300	2
145C71300	3
146C71300	4

Meets MIL-S-3928

Special Configuration

Actuating Voltage	TTL Logic Circuit
Transient Circuit	Power Connector


RF Circuit: SP3T to SP6T (w/ Indicator)

Actuator: *Selective

Connector: SMA


Frequency: 0-18GHz

* Solenoid for each RF position

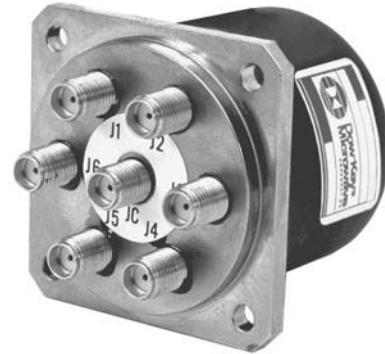


Schematic


#1. 3 POS




2. 4 POS



3. 5 POS



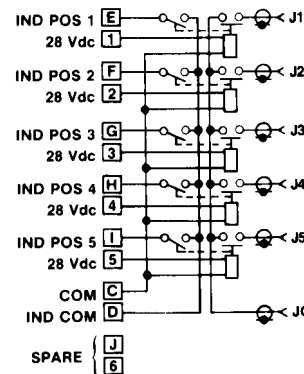


4. 6 POS

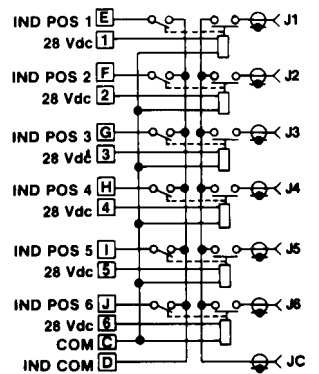

Specifications

Typical RF data of a production switch; computer printouts below:

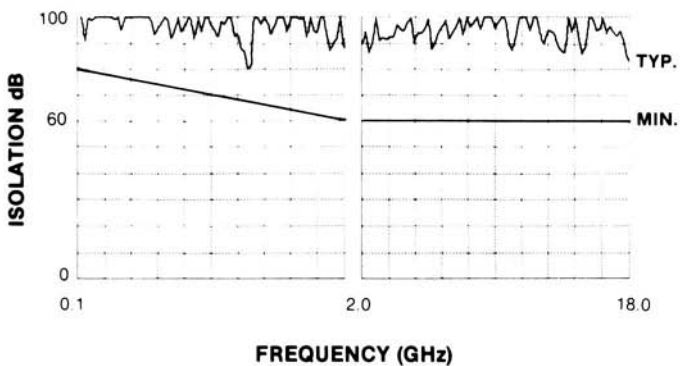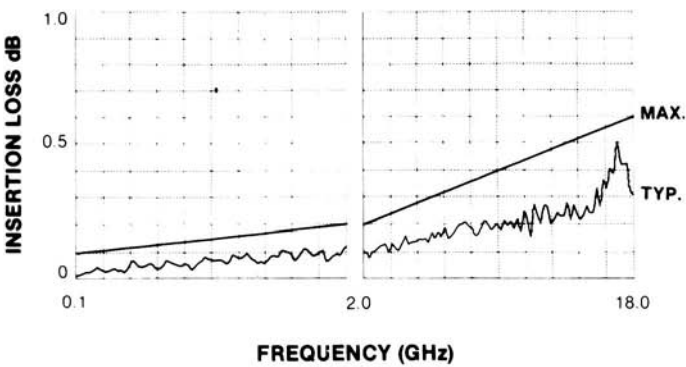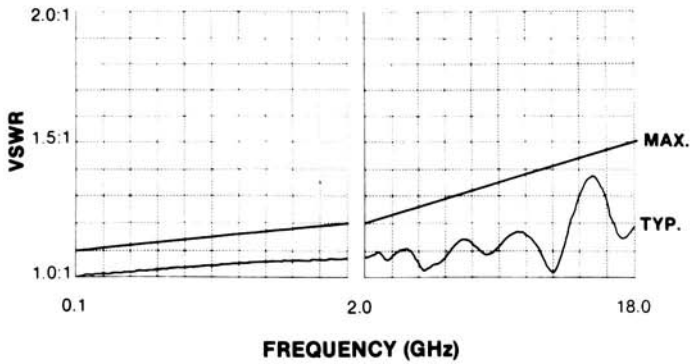

Lower Frequency

At 10MHz, typical values are:

Isolation: 100dB


VSWR: 1.05:1

Insertion Loss: 0.05dB

Because of the inherently good RF performance at lower frequencies, this product line is not tested below 2GHz except upon request.

Voltage: 24 to 30Vdc
 Coil Resistance: 205 ± 15 Ohms @ 20°C
 Current: 170mA max @ 28Vdc and 20°C
 Switching Time: 20 milliseconds @ 28Vdc and 20°C
 Impedance: 50 Ohms nominal
 Temperature: -55°C to 85°C
 Vibration: 20g's sine/random
 Life: 1,000,000 cycles min
 Weight: 5.5 oz. max for the SP6T

Dimensions

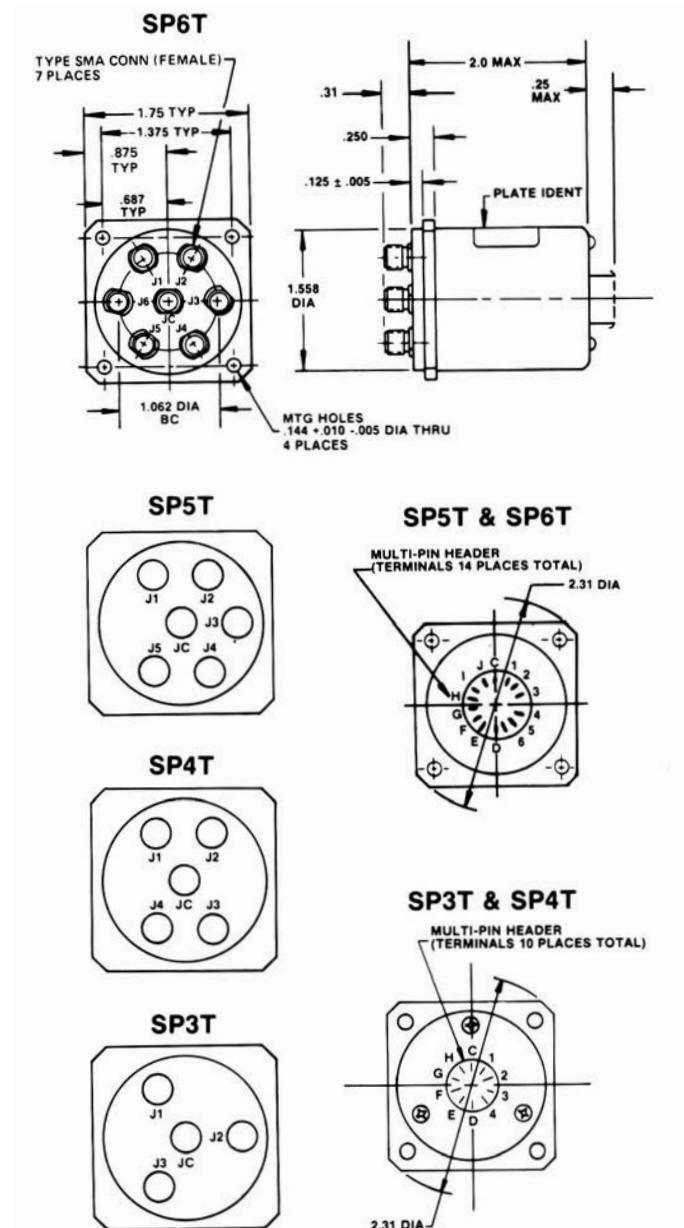

Coaxial Switch

Type MO

Description

The Type MO SP3T to SP6T switch utilizes selected linear actuators for each position. RF geometry is optimized for 3.5mm connectors and operates over a 0-26.5GHz frequency band. Individual solenoids mean faster switching time...no waiting for the switch to sequence through a number of positions before stopping at the selected position. Separate "selective" solenoids provide positive action and a low actuator current requirement.

RF Circuit: SP3T to SP6T

Actuator: Selective with Solder Terminals*

Connector: 3.5mm**

Frequency: 0-26.5GHz


Standard Products

P/N	Schematic	Type
153C90600	1	Selective 3 pos.
154C90600	2	Selective 4 pos.
155C90600	3	Selective 5 pos.
156C90600	4	Selective 6 pos.

Meets MIL-S-3928


Special Configuration

Actuating Voltage
Transient Circuit
TTL Logic Circuit

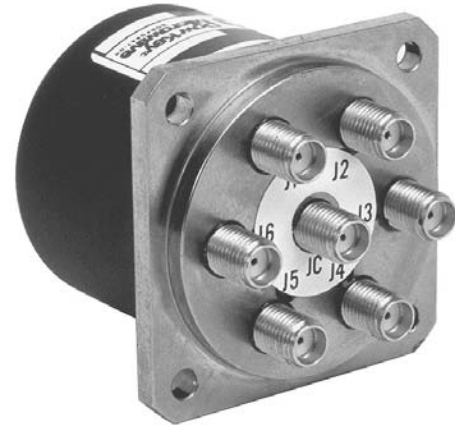


Schematic


#1. 3 POS

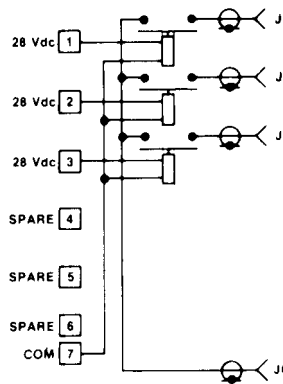


2. 4 POS

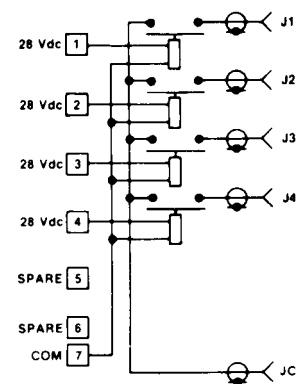

3. 5 POS

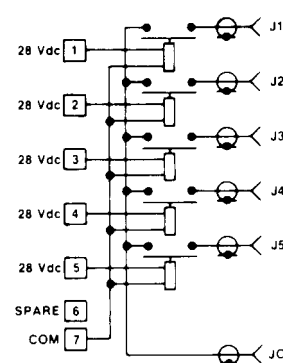

4. 6 POS

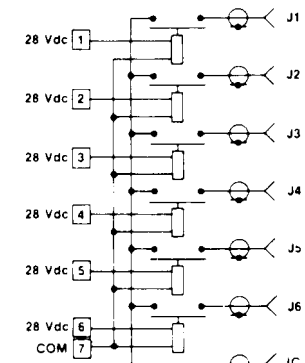


Specifications


* Solenoid for each RF position

** Mates with SMA


RF Characteristics

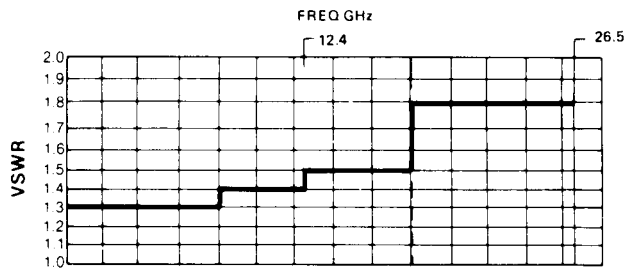

VSWR MAX.

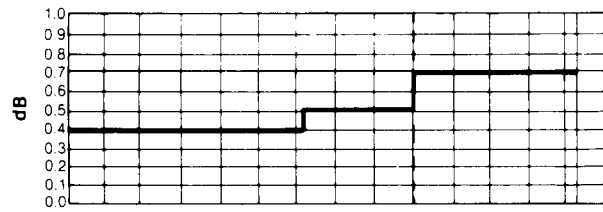


INSERTION LOSS MAX.

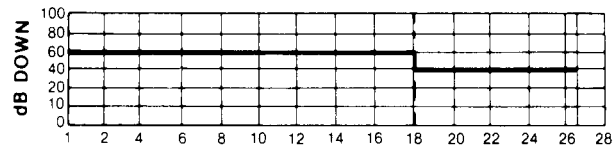

ISOLATION MIN.

Voltage: 20 to 30Vdc
 Coil Resistance: 205 ± 15 Ohms @ 20°C
 Current: 170mA max @ 28Vdc and 20°C
 Switching Time: 20 milliseconds @ 28Vdc and 20°C
 Impedance: 50 Ohms nominal
 Temperature: -55°C to 85°C
 Vibration: 10g's sine/random
 Life: 1,000,000 cycles min
 Weight: 5.5 oz. max for the SP6T

Dimensions

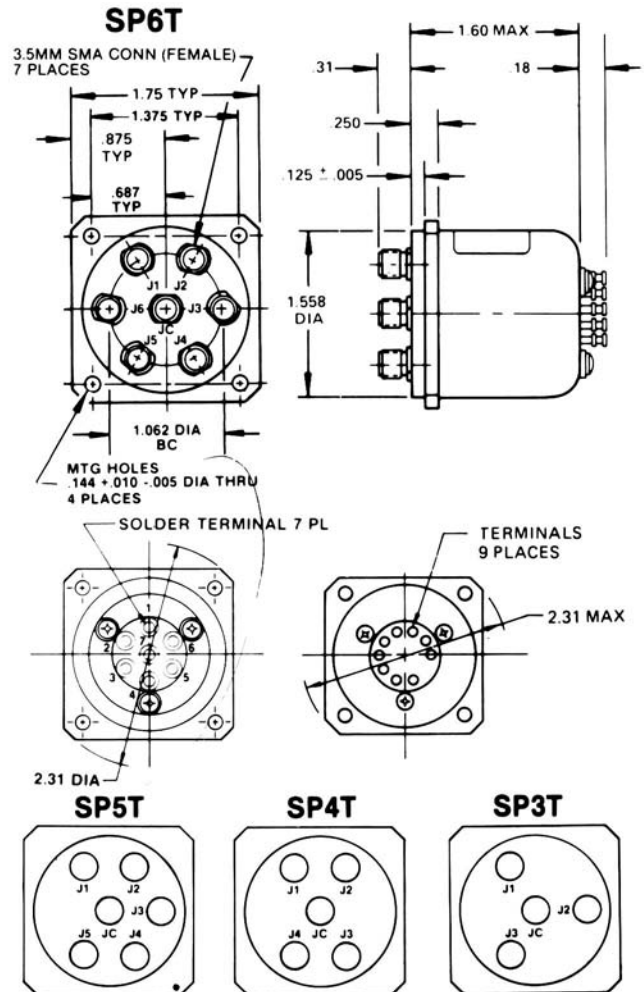

Lower Frequency

At 10MHz, typical values are:

Isolation: 100dB

VSWR: 1.05:1

Insertion Loss: 0.05dB

Because of the inherently good RF performance at lower frequencies, this product line is not tested below 2GHz except upon request.

Coaxial Switch

Type M

Description

The Type M SP3T to SP6T switch utilizes selected linear actuators for each position. RF geometry is optimized for N and TNC connectors and operates over a 0-12.4GHz frequency band. Individual solenoids mean faster switching time...no waiting for the switch to sequence through a number of positions before stopping at the selected position. Separate "selective" solenoids provide positive action and a low actuator current requirement.

This switch is part of the DowKey family of switches. Other types in this family are referenced below.

RF Circuit: SP3T to SP6T
Actuator: *Selective
Connector: N and TNC
Frequency: 0-12.4GHz



Type	Conn.	Freq.
MX	SC	6.5 GHz
ML	N &TNC	12.4GHz
MO	SMA	18GHz

Designed to meet MIL-S-3928

Standard Products

P/N	Schematic	Conn	Ind Ckt
133C00100	1	N	NO*
133C00200	1	N	YES
133C30100	1	TNC	NO*
133C30200	1	TNC	YES
134C00100	2	N	NO*
134C00200	2	N	YES
134C30100	2	TNC	NO*
134C30200	2	TNC	YES
135C00100	3	N	NO*
135C00200	3	N	YES
135C30100	3	TNC	NO*
135C30200	3	TNC	YES
136C00100	4	N	NO*
136C00200	4	N	YES
136C30100	4	TNC	NO*
136C30200	4	TNC	YES

* Indicator circuit pins are spare on units without indicator circuits

Special Configuration


115 Vac
 Solder Terminals

Other Products


Face mount and face mount with indicator switches

Schematic


#1. SP3T w/Indicator




2. SP4T w/Indicator

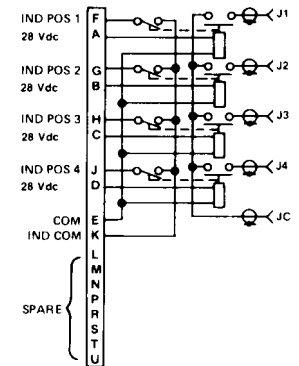

3. SP5T w/Indicator

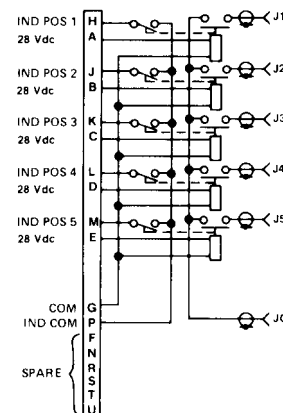




4. SP6T w/Indicator

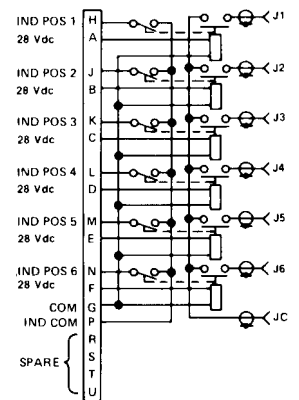

Specifications


Typical RF data of a production switch; computer printout below:

TNC data shown

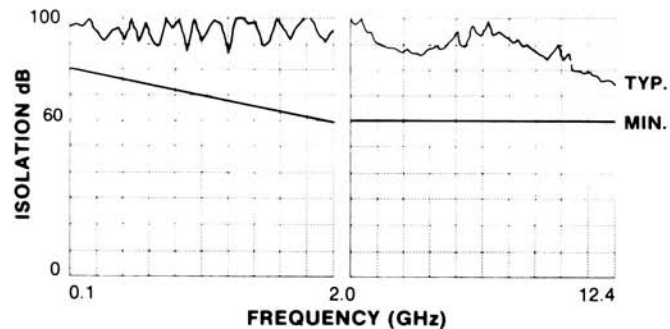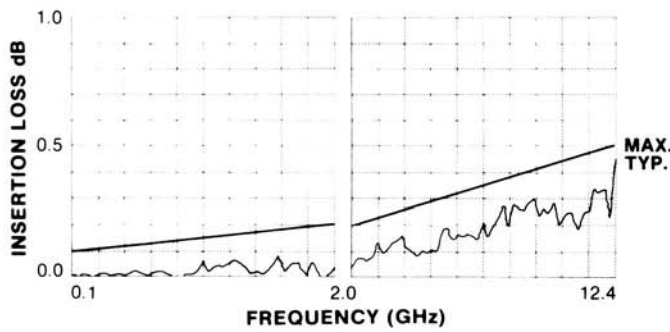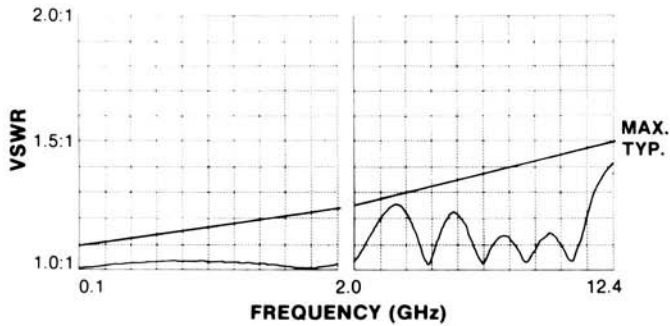

Voltage: 20 to 30Vdc
 Coil Resistance: 205 ± 15 Ohms @ 20°C
 Current: 170mA max @ 28Vdc and 20°C
 Switching Time: 20 milliseconds @ 28Vdc and 20°C
 Impedance: 50 Ohms nominal
 Temperature: -55°C to 85°C
 Vibration: 10g's sine/random
 Life: 100,000 cycles min
 Weight: 16 oz max for the SP6T and ind ckt

Dimensions

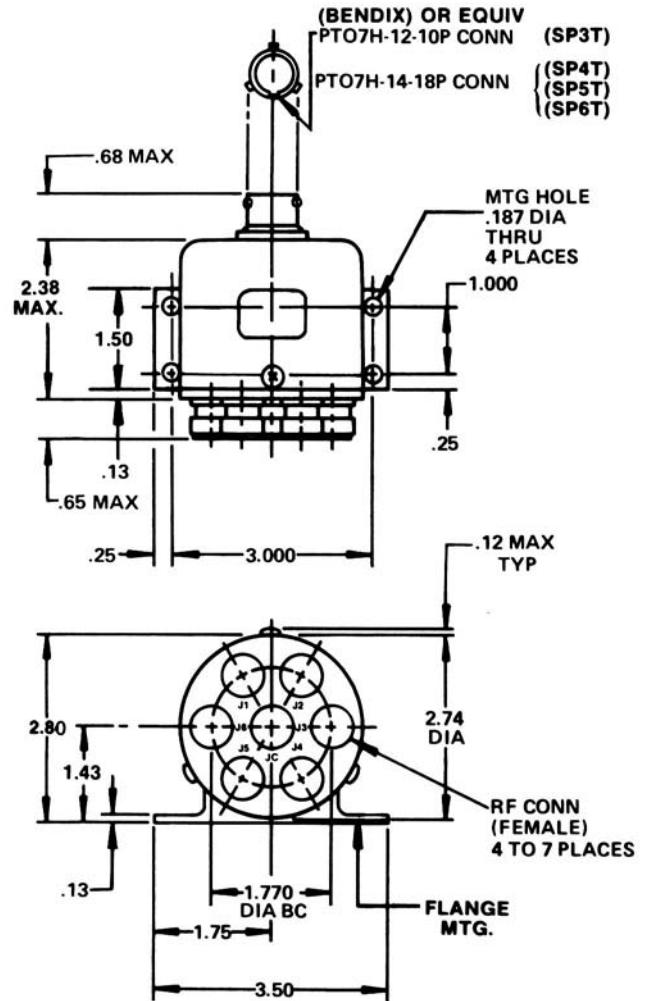

Lower Frequency

At 10MHz, typical values are:

Isolation: 100dB

VSWR: 1.05:1

Insertion Loss: 0.05dB

Because of the inherently good RF performance at lower frequencies, this product line is not tested below 2GHz except upon request.

Coaxial Switch

Type MX

Description

The Type MX coaxial switches are designed for high average power applications over a frequency band 0-6.5GHz. They use SC connectors, one-inch center-to-center spacing.

These switches utilize HCl (heat conducting dielectric) to increase the average power handling capabilities. Test results on a large number of components employing HCl have consistently indicated a CW power rating 2.5 times greater than obtainable with conventional low-loss dielectric materials.

The Type MX SP3T to SP6T switch utilizes selected linear actuators for each position. Individual solenoids mean faster switching time...no waiting for the switch to sequence through a number of positions before stopping at the selected position. These switches are available with or without mechanically activated indicating switches, giving positive position indication.

This switch is part of a DowKey family of switches. Other types in this family are referenced below.

RF Circuit: SP3T to SP6T
Actuator: Selective
Connector: SC
Frequency: 0-6.5GHz



Type	Conn.	Freq.
M	N & TNC	12.4GHz
ML	N & TNC	12.4GHz
MO	SMA	18GHz

Designed to meet MIL-S-3928
 * Transco developed proprietary material



Schematic

#1. SP3T w/Indicator

2. SP4T w/Indicator



Standard Products

P/N	Pos	Schematic	Ind Ckt
133C51100	3	1	NO
133C51200	3	1	YES
134C51100	4	2	NO
134C51200	4	2	YES
135C51100	5	3	NO
135C51200	5	3	YES
136C51100	6	4	NO
136C51200	6	4	YES







3. SP5T w/Indicator

4. SP6T w/Indicator

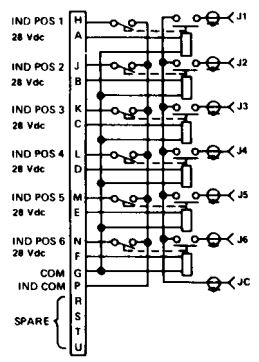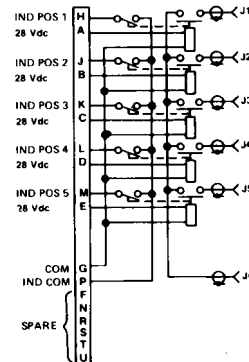


Specifications

Typical RF data of a production switch; computer printout below:

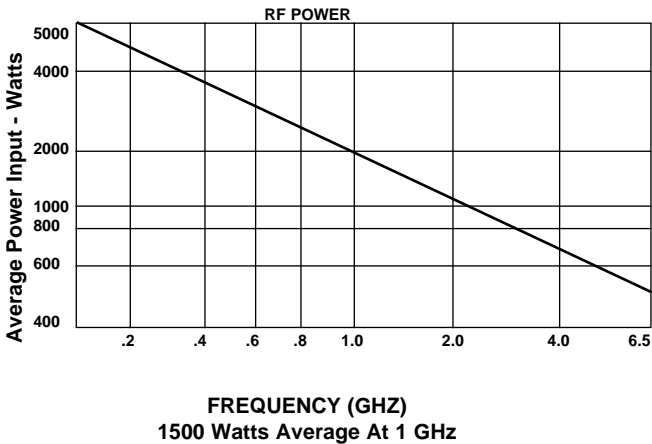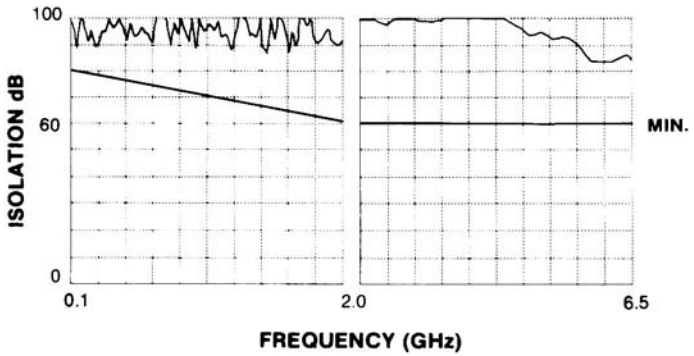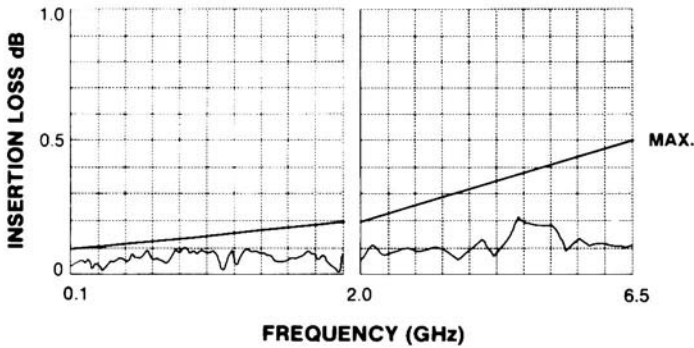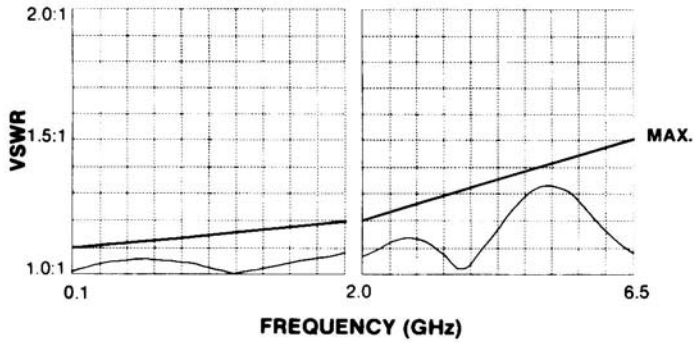

- Voltage: 22 to 30Vdc
- Coil Resistance: 210 ± 15 Ohms @ 20°C
- Current: 170mA max @ 28Vdc and 20°C
- Switching Time: 20 milliseconds @ 28Vdc and 20°C
- Impedance: 50 Ohms nominal
- Temperature: -55°C to 85°C
- Vibration: 10g's sine/random
- Life: 100,000 operations min - each pos
- Weight: 18.5 oz (136C51100)

Dimensions

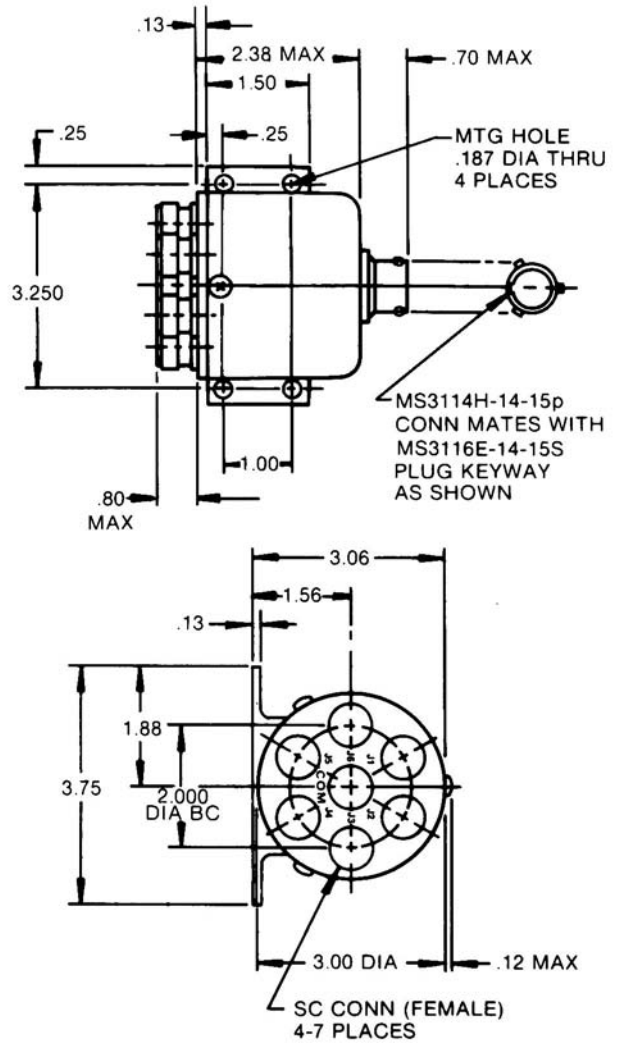

Lower Frequency

At 10MHz, typical values are:
 Isolation: 80dB
 VSWR: 1.05:1
 Insertion Loss: 0.05dB
 Because of the inherently good RF performance at lower frequencies, this product line is not tested below 2GHz except upon request.

Cross Reference Guide

Transco Products, Inc. Switches listed in MIL-S-55041C

SP2T Failsafe

Specification Sheet	Option No.	TPI Part No.	FSN 5985
MIL-S-55041/3A	/3-001	35D02800	-
	/3-002	32C01200	-
	/3-005	33D01300	-
	/3-006	33D00300	01-039-8434

Transfer Latching

Specification Sheet	Option No.	TPI Part No.	FSN 5985
MIL-S-55041/4A	/4-001	33C00500	-
	/4-002	33D00200	00-009-4530

1P2T Failsafe

Specification Sheet	Option No.	TPI Part No.	FSN 5985
MIL-S-55041/6A	/6-001	33C12500	-

2P2T Failsafe

Specification Sheet	Option No.	TPI Part No.	FSN 5985
MIL-S-55041/7A	/7-001	33D00100-10	-
	/7-002	33D01100	-

1P2T Latching

Specification Sheet	Option No.	TPI Part No.	FSN 5985
MIL-S-55041/11	/11-001	33D08400	01-073-1529
	/11-002	33D06400	-
	/11-003	33D04400	-
	/11-004	33D03400	01-099-6613 00-009-3159
	/11-005	33D00400	-

Reference Table of Rigid Rectangular Wavetable Data and Fittings

EIA WG DESIGNATION WR ()	RECOMMENDED OPERATE RANGE FOR TE ₁₀ MODE		CUT-OFF FOR FOR TE ₁₀ MODE		RANGE IN $\frac{2\lambda}{\lambda_c}$	RANGE IN $\frac{\lambda_g}{\lambda}$	THEORETICAL PEAK POWER RATING LOWEST TO HIGHEST FREQUENCY MEGAWATTS	THEORETICAL ATTENUATION LOWEST TO HIGHEST FREQUENCY	JAN FLANGE DESIG.			DIMENSIONS (inches)				WALL THICKNESS NOMINAL		
	FREQUENCY GHZ	WAVELENGTH (cm)	FREQUENCY GHZ	WAVELENGTH (cm)					MATERIAL ALLOY	JAN WG DESIGNATION RG()/U	CHOKE UG ()/U	COVER UG ()/U	EIA WG DESIGNATION WR ()	INSIDE	TOL.		OUTSIDE	TOL.
2300	0.32-0.49	93.68-61.18	0.256	116.84	1.60-1.05	1.68-1.17	153.0-212.0	.051-.031	Alum.				2300	23.000-11.500	+ .020	23.250-11.750	+ .020	0.125
2100	0.35-0.53	85.65-56.56	0.281	106.68	1.62-1.06	1.68-1.18	120.0-173.0	.054-.034	Alum.				2100	21.000-10.500	+ .020	21.250-10.750	+ .020	0.125
1800	0.41-0.625	73.11-47.96	0.328	91.44	1.60-1.05	1.67-1.18	93.4-131.9	.056-.038	Alum.	201			1800	18.000-9.000	+ .020	18.250-9.250	+ .020	0.125
1500	0.49-0.75	61.18-39.97	0.393	76.20	1.61-1.05	1.62-1.17	67.6-93.3	.069-.050	Alum.	202			1500	15.000-7.500	+ .015	15.250-7.750	+ .015	0.125
1150	0.64-0.96	46.84-31.23	0.513	58.42	1.60-1.07	1.82-1.18	35.0-53.8	.128-.075	Alum.	203			1150	11.500-5.750	+ .015	11.750-6.000	+ .015	0.125
975	0.75-1.12	39.95-26.76	0.605	49.53	1.61-1.08	1.70-1.19	27.0-38.5	.137-.095	Alum.	204			975	9.750-4.875	+ .010	10.000-5.125	+ .010	0.125
770	0.96-1.45	31.23-20.67	0.766	39.12	1.60-1.06	1.66-1.18	17.2-24.1	.201-.136	Alum.	205			770	7.700-3.850	+ .005	7.950-4.100	+ .005	0.125
650	1.12-1.70	26.76-17.63	0.908	33.02	1.62-1.07	1.70-1.18	11.9-17.2	.317-.212	Brass	69	417A		650	6.500-3.250	+ .005	6.660-3.410	+ .005	0.080
510	1.45-2.20	20.67-13.62	1.157	25.91	1.60-1.05	1.67-1.18	7.5-10.7	.269-.178	Alum.	103	418A		510	5.100-2.550	+ .005	5.260-2.710	+ .005	0.080
430	1.70-2.60	17.63-11.53	1.372	21.84	1.61-1.06	1.70-1.18	5.2-7.5	.588-.385	Brass	104	435A		430	4.300-2.150	+ .005	4.460-2.150	+ .005	0.080
								.501-.330	Alum.	105	437A							
340	2.20-3.20	13.63-9.08	1.736	17.27	1.58-1.05	1.78-1.22	3.1-4.5	.877-.572	Brass	112	553		340	3.400-1.700	+ .005	3.560-1.860	+ .005	0.080
								.751-.492	Alum.	113	554							
284	2.60-3.95	11.53-7.59	2.078	14.43	1.50-1.05	1.67-1.17	2.2-3.2	1.102-.752	Brass	48	54	53	284	2.840-1.340	+ .005	3.000-1.500	+ .005	0.080
								.940-.641	Alum.	75	585	584						
229	3.30-4.90	9.08-6.12	2.577	11.63	1.56-1.05	1.6-2.2							229	2.290-1.145	+ .005	2.418-1.273	+ .005	0.064
187	3.95-5.85	7.59-5.12	3.152	9.510	1.60-1.08	1.67-1.19	1.4-2.0	2.08-1.44	Brass	49	148B	149A	187	1.872-0.872	+ .005	2.000-1.000	+ .005	0.064
								1.77-1.12	Alum.	95	406A	407						
159	4.90-7.05	6.12-4.25	3.711	8.078	1.51-1.05	1.52-1.19	0.79-1.0						159	1.590-0.795	+ .004	1.718-0.923	+ .004	0.064
137	5.85-8.20	5.12-3.66	4.301	6.970	1.47-1.05	1.48-1.17	0.56-0.71	2.87-2.30	Brass	50	343A	344	137	1.372-0.622	+ .004	1.500-0.750	+ .004	0.064
								2.45-1.94	Alum.	106	440A	441						
112	7.05-10.00	4.25-2.99	5.259	5.700	1.49-1.05	1.51-1.17	0.35-0.46	4.12-3.21	Brass	51	52A	51	112	1.122-0.497	+ .004	1.250-0.625	+ .004	0.064
								3.50-2.74	Alum.	68	137A	138						
90	8.20-12.40	3.66-2.42	6.557	4.572	1.60-1.06	1.68-1.18	0.20-0.29	6.45-4.48	Brass	52	40A	39	90	0.900-0.400	+ .003	1.000-0.500	+ .003	0.050
								5.49-3.83	Alum.	67	136A	135						
75	10.00-15.00	2.99-2.00	7.868	3.810	1.57-1.05	1.64-1.117	0.17-0.23						75	0.750-0.375	+ .003	0.850-0.475	+ .003	0.050
62	12.4-18.00	2.42-1.66	9.486	3.160	1.53-1.05	1.55-1.18	0.12-0.16	9.51-8.31	Brass	91	541	419	62	0.622-0.311	+ .0025	0.702-0.391	+ .003	0.040
								6.14-5.36	Alum.	107	---	---						
51	15.00-22.00	2.00-1.36	11.574	2.590	1.54-1.05	1.58-1.18	0.080-0.107		Silver	---	---	---	51	0.510-0.255	+ .0025	0.590-0.335	+ .003	0.040
42	18.00-26.50	1.66-1.13	14.047	2.134	1.56-1.06	1.62-1.18	0.034-0.048	20.7-14.8	Brass	53	596	595	42	0.420-0.170	+ .0020	0.500-0.250	+ .003	0.040
								17.6-12.6	Alum.	121	598	597						
								13.3-9.5	Silver	66	---	---						
34	22.00-33.00	1.36-0.91	17.328	1.730	1.57-1.05	1.62-1.18	0.034-0.048		Brass	---	600	599	34	0.340-0.170	+ .0020	0.420-0.250	+ .003	0.040
									Alum.	---	---	---						
28	26.50-40.00	1.13-0.75	21.081	1.422	1.59-1.05	1.65-1.17	0.022-0.031	21.9-15.0	Silver	96	---	---	28	0.280-0.140	+ .0015	0.360-0.220	+ .002	0.040
22	33.00-50.00	0.91-0.60	26.342	1.138	1.60-1.05	1.67-1.17	0.014-0.020	---	Brass	---	385	383	22	0.224-0.112	+ .0010	0.304-0.192	+ .002	0.040
								31.0-20.9	Silver	97	---	---						
19	40.00-60.00	0.75-0.50	31.357	0.956	1.57-1.05	1.63-1.16	0.011-0.015					19	0.188-0.094	+ .0010	0.268-0.174	+ .002	0.040	
15	50.000-75.000	60-0.40	39.863	0.752	1.60-1.06	1.67-1.17	0.0063-0.0090		Brass	---	385	15	0.148-0.074	+ .0005	0.0202-0.141	+ .002	0.040	
									Silver	98	---	---						
12	60.00-90.00	0.50-0.33	48.350	0.620	1.61-1.06	1.68-1.18	0.0042-0.0060	52.9-39.1	Brass	---	387	12	0.122-0.061	+ .0005	0.202-0.141	+ .002	0.040	
								93.3-52.2	Silver	99	---	---						
10	75.00-110.00	0.40-0.27	59.010	0.508	1.57-1.06	1.61-1.18	0.0030-0.0041					10	0.100-0.050	+ .0005	0.180-0.130	+ .002	0.040	
8	90.00-140.00	0.333-0.214	73.840	.406	1.64-1.05	1.75-1.17	0.0018-0.0026	152-99	Silver	138	---	---	8	0.080-0.040	+ .00003	0.156DIA	+ .001	---
7	110.00-170.00	0.272-0.176	90.840	.330	1.64-1.06	1.77-1.18	0.0012-0.0017	163-137	Silver	136	---	---	7	0.065-0.325	+ .000025	0.156DIA	+ .001	---
5	140.00-220.00	0.214-0.136	115.750	.259	1.65-1.05	1.77-1.18	0.0012-0.00107	308-193	Silver	135	---	---	5	0.051-0.0255	+ .000025	0.156DIA	+ .001	---
4	170.00-260.00	0.176-0.115	137.520	.218	1.61-1.05	1.69-1.17	0.00052-0.00075		Silver	137	---	---	4	0.043-0.0215	+ .000020	0.156DIA	+ .001	---
3	220.00-325.00	0.136-0.092	173.280	.173	1.57-1.06	1.62-1.18	0.00035-0.00047		Silver	139	---	---	3	0.034-0.0170	+ .000020	0.156DIA	+ .001	---

Waveguide Switch

Type GR

Description

The state-of-the-art Type GR Waveguide switch series with ten different waveguide sizes utilizes the unique transactor actuator. This direct coupled actuator is small in size and more reliable than older designs using motors/gears, rotary or linear solenoids. The complete line is available failsafe or latching.

Standard Products

The following are standard for this switch series: failsafe or latching, choke flanges, pressurized, indicator circuits, 28Vdc, power connector.

Special Configuration

Actuating Voltage
Transient Circuit

Transactor Actuator

Transco has used modern motor technology and combined the actuator rotor and switch RF rotor in a single integrated assembly. This exclusive design feature greatly extends the switch life.

RF Circuit: 3 or 4 Port


Actuator: Latching and Failsafe

Connector: WR284 - WR62

Frequency: 2.6-18GHz




RF Performance


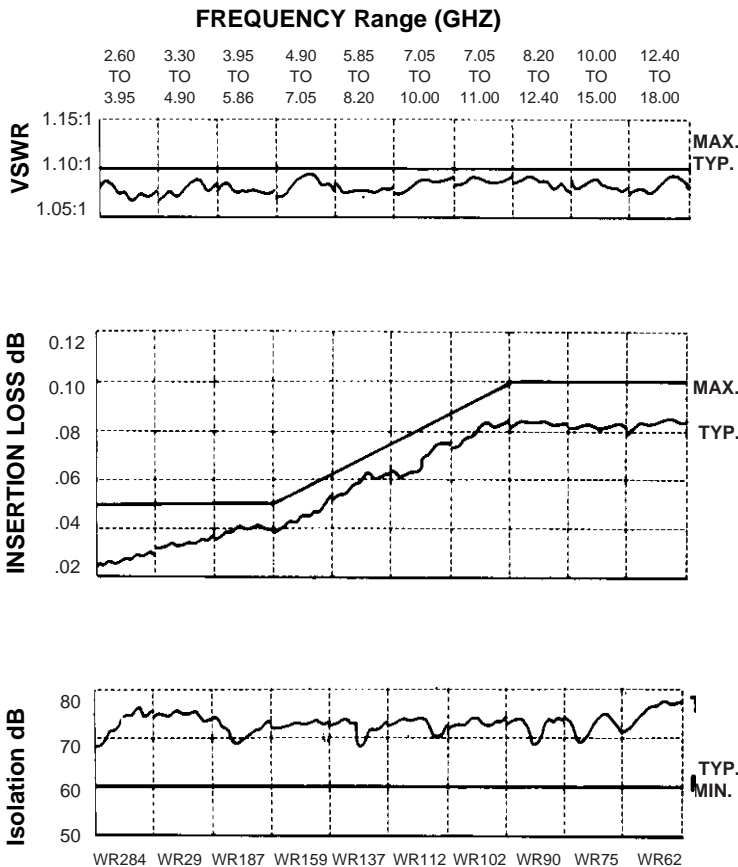


Schematic

#1. Latching




2. Failsafe

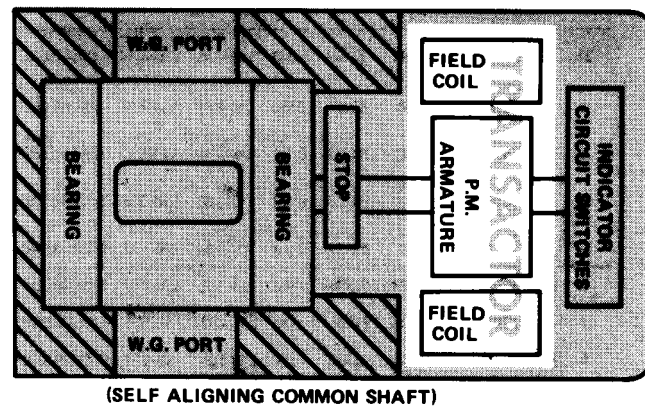


EIA WG DESIGNATION

Positions: 3 or 4 port
 RF Power: equivalent to 90° E-Plane WG bend
 Actuator: "transactor"
 Voltage: 24 to 30Vdc
 Current: see chart
 Switching Time: see chart
 Indicator: for switching position
 Pressurized: 20 psig
 Temperature: -54°C to 95°C
 Life: 200,000 cycles min
 Finish: dull black


Dimensions and Part Numbers

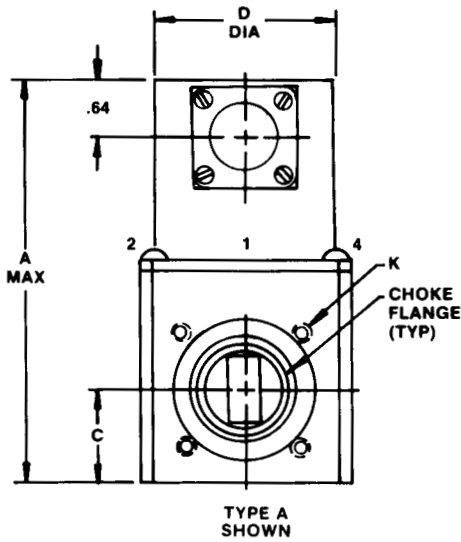

PT02C-10-6P OR MS 3112E-10-6P
 MATES WITH MS 3116E-10-6S OR
 PT06E-10-6S

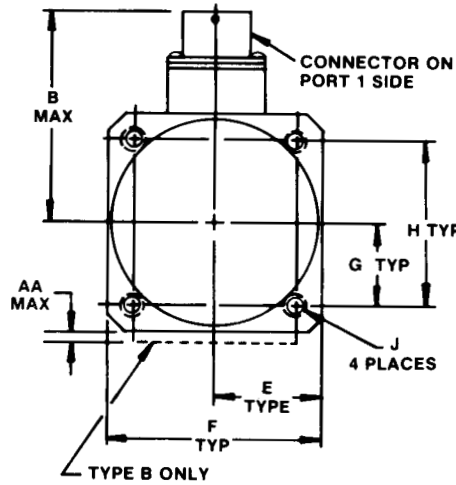

SHOWN IN POSITION 1
 LATCHING - FAIL-SAFE
 DE-ENERGIZED

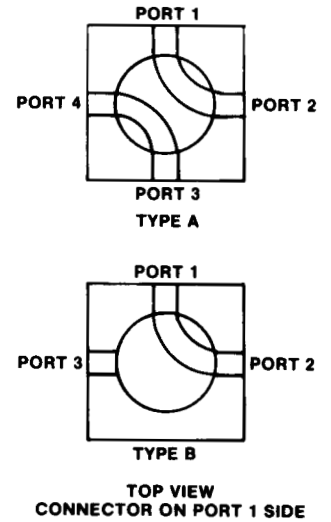

PART NO.	WAVE-GUIDE SIZE	SWITCH TYPE	FREQUENCY RANGE GHz	SWITCHING TIME, MAX	CURRENT AMP MAX (28Vdc, 20°C)	AA	A	B	C	D	E	F	G	H	J	K	WEIGHT LBS. MAX.
33D00100	WR 62	A FAILSAFE	12.4 - 18.00	100MS	.5	-	3.80	1.87	.877	1.850	.9375	1.875	.718	1.437	8-32 x .25 DEEP	6-32 x .22 DEEP	1.3
33D00200	WR 62	A LATCHING	↑	↑	1	-	4.00	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑
33D00300	WR 62	B FAILSAFE	↓	↑	.5	.10	3.80	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑
33D00400	WR62	B LATCHING	12.4-18.00	↑	1	.10	4.00	↑	.877	↑	↑	↑	↑	↑	↑	↑	↑
33D09100	WR 75	A FAILSAFE	10.0 - 15.00	↑	.5	-	3.95	↑	.941	↑	↑	↑	↑	↑	↑	↑	↑
33D09200	WR 75	A LATCHING	↑	↑	1	-	4.15	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑
33D09300	WR 75	B FAILSAFE	↓	↑	.5	.10	3.95	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑
33D09400	WR 45	B LATCHING	10.0-15.00	↑	1	.10	4.15	↑	.941	↑	↑	↑	↑	↑	↑	6-32 x .22 DEEP	↑
33D01100	WR 90	A FAILSAFE	8.20-12.40	↑	.5	-	4.05	↑	1.016	↑	↑	↑	↑	↑	↑	8-32 x .22 DEEP	↑
33D01200	WR 90	A LATCHING	↑	↑	1	-	4.30	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑
33D01300	WR 90	B FAILSAFE	↑	↑	.5	.13	4.05	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑
33D01400	WR 90	B LATCHING	8.20-12.40	↓	1	.13	4.30	1.87	1.016	1.850	.9375	1.875	.718	1.437	8-32 x .25 DEEP	8-32 x .22 DEEP	1.4
33D03200	WR 112	A LATCHING	7.05 - 10.00	↓	1	-	5.10	2.07	1.245	2.25	1.187	2.375	1.000	2.000	10-32 x .31 DEEP	8-32 x .28 DEEP	2.3
33D03400	WR112	B LATCHING	7.05-10.00	100MS	1	.13	5.10	2.07	1.245	2.25	1.187	2.375	1.000	2.000	10-32 x .31 DEEP	8-32 x .28 DEEP	2.3
33D04200	WR 137	A LATCHING	5.85-8.20	150MS	1	-	7.00	2.57	1.750	3.25	2.125	4.250	1.750	3.500	1/4-20 X .40 DEEP	10-32 x .30 DEEP	8.3
33D04400	WR 137	B LATCHING	5.85-8.20	↑	1	.13	7.00	↑	1.750	↑	↑	↑	↑	↑	↑	↑	↑
33D06200	WR 187	A LATCHING	3.95-5.85	↓	1	-	7.50	↑	2.000	↑	↑	↑	↑	↑	↑	↑	↑
33D06400	WR 187	B LATCHING	3.95-5.85	150 MS	1	.13	7.50	↓	2.00	↓	2.125	4.250	1.750	3.500	1/4-20 X .40 DEEP	10-32 x .30 DEEP	9.0
33D08200	WR 284	A LATCHING	2.60-3.95	500 MS	1.5	-	9.00	↓	2.750	↓	2.937	5.875	2.375	4.750	1/4-20 X .50 DEEP	1/4-20 X .40 DEEP	17.0
33D08400	WR 284	B LATCHING	2.60-3.95	500 MS	1.5	.15	9.00	2.57	2.750	3.25	2.937	5.875	2.375	4.750	1/4-20 X .50 DEEP	1/4-20 X .40 DEEP	17.0

Waveguide Switch

Type GF

Description

This is a broad band double ridge waveguide switch similar to DowKey's standard type GR waveguide switches. This simple proven design combines the actuator rotor and switch RF rotor in a single integrated assembly.

Transactor Actuator

This is a low current bi-directional actuator developed by DowKey/Transco. Designed specifically for DowKey/Transco's waveguide switches, this actuator uses torque motor principles conforming to MIL-M-8609 (DC motors) and MIL-M-7960 (AC motors).

Transactor does not require any mechanical coupling devices normally associated with conventional solenoid type actuators. This assures long life and high reliability.

Standard Products

P/N	Schematic	Type
30D01900	A	1
30D01400	B	1

Special Configuration

Actuating Voltage
Transient Circuit

Other Products

P/N	Schematic	Type
30D00500	B	2


Designed to meet MIL-S-55041

RF Circuit: SPDT & Transfer
Actuator: Latching and Failsafe
Connector: WRD350D24
Frequency: 3.5-8.2GHz




Schematic


#1. Latching



2. Failsafe






SHOWN IN POSITION 1

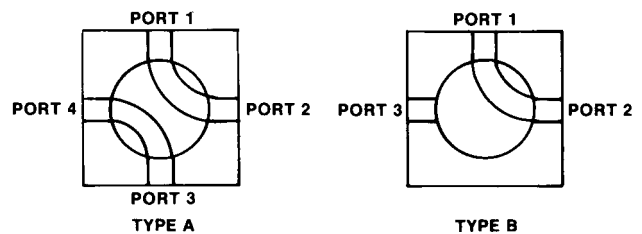



TOP VIEW
CONNECTOR ON PORT 1 SIDE

Specifications

Actuator:
 Voltage: 24 to 30Vdc
 Current: .85 amps max. @ 28Vdc, 20°C
 Switching Time: 150 milliseconds max
 Duty: continuous operation
 Pressurized: 20 psig
 Temperature: -54°C to +84°C
 Life: 200,000 actuations min
 Finish: dull black
 Weight: 9 lb. max

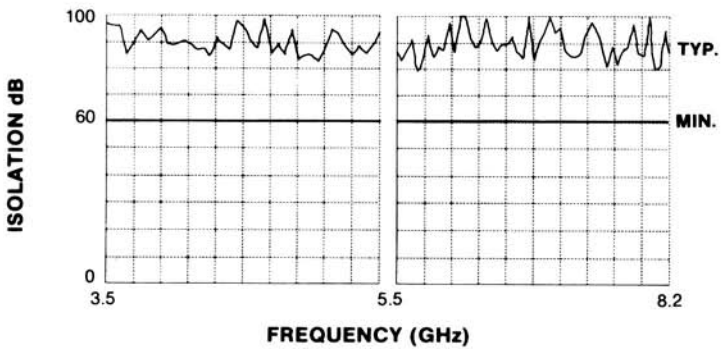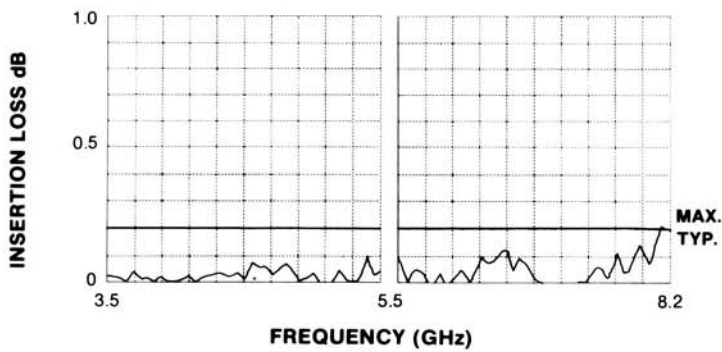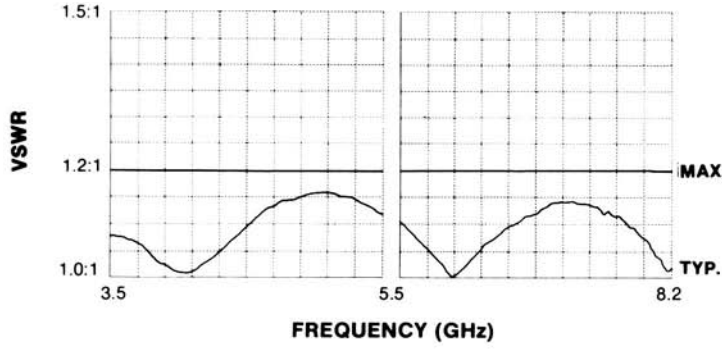

Dimensions

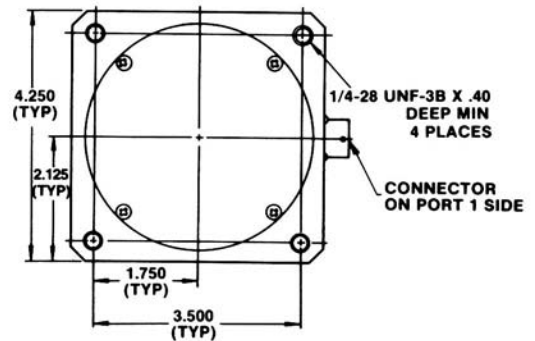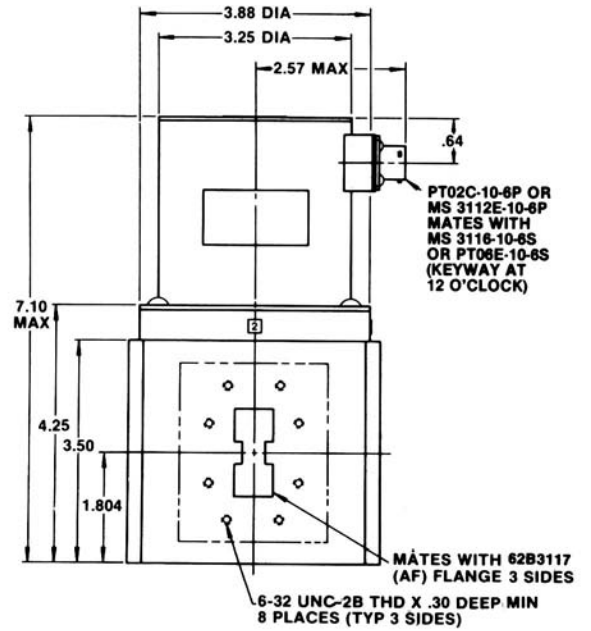

Waveguide Switch

Type GF

Description

This is a broad band double ridge waveguide switch similar to DowKey/Transco's standard type GR waveguide switches. It features the same simple proven design of RF assembly and actuator assembly called "transactor".

Transactor Actuator

This is a low current bi-directional actuator developed by DowKey/Transco. Designed specifically for DowKey/Transco's waveguide switches, this actuator uses torque motor principles conforming to MIL-M-8609 (DC motors) and MIL-M-7960 (AC motors).

Transactor does not require any mechanical coupling devices normally associated with conventional solenoid type actuators. This assures long life and high reliability.

RF Circuit: Transfer
Actuator: Latching and Failsafe
Connector: WRD750D24
Frequency: 7.5-18GHz



Standard Products

P/N	Schematic	Type
30C01200	1	A
30C01300	1	B

Special Configuration


Actuating Voltage
 Transient Circuit

Other Products



P/N	Schematic	Type
30C02000	2	A
30C02100	2	B

Schematic

#1. Latching



2. Failsafe

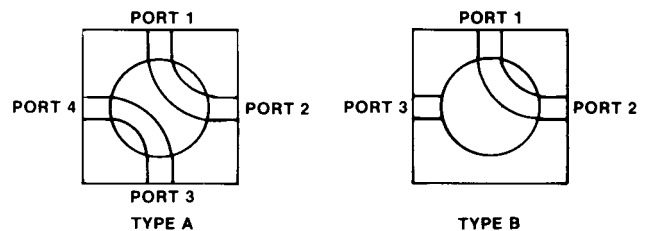

TOP VIEW
 CONNECTOR ON PORT 1 SIDE

Specifications

Actuator:
 Voltage: 24 to 30Vdc
 Current: .80 amps max. @ 28Vdc, 20°C
 Switching Time: 100 milliseconds max
 Duty: continuous operation
 Pressurized: 20 psig
 Temperature: -54°C to +84°C
 Life: 200,000 actuations min
 Finish: dull black
 Weight: 1.3 lb. max

Dimensions

