


Intrinsically-Safe Torches Lite-Ex 15, 20, 23, 25


Lite-Ex 25

25,5 cm

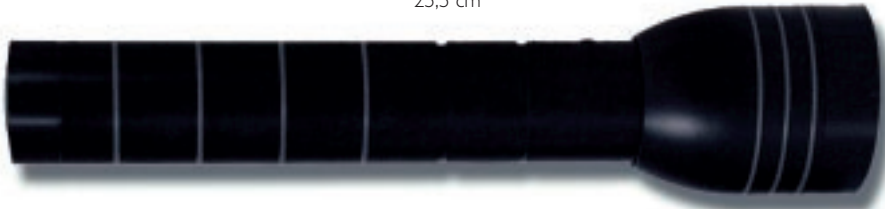

Lite-Ex 23

22,7 cm

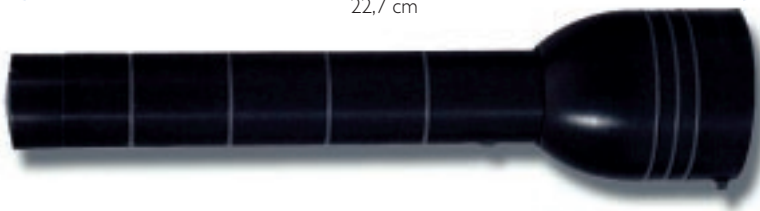


Lite-Ex 20

19,5 cm



Lite-Ex 15

14,8 cm

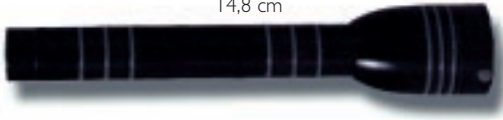

Lite-Ex ..

.....non-sparking aircraft aluminium!

The ultimate range of intrinsically-safe torches - with handy features such as adjustable beam focus, anti-roll device and integrated spare bulb. Housed in a solid metal casing that has integral rubber rings to provide a sure grip in hazardous areas.

Ex-data:

Ex designation:

Ⓜ II 2 G EEx e ia IICT4

EC-Certificate of conformity:

TÜV 99 ATEX 1409

Accessories:

Lite-Ex 25

- Leather carry case
- Spare bulb type AC2C/2D/BB

Lite-Ex 23

- Leather carry case
- Spare bulb type AC2C/2D/BB

Lite-Ex 20

- Leather carry case, spare lens
- Spare bulb type AC2300/BB

Lite-Ex 15

- Nylon case, spare lens
- Spare bulb type AC2640/BB

Technical data:

	Lite-Ex 25	Lite-Ex 23	Lite-Ex 20	Lite-Ex 15
Ambient temperature Ta:	-40°C +40°C	-40°C +40°C	-40°C +40°C	-40°C +40°C
Power supply:	2 x LR 20	2 x LR 14	3 x LR6	2 x LR6
Bulb:	AMPERCELL AC2C/2D/BB	AMPERCELL AC2C/2D/BB	AMPERCELL AC2300/BB	AMPERCELL AC2640/BB
Operating time:	up to 17 h	up to 9 h	up to 5 h	up to 4,5 h
Ingress protection:	IP 54	IP 54	IP 54	IP 54
Weight:	approx 400 g	approx 270 g	approx 82 g	approx 70 g

