

# i.roc x10 -Ex

light, ergonomic and robust - optimised for high productivity!



*The ecom i.roc x10 -Ex is a high performance industrial PDA based on Windows Mobile™, with compact external dimensions, an integrated WLAN, USB, Bluetooth™ and an IrDA port.*

Able to meet the diverse needs and requirements of industry operating both inside and outside of Ex-hazardous areas, the **i.roc** is available in three different versions along with a comprehensive range of Ex-certifications.

- Ergonomic design facilitates operation without fatigue during continuous use.
- High-resolution colour display, can be read under even the most unfavourable light conditions.
- Protection from static electricity, water and dust; shockproof housing (non-corroding)

**ecom**  
instruments

# Technical description

## **Extended front housing**

for options such as Barcode-Imager  
BC x10-Ex and RFID-Module RF x10-Ex

Dust- and water-tight,  
anti-static, conductive  
housing, IP 65



LED indicators for  
charging and  
connectivity status

3.5" TFT display with  
16K colour depth,  
protected by a  
Makrolon™ panel

Standard keyboard with  
5-way navigation field  
and 5 programmable keys

Microphone and loudspeaker



Optional Hand Loop -  
for safe and secure  
handling in all weathers



**Standard front housing**  
Compact, lightweight,  
ergonomic

Attachment points for  
optional holders


integrated Bluetooth 1.1  
Class 2 interface



integrated WLAN card  
IEEE 802.11b compatible

Infrared port  
IrDA 1.1 (115.2 BK/s)

Convenient yet secure - 2 slots  
for stylus pens

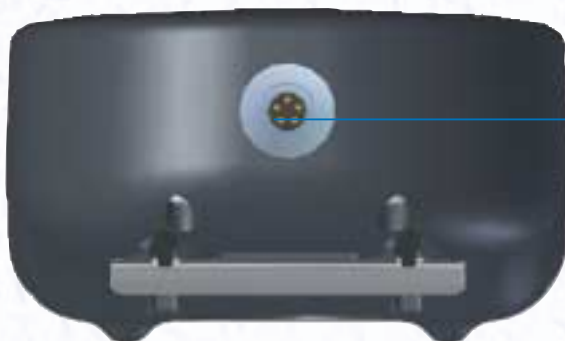

Battery charging socket with  
integrated USB port connection



# Details

## Barcode Imager BC x10 -Ex

The automatic recording of data and its implementation in a wide range of concepts is of ever-increasing importance. It has become essential to store as much data as possible in as small a space as possible. Furthermore, it must also be possible to read and process the data reliably.



The late 1980s marked the beginning of some new approaches to barcodes. The first stacked barcodes were developed, followed in the 90s by 2D, or matrix codes.

Today, according to conservative estimates, there are over 30 different symbologies available on the market. The optionally integrated CMOS Barcode Imager BC x10 expands the functions of the *i.roc* x10 to include reading of all common barcodes – 1D linear codes, 2D stacked/matrix codes, OCR fonts, and postal codes. This module is equipped with an omni-directional (360°) scan area and a two-colour aimer to enable masking of the scan area. It is also possible to take 640x320-pixel black-and-white photographs.

### Technical data:

Barcodes which can be read:

2D: PDF417, MicroPDF417, MaxiCode, Data Matrix, QR Code, Aztec, Aztec Mesas, Code 49, EANUCC Composite, Snowflake\*, Dataglyphs\*  
Linear: Code 39, Code 128, Codabar, UPC, EAN, Interleaved 2 of 5, Reduced Space Symbology, Code 93, Codablock F, BC412\*

Postal: Postnet, Planet Code, British, Canadian, Japanese, KIX (Netherlands)

OCR Fonts: OCR-A and OCR-B (\*can be enabled for licensed customers)

Focal point: (17.8cm) from lens plate (nominal)

### Working range:

	8 mil Linear (.020cm)	10 mil PDF417 (.025cm)	13 mil UPC (.033cm)	15 mil PDF417 (.038cm)	15 mil Data Matrix (.038cm)	35 mil MaxiCode (.089cm)
Near:	(8.9cm)	(7.9cm)	(6.4cm)	(8.9cm)	(9.4cm)	(5.1cm)
Far:	(19.3cm)	(22.9cm)	(31.8cm)	(28.4cm)	(16.5cm)	(33cm)

Rotational sensitivity:	360°
Viewing angle:	±40°
Ambient light:	535 to 100,000 lux (full sunlight)

## Keyboard



Even more than with other devices, industrial PDAs need to have a reliable, fast and easy-to-use method for inputting data. In response to these requirements, **ecom instruments** has decided on a new approach – a virtual fullscreen keyboard.

So, problems with worn and dirty keypads, ingress of dust and contaminants and a lack of keypad illumination can now be a thing of the past.

- Optimally designed for data input whilst wearing gloves
- Selection of three different layouts (numeric, alpha, special)
- Quick toggle key



## RFID-Module RF x10 -Ex

Our robust RFID read/write systems have been specially developed for use in production, logistics, and in commercial contexts. They are flexible in operation, and provide quick, reliable identification of objects at various distances. The user memory has a depth of up to 992 bytes, depending on the transponder type, making it possible for the operator to store production-related information on the transponder, even without a connection to a database (offline operation).



The RFID Module is the ideal solution anywhere that mobile data storage is required, e.g. in object identification, servicing, temporary storage or warehouse management.

- Can be integrated in to existing systems
- Relatively long reading range
- ISO 15693 compatible
- Collision avoidance, recording from more than one transponder in a field
- Software can be updated

### Technical data:

Operating frequency:	13,56 MHz
Read/write range:	up to 80 mm, depending on the transponder type and environment
Data transmission speed:	approx. 26 kBit/s
Writing to transponder:	< 50 ms per block
Reading from transponder:	< 50 ms per block
Transponder types:	ISO 15693, Tag-It, I-CODE, EM, SLI, HFI, LRI and Infineon

## Accessories

An extensive range of accessories are available (e.g. leather carrying case, hand loop, USB data transmission set, holders and additional batteries for use in cars, charging cable) – meaning that you are sure to find a suitable solution, no matter what the application. Therefore, it is possible to meet the needs and demands of most requirements. However, if there are particular requirements needed - then please contact us as we will be happy to assist in developing individual solutions.



Leather case with belt holder and carrying strap.



# Technical data

<b>Housing</b>		<b>Hardware and software development</b>	
Protection rating:	IP 65 (immersion for brief periods)	HTML, XML	
Housing:	Anti-static, non-corroding housing	SDK for MS Visual Studio, MS Embedded Visual C++ and Java	
Shock resistance:	1,2 m on to concrete	HDK - Hardware Development Kit	
<b>Dimensions</b>		Microsoft .NET Compact Framework	
L x W x D:	178 x 85 x 39 mm	JVM - Java-Virtual-Machine	
	max. 224 x 89 x 49 mm (Extended upper part of housing)	Standard protocol APIs for Windows sockets (Windows CE)	
Storage:	-10°C.....+60°C	<b>Infrared specification</b>	
Permissible temperature range for charging:	-0°C ..... +45°C	Specification:	IrDA 1.1
<b>Relative humidity</b>		Transmission rate:	115,2 KB/s
Operation:	up to 80%	<b>Bluetooth specification*</b>	
Storage:	up to 80%	Bluetooth specification:	1.1 compatible (2.4-GHz ISM)
<b>Maximum altitude</b>		System Interface:	High-speed UART processor
Operation:	up to 4,572 m	User Interface:	Bluetooth Manager
Storage:	up to 12,192 m	Device type:	Class II, 4 dBm transmitter power, typically 5 m in an industrial environment
<b>Processor</b>		Receiver sensitivity:	-78 dBm
Intel® XScale™-PXA255 400 MHz processor		<b>WLAN specification*</b>	
<b>Power supply</b>		Network standard:	IEEE 802 Part 11b (802.11b)
Rechargeable lithium-ion battery (1800 mAh)		Frequency band:	2.4000 - 2.4835 GHz (EU)
Note: The battery's service period depends on the user's operating habits and the PDA's configuration. The use of internal wireless functions and background lighting reduces this period.			2.4465 - 2.4835 GHz (France)
(Additional batteries are available on request)			2.4000 - 2.497 GHz (Japan)
<b>Memory</b>		Antenna:	embedded inverted F antenna
RAM 64 MB SDRAM (55 MB available)		WEB Security:	64/128-bit compatible with IEEE 802.11
ROM 32 MB Flash-ROM memory		Network architecture:	Ad-hoc (peer to peer)
2,8 MB iPAQ File Store (NVRAM)			Infrastructure (access points required)
<b>TFT colour display</b>		Modulation:	DBPSK, DQPSK, CCK
Resolution:	(W x H) 240 x 320 pixels	Receiver packet error rate:	11 Mbps: <-80 dBm, 5.5 Mbps: <-82 dBm, 2 Mbps: <-86 dBm, 1 Mbps: <-89 dBm
Dot pitch:	0.24 mm	Reception strength:	-10dBm (1/2/5.5/11 Mbps)
Screen diagonal:	89 mm	Transmitter power (max.):	15 dBm (FCC SARS requirements)
Display type:	64K (16-bit) transfective colour TFT with LED background lighting	Power Management:	On/Off monitoring by operating system
<b>Keyboard</b>			Connections icon, power save mode
On/Off switch, reset, 4 programmable quick-access keys, 5-way navigation field (customer-specific design possible)		Power consumption:	Send mode: < 380 mA
<b>Stylus</b> Quantity two (included in standard delivery)			Receive mode: < 280 mA
<b>System upgrades</b>		Power Safe Mode:	802.11 compatible
Integrated SD slot (supports SD/MMC standard, SDIO-ready)		Protocols:	CSMA/CA (collision avoidance) with ACK, TCP/IP, IPX/SPX, UDP
Note: In the Ex-versions 51x -Ex and 61x -Ex, the customer may not exchange this card. To exchange the card, the device must be sent to the manufacturer. With the 41x version, the card can be exchanged by the user.		SAR:	1.0 mW/g
<b>Operating system</b>		Data throughput:	>4.5 Mbps
Microsoft Windows Mobile 2003 Software for Pocket PC - Premium edition		Range:	80 meter in open spaces
<b>Standard applications</b>		Certificates:	Contains all required certificates for the countries supported (WECA Wi-Fi)
Calendar, contacts, voice recorder, notes, Pocket Word (with character recognition), Pocket Excel, Pocket Internet Explorer, Windows Media Player 9 (MP3, audio and video streaming), calculator, Microsoft Reader (eBooks), File Explorer, pictures, terminal services client, VPN client, infrared Beaming		*Note: A WLAN standard infrastructure, additional Bluetooth-enabled units and a service contract with a Wireless provider could possibly be required for wireless communication to function. A separate contract is required for GSM Internet use. Your provider can inform you on the availability and extent of the offer. Not all web contents are available. Wireless cards and accessories can be purchased at additional cost.	
<b>Language:</b>			
Standard: English (other languages are available on request)			

# Certifications



Certification	Model	Memory	Weight	Operating Temperature Range	Part No.
<b>ATEX Zone 1</b>	<i>i.roc</i> 610-Ex		approx. 750 g	-10°C.....+50°C	AS002766
"	<i>i.roc</i> 611-Ex	+ 256 MB	"	"	AS002761
"	<i>i.roc</i> 612-Ex	+ 512 MB	"	"	AS002762
<b>Mining</b>	<i>i.roc</i> 613-Ex		approx. 750 g	-10°C.....+50°C	AS002763
"	<i>i.roc</i> 614-Ex	+ 256 MB	"	"	AS002764
"	<i>i.roc</i> 615-Ex	+ 512 MB	"	"	AS002765
<b>FM Class 1/Div. 1</b>	<i>i.roc</i> 617-Ex		approx. 750 g	-10°C.....+50°C	AS002767
"	<i>i.roc</i> 618-Ex	+ 256 MB	"	"	AS002768
"	<i>i.roc</i> 619-Ex	+ 512 MB	"	"	AS002769
<b>ATEX Zone 2</b>	<i>i.roc</i> 510-Ex		approx. 410 g	-10°C.....+50°C	AS002776
"	<i>i.roc</i> 511-Ex	+ 256 MB	"	"	AS002771
"	<i>i.roc</i> 512-Ex	+ 512 MB	"	"	AS002772
<b>FM Class 2/Div. 2</b>	<i>i.roc</i> 517-Ex		approx. 410 g	-10°C.....+50°C	AS002777
"	<i>i.roc</i> 518-Ex	+ 256 MB	"	"	AS002778
"	<i>i.roc</i> 519-Ex	+ 512 MB	"	"	AS002779
<b>Ruggedized</b>	<i>i.roc</i> 410-Ex		approx. 410 g	-10°C.....+60°C	AS002786
"	<i>i.roc</i> 411-Ex	+ 256 MB	"	"	AS002781
"	<i>i.roc</i> 412-Ex	+ 512 MB	"	"	AS002782

## Accessories (suitable for all of the above versions)

Leather case with belt holder and shoulder strap	A0002777
Hand loop	A0002778
USB data transmission set	A0002779
Barcode Imager BC x10 -Ex	A0002768
RFID Module RF x10 -Ex	A0002767



### Ruggedized

***i.roc* 41x:**  
 IP 65  
 (immersion for brief periods)  
 Shock resistance 1,2 m



### Ex-zone 2

**Ex-data *i.roc* 51x -Ex:**  
 Ex designation  
 Ⓢ II 3G EEx nL IIC T6  
 Ⓢ II 3D T99°C IP 65  
 ZELM 04 ATEX 3201



### Ex-zone 1

**Ex-data *i.roc* 61x -Ex:**  
 Ex designation  
 Ⓢ II 2G EEx ia IIC T4  
 Ⓢ II 2D T99°C IP 65  
 ZELM 04 ATEX 0200



# The complete $\text{Ex}$ -solution

**ecom**  
instruments

- Marketing
- Distribution
- Production
- ATEX

**ecom**  
engineering

- Development
- Advice & Planning
- Customer-specific Ex-solutions

**ecom**  
WEBfactory

- Process visualisations based on Internet technologies
- Software development

